

# The fOOrth User's Guide and Reference

*An RPN, object oriented language that is not FORTH.*

*by Peter Camilleri*

Last Update: August 11, 2015

Covering fOOrth version 0.4.0

Status: Unpublished



## Table of Contents

The MIT License (MIT).....	5	<i>Handling Errors</i>	39
Introduction.....	7	<i>Generating Errors</i>	44
<i>About the name fOOrth</i>	7	<i>fOOrth Native Exception Codes:</i>	45
<i>How fOOrth came to be</i>	7	<i>Application Error Codes:</i>	46
<i>Goals and Principles</i>	9	<i>Ruby Mapped Exception Codes:</i>	46
<i>About Ruby</i>	10	A Brief Overview of Key OO Concepts.....	51
<i>Special Notes of Thanks</i>	10	<i>Class Based OO</i>	51
<i>Report Card</i>	10	<i>Class Based Inheritance</i>	51
Installation.....	13	<i>Prototype Based OO</i>	53
<i>Ruby</i>	13	<i>Methods in fOOrth</i>	53
<i>fOOrth</i>	14	<i>Late Binding and Polymorphism</i>	54
<i>Installing from GitHub</i>	14	<i>Summary</i>	54
<i>Contributing</i>	14	Method Mapping.....	55
<i>Running fOOrth</i>	15	<i>Exploring the mapping system</i>	55
<i>Testing</i>	15	Context.....	57
<i>Source Archive</i>	16	<i>Exploring Context</i>	57
First Steps.....	17	<i>Tracking the Virtual Machine</i>	59
The Syntax and Style of fOOrth.....	19	Routing.....	61
<i>Syntax</i>	19	<i>Virtual Machine Methods</i>	61
<i>Spaces</i>	19	<i>Shared Methods</i>	62
<i>Comments</i>	19	<i>Exclusive Methods</i>	62
<i>String Literals</i>	20	<i>Shared Stub Methods</i>	63
<i>Numeric Literals</i>	20	<i>Exclusive Stub Methods</i>	63
<i>Procedure Literals</i>	20	<i>Local Methods</i>	63
A fOOrth Calculator.....	21	<i>Routing Internals</i>	64
<i>The Basics</i>	21	Self.....	67
<i>Stack Manipulation</i>	22	<i>Applying Self</i>	67
<i>Programming</i>	24	<i>Changing Self</i>	68
<i>Control Structures</i>	25	Boolean Data.....	69
<i>Data Memory</i>	29	<i>What values represent true and false?</i>	69
Data Storage in fOOrth.....	31	<i>Processing Boolean Data</i>	69
<i>Typing</i>	31	<i>Boolean Constants</i>	69
<i>Declarations</i>	31	Numeric Data.....	71
<i>Scoping</i>	31	Procedure Data.....	73
<i>Referencing</i>	32	<i>Values and Indexes</i>	73
<i>Mutation</i>	33	A fOOrth Reference.....	75
Cloning Data.....	35	Array.....	77
<i>Deep vs Shallow Copy</i>	35	<i>Array Literals</i>	77
<i>Permissive Copying</i>	38	<i>Class Methods</i>	79
Handling Exceptions.....	39	<i>Instance Methods</i>	81
<i>The Nature of Exceptions in fOOrth</i>	39	Class.....	97

<i>Instance Methods</i>	97	<i>Commands</i>	187
<i>Commands</i>	102	OutStream.....	189
Complex.....	103	<i>Class Methods</i>	189
<i>Complex Literals</i>	103	<i>Instance Methods</i>	191
<i>Instance Methods</i>	104	<i>Class Stubs</i>	193
<i>Instance Stubs</i>	106	Procedure.....	195
Duration.....	107	<i>Procedure Literals</i>	195
<i>Creating Duration Values</i>	108	<i>Instance Methods</i>	196
<i>Special Duration Values</i>	109	Queue.....	199
<i>Duration Formatting</i>	110	<i>Instance Methods</i>	199
<i>Class Methods</i>	112	Rational.....	201
<i>Instance Methods</i>	113	<i>Rational Literals</i>	201
FalseClass.....	121	<i>Instance Methods</i>	201
<i>FalseClass Literals</i>	121	Stack.....	205
<i>Instance Methods</i>	121	<i>Instance Methods</i>	205
Float.....	123	String.....	207
<i>Float Literals</i>	123	<i>String Literals</i>	207
<i>Instance Methods</i>	124	<i>Format Strings</i>	208
Hash.....	127	<i>Instance Methods</i>	212
<i>Hash Literals</i>	127	Thread.....	227
<i>Instance Methods</i>	129	<i>Class Methods</i>	227
InStream.....	133	<i>Instance Methods</i>	228
<i>Class Methods</i>	133	Time.....	231
<i>Instance Methods</i>	134	<i>Creating Time Values</i>	231
<i>Class Stubs</i>	135	<i>Special Time Values</i>	232
Integer.....	137	<i>Time Formatting</i>	233
<i>Integer Literals</i>	137	<i>Class Methods</i>	236
<i>Instance Methods</i>	138	<i>Instance Methods</i>	238
Mutex.....	143	<i>Class Stubs</i>	247
<i>Class Methods</i>	143	TrueClass.....	249
<i>Instance Methods</i>	144	<i>TrueClass Literals</i>	249
NilClass.....	145	VirtualMachine.....	251
<i>NilClass Literals</i>	145	<i>Instance Methods</i>	252
<i>Instance Methods</i>	145	<i>Commands</i>	276
Numeric.....	147	Appendix A – Symbol Glossary.....	283
<i>Special Numeric Values</i>	147	Appendix B – Regular Expressions.....	285
<i>Instance Methods</i>	150	Appendix C – Git.....	287
Object.....	173	Edit History:.....	293
<i>Instance Methods</i>	173		

## The MIT License (MIT).

Copyright © 2014, 2015 by Peter Camilleri

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the “Software”), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED “AS IS”, WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.



## Introduction

Thank you for taking a moment to peruse the fOOrth user's guide and reference. The following pages, chapters, and sections deal with fOOrth, an experiment in FORTH inspired language design and compiler implementation in Ruby. In particular, a special focus on object oriented design and meta-programming was applied to the language and its implementation.

It must be stressed that as an experiment, it is likely the fOOrth is not especially suited to any particular purpose, aside from research. Then again, perhaps some use beyond academic interest will be found.

On a related matter, as an esoteric research language, neither fOOrth nor this User's Guide is a good programming introduction for a beginner or early programmer. On the contrary, the “raw frontier” nature of this work makes it far more suitable to those well versed in a three or more languages, or at the very least, having an in depth knowledge of Ruby (that's Ruby, not Ruby on Rails, see Ruby below) or Smalltalk.

Again, thank you for your interest; Any comments, suggestions, fixes, improvements, or criticisms are most welcomed.

### ***About the name fOOrth***

The name of programming language fOOrth is an example of a malamanteau<sup>1</sup>. That is a portmanteau of a malapropism.

The portmanteau portion of this is the mash-up of FORTH<sup>2</sup> and the “OO” of object oriented programming<sup>3</sup> systems. It is short, easy to pronounce, slightly witty, and a unique opportunity to describe an actual word as being a malamanteau.

The malapropism involved is quite simply that fOOrth is not FORTH. While the acronym FNF, for fOOrth is **Not FORTH**, is also short, it is not at all easy to pronounce as fOOrth.

### ***How fOOrth came to be***

I have had a fascination with stack based, postfix notation programming environments going back over 30 years. This started with those awesome calculators by Hewlett Packard<sup>4</sup>. I could never afford to buy one, but I was always intrigued by their elegant, expressive power compared with more conventional calculators.

Later, as part of a college course I was tasked with creating a programming language interpreter. I must admit I was struggling with this task. Then one Sunday afternoon, while visiting my Uncle Sal, I began working away at his Radio Shack TRS-80 Computer in Basic. In the course of a two hour programming session, I had created a tiny stack based calculator. Inspired by the simplicity of this simple interpreter, I was able to design a fuller version that ran on the University's PDP-10 mainframe in APL. Yes it ran fairly slowly. The odd thing was that

1 Malamanteau, see XKCD 739 at <http://xkcd.com/739/>, [http://en.wikipedia.org/wiki/Xkcd#Recurring\\_items](http://en.wikipedia.org/wiki/Xkcd#Recurring_items)

2 See [http://en.wikipedia.org/wiki/Forth\\_\(programming\\_language\)](http://en.wikipedia.org/wiki/Forth_(programming_language)), [http://en.wikipedia.org/wiki/Charles\\_H.\\_Moore](http://en.wikipedia.org/wiki/Charles_H._Moore)

3 See [http://en.wikipedia.org/wiki/Object-oriented\\_programming](http://en.wikipedia.org/wiki/Object-oriented_programming)

4 See <http://en.wikipedia.org/wiki/Hewlett-Packard>, [http://en.wikipedia.org/wiki/HP\\_calculators](http://en.wikipedia.org/wiki/HP_calculators), and <http://www.hpmuseum.org/>

compared to the other student's efforts, it ran amazingly *fast*! The simplicity of the syntax meant that little time was wasted parsing and analyzing the source text.

Some years later, I was involved in a major project developed in FORTH during which I came to admire and appreciate the expressive power of the language. While the project was not successful in the end, this was largely a consequence of the nearly impossible goals we had set for ourselves and not a reflection of FORTH. Well not much of a reflection on FORTH as we'll see next.

FORTH today is about as dead a language as you are going to find. Like other extinctions throughout history, this can be traced by its utter failure to adapt to changing conditions. When FORTH was born, most computers were very primitive. They had very little processing power, microscopic memory resources and mass storage, and lacked any form of operating system, file storage, or peripherals; user interfaces were upper case only ASCII subsets. In this environment FORTH was an excellent choice. Systems were tiny and FORTH fit those systems well, and its supporters liked things that way. As computers improved, FORTH stood still. File systems, floating point math, memory management, improved user interfaces all came to everyday computers, but not to FORTH<sup>5</sup>.

FORTH was still efficient and fast, but computers continued to get more and more memory, processing power, and advanced I/O. FORTH was static, stationary, and dying. To this day, FORTH is *still* largely an upper case only language. Just recently. I remember watching in disbelief a video in which a spokesperson for the company Green Arrays, Inc<sup>6</sup> stated that an enhancement to their FORTH oriented processor would be to *limit* the addressable memory to a mere 64 words. How out of touch with reality do you have to be to think that such limited memory is an *asset*?

So if FORTH is so stone age, primitive and extinct, why do this fOOrth thing? It goes back to the heart of fOOrth and FNF. Remember, fOOrth is *not* FORTH. In spite of its problems, the expressive elegance of FORTH cannot be denied. The fOOrth system is an attempt to project where FORTH might have gone had it supporters been more progressive. The fOOrth system is dedicated to destroying limitations, not exalting them.

Given all what has been written, there is still one inescapable fact. FORTH did possess a simplicity and clarity that made it attractive. The fOOrth language needs to retain this essential simplicity as much as possible while avoiding the corner-cutting that made FORTH miserable for many tasks. The fOOrth language needs to retain this sense of small, understated elegance.

Finally, fOOrth is inspired by the development of Object Oriented<sup>7</sup> and Message Passing<sup>8</sup> paradigms<sup>9</sup> pioneered in the Smalltalk<sup>10</sup> programming language. While Smalltalk, is a fairly obscure language today, there can be no doubt of its tremendous impact on modern programming language thought and design.

In the following sections, the underlying principles of fOOrth will be examined to provide a basis for a detailed look at the architecture, features, and facilities of the language system.

---

5 Yes all of these things were added, but always as optional, poorly supported extensions. They were never really part of the core language with the full support they needed.

6 See Green Arrays, Inc. at <http://www.greenarraychips.com/>

7 See [http://en.wikipedia.org/wiki/Object-oriented\\_programming](http://en.wikipedia.org/wiki/Object-oriented_programming)

8 See [http://en.wikipedia.org/wiki/Message\\_passing](http://en.wikipedia.org/wiki/Message_passing)

9 See <http://en.wikipedia.org/wiki/Paradigm>

10 See <http://en.wikipedia.org/wiki/Smalltalk>



## **Goals and Principles**

To move forward, fOOrth has adopted a few basic goals and principles. These are:

- 1) A Simple, Easy-to-Understand syntax that is none the less, expressive and compact:
  - Source code in fOOrth is free-form with no line oriented limitations or rules.
  - Support is given to the easy representation of common literal data such as strings, integers, floating point numbers, rational numbers, and complex numbers.
- 2) Safe Data and Data Structures:
  - Simple, reliable arithmetic. In fOOrth, integer operations never overflow. Rational values can be represented exactly, complex numbers are supported, and conversions between numeric types are simple.
  - Strings grow as needed without the need to allocate space or worry about overflow.
  - Data containers such as arrays and hashes grow as needed. Out of range subscripts cannot access undefined memory regions.
- 3) Message Passing:
  - In fOOrth all actions take the form of messages sent to a receiver.
  - The routing of messages is specified by the exact type of the message.
  - Message receivers include data items on the stack as well as the virtual machine object associated with the current thread of execution.
  - Messages for which no routing specification can be found, generate an error at compile time.
- 4) Object Oriented Design:
  - Support class based inheritance, with a non-cyclic (single inheritance) tree derived from a common base Object class.
  - Support late binding and polymorphism through message interface compatibility or “duck” typing.
- 5) Meta programming:
  - Support extensible language constructs by making the compiler an accessible part of the system.
- 6) Reliability:
  - As much as is possible, invalid operations should generate errors rather than erroneous results
  - Errors should be detected as soon as possible.
- 7) Building on the host language:
  - The fOOrth language is built upon the Ruby language. To leverage this, fOOrth has the ability to build proxy connections to Ruby classes and facilities.

## ***About Ruby***

The fOOrth language is implemented in Ruby. The reasons for this are very simple:

- Ruby is a powerful, expressive language with introspection and meta-programming tools that make it ideal for creating new programming languages.
- Programming in Ruby is pure joy and I'd rather not be miserable. In fact, one of the stated goals of the language was to maximize programmer joy. Success achieved!

Now I need to make a clarification here. I speak of Ruby, not its popular offspring Ruby on Rails. In the minds of many theses are the same thing; they are not<sup>11</sup>.

Ruby is a flexible, powerful language akin to an artist's studio with a wide choice of media, pigments, tools, and techniques to create his masterpieces. Rails is a web server framework, more like a government sponsored art program with strict guidelines, and helpers to “guide” the hand of the artist to produce any work of art so long as it is a portrait of Elvis on black velvet. As you might gather, I really really like Ruby. Ruby on Rails, not so much.

## ***Special Notes of Thanks***

Firstly: This project, as well as this User Guide owe a huge debt of gratitude to the Wikipedia<sup>12</sup> project. Throughout this guide, entries from the free encyclopedia are used to illustrate and amplify many crucial concepts. Wikipedia is supported by donations and I urge all to add their support. I am proud to do so myself each year.

Secondly: My thanks must go to Dave Thomas, Chad Fowler, and Andy Hunt for their excellent work in the book “Programming Ruby 1.9 & 2.0” (aka the PickAxe book for its cover art). The fOOrth language is written in Ruby and without the three editions of that awesome book, my dead-ends, difficulties, and wasted effort would have been greatly multiplied.

Furthermore, the astute reader will not fail to observe that this document is very much fashioned in the style (if not the quality) of the PickAxe book. This imitation is my sincere flattery of the original.

## ***Report Card***

Naturally, it remains to be seen how well fOOrth is at actually accomplishing these lofty goals and living up to these principles. It may be imagined that at some later date, this guide could contain a “report card” examining this topic. For now, this matter is left as an exercise for the reader.

## ***Update for V0.0.3***

This version finds fOOrth with most of the core functionality and an initial draft user's guide and reference manual. This effort has taken a lot longer than was originally anticipated, but is now ready to proceed with incremental improvements.

---

<sup>11</sup> Time after time, most people I speak to, assume that as a Ruby developer, I must really be a Rails developer.

<sup>12</sup> See [http://en.wikipedia.org/wiki/Main\\_Page](http://en.wikipedia.org/wiki/Main_Page)

## Update for V0.0.4

This minor version change was largely a test of the new Git branching model for development. Some notable code enhancements included:

- Fixes for class/subclass creation mode issues.
- The 2drop and 2dup methods.

## Update for V0.0.5

Enough small changes accumulated to justify a step in version. Some notable changes:

- Support for nested contexts with no mode change.
- Array and Hash literals now run in the current mode rather than always deferred.
- Added the .empty method to Array and Hash; Added .length to Hash.
- Numerous fixes for Rational math. Conversions and rounding now more intuitive.
- Added the .join and .split methods to Array.
- Added missing documentation to the Thread class.
- Arrays and Hashes now display in fOOrth format. Previously Ruby formatting was used.

## Update for V0.0.6

Re-factored the compiler sub-system.

## Update for V0.0.7

Hot fix for a re-factoring bug and inadequate testing.

## Update for V0.1.0

Significant changes: The introduction of Procedure Literals as an integral part of the compiling process. For linguistic harmony, methods like .each{ ... } are now .each{{ ... }} to match the way procedure literals work with {{ ... }}. This change has resulted in a large reduction in the need for helper methods and other such kludges.

## Update for V0.2.0

- Reworked the protocol of the .fmt methods and renamed them to format.
- Added the Mutex class.
- Added the Time class.

## Update for V0.2.1

A minor update with a fix to method mapping, documentation upgrades and new Procedure methods call\_v, call\_x, and call\_vx.

## **Update for V0.3.0**

- Added the Duration class, a whole host of methods and documentation.
- Changed the Time class to return Duration objects when computing the span of two Time objects.
- The conventional format operation for all objects now has proper error handling added to catch malformed format strings.
- Minor assorted User Guide updates.
- Documented most of the System Call error types.

## **Update for V0.4.0**

- Arrays: Added the scatter/gather methods. Deprecated join/split methods. Allow any object to be inserted with the .+left/mid/midl/right methods. Firmed up the exclusions on negative sizes and widths.
- Refactored the fOOrth native error codes.
- Redesigned exception handling to handle errors in a more consistent manner.
- Implemented sub-project “stack\_integrity”. This aims to ensure that, in the event of an error, most (if not all) operations, leave the stack in a “clean” state making error the recovery process much simpler.

## Installation

### **Ruby**

The fOOrth system is written in Ruby, so, at this time, the first step in installing fOOrth is to install Ruby. The question that then arises is what version of Ruby is required? To date, fOOrth has been tested under:

- ruby 1.9.3p484 (2013-11-22) [i386-mingw32]
- ruby 2.1.5p273 (2014-11-13 revision 48405) [i386-mingw32]<sup>13</sup>
- ruby 2.1.6p336 (2015-04-13 revision 50298) [i386-mingw32]
- Rubinius – to be tested!
- JRuby – to be tested too!

Given the versions that I know work, I am hopeful the 2.0.x and 2.2.x will likely work too. I can state with a great deal of confidence that fOOrth will NOT work with any MRI 1.8.x or older and 1.9.1 and 1.9.2 are very doubtful as well, but the confidence there is a lot less.

Installing Ruby is beyond the scope of this documentation, but some excellent references to assist in this endeavor are:

<http://www.railsinstaller.org/en>

Yes, this installer does install the Ruby and the Rails web framework, but includes comprehensive support for gem, git, devkit, rake, rdoc and other tools and is the easiest, most comprehensive choice for Windows or Mac (pre OSX Mavericks) users.

<http://rubyinstaller.org/>

Please note: Some changes in security may cause difficulty, so this work around may be helpful: <https://gist.github.com/luislavena/f064211759ee0f806c88> or simply google the phrase “Workaround RubyGems’ SSL errors”

Another comprehensive Ruby installation site for Windows and useful extensions not included above is:

<https://www.ruby-lang.org/en/documentation/installation/>

A comprehensive source for installing or even compiling Ruby on all platforms. This is also a hub of information on what is available in the world of Ruby.

Of course, fOOrth is built on Ruby, so it makes sense to understand the underlying foundation. For this this web site is invaluable: <https://www.ruby-lang.org/en/>.

---

<sup>13</sup> Ruby 2.1.5 has serious code defects that are only resolved in 2.1.6. It is advised that the latter be used.

## **fOOrth**

The fOOrth language is delivered in the form of a Ruby gem<sup>14</sup>. An easy-to-use package that delivers code with version management facilities. This gem is hosted on the web site Ruby Gems<sup>15</sup>. Once Ruby is installed, installing fOOrth is as simple as the following command:

```
gem install fOOrth
```

That's it! It should be that simple!

## **Installing from GitHub**

GitHub<sup>16</sup> is the world's social network for programmers and above all, the code they create. With a GitHub membership (available for free), you get to rub shoulders with giants like Google<sup>17</sup> and Facebook<sup>18</sup>. To install fOOrth from its GitHub repository, some prerequisites must be met:

1. Git must be installed and working.
2. Ruby must be installed and working.

All of these requirements are met if you install via the RailsInstaller.org link above but there are numerous other ways to get these steps done. Otherwise, install Ruby (see above) and Git (<https://git-scm.com/>) from your favored sources.

Once the prerequisites are out of the way simply navigate you favorite web browser to:

<https://github.com/PeterCamilleri/fOOrth>

and click on the handy “Clone in Desktop” button and follow the instructions.

## **Contributing**

Contributions to the fOOrth project should be made via GitHub. A summary of the recommended procedure for doing so follows:

1. Fork it
2. Switch to the development branch ('git checkout development')
3. Create your feature branch ('git checkout -b my-new-feature')
4. Do amazing things! Don't forget to write lots of tests!
5. Commit your changes ('git commit -am “Add some feature”')
6. Push to the branch ('git push origin my-new-feature')
7. Create a new Pull Request

---

14 This is not true. Until a reasonably stable code base exists the gem will not be available to avoid wasting a lot of repository space. Until then, the only way to get fOOrth is from github. See the source archive section below.

15 Ruby Gems is located at <http://rubygems.org/>

16 For a better introduction to GitHub please see: <http://readwrite.com/2013/09/30/understanding-github-a-journey-for-beginners-part-1> or <http://www.geekgumbo.com/2012/02/13/cloning-software-from-github/>

17 Please see: <https://github.com/google>

18 Please see: <https://github.com/facebook>

It is strongly encouraged to apply all new coding efforts to the development (or a feature) branch and not master.

## **Plan B**

Go to the GitHub repository and raise an issue calling attention to some aspect that could use some TLC or a suggestion or an idea. Apply labels to the issue that match the point you are trying to make. Then follow your issue and keep up-to-date as it is worked on. All input are greatly appreciated.

## ***Running fOOrth***

Once fOOrth is installed, there are several options for running the language environment. These are:

### **Rake:**

From the base folder of the gem (where the file rakefile.rb is located) simply enter the following from the command prompt:

```
rake run
```

This will then run up an interactive, command line session in fOOrth.

### **Demo.rb:**

In the base folder of the gem there is a file demo.rb. If the fOOrth gem has been installed on the local system, this can be copied to any convenient folder and run with:

```
ruby demo.rb
```

This will also run up an interactive, command line session in fOOrth. This method has the advantage of being a little quicker.

## ***Testing***

No code is well written that does not include a comprehensive set of tests and fOOrth is no exception. The tests in fOOrth are divided into two main sections: the unit tests which focus on testing the underlying Ruby support code and integration testing which takes a more wholistic approach and largely tests fOOrth with fOOrth code. To run these unit and integration tests, respectively, use the following commands:

```
rake test  
rake integration
```

## **Known Issues**

When testing under MRI Ruby 2.1.5, there is a known issue with the integration test suite. In particular, if the internal rake command that launches the test exceeds 1022 characters, the test will hang with no error. The only way to abort this error is to interrupt the test, typically by hitting a control-C character.

As a work-around, the names of the integration test files have been given a bit of a trim (the word library was shortened to lib) in order to limbo dance under the 1022 character limitation.

In the long run, there seems to be no fix for version 2.1.5 available. It may be that a switch to version 2.1.6 may be required to correct this issue properly<sup>19</sup>.

## **Source Archive**

The source code archive for fOOrth may currently be found on the github repository at the address: <https://github.com/PeterCamilleri/fOOrth>. See Appendix C – GIT for more details on the use of branching within the project.

---

<sup>19</sup> Development is currently proceeding with Ruby 2.1.6.



## First Steps

The fOOrth system can operate in a number of ways, but the classic mode is as an interactive programming environment. In this interactive system, the user enters commands in a text session. These are executed and any results appear as output to the screen. For example:

```
>4 5 + .  
9  
>
```

The “>” is a command prompt, the code entered was “4 5 + .” and the output was “9”. Drilling down a little deeper, fOOrth uses postfix notation, sometimes referred to as reverse polish notation<sup>20 21</sup>. In more conventional languages, infix or algebraic notation is used. To add 4 and 5 we would write 4 + 5. The addition operator being infix or between the operands. In postfix notation, the operands come first and the operator follows or is postfixed. Thus “4 5 +”.

Now infix algebra requires all sorts of complex operator precedence rules as well as parenthesis to override those precedence rules. Postfix notation needs no such complexity. Postfix notation is well supported by a simple stack<sup>22</sup> data structure and this is built into fOOrth in the form of its data stack.

Consider the example code in greater detail yet:

Tokens	<b>4</b>	<b>5</b>	<b>+</b>	<b>.</b>
Output				'9'
Data Stack	4	5	9	
		4		

Expressions that require parenthesis in infix notation, are written without them in postfix notation. Consider the following expressions:

Infix	Postfix	Result
2+3*4	2 3 4 * +	14
(2+3)*4	2 3 + 4 *	20

Note how the postfix version is simply read from left to right without having to jump about the expression and apply complex rules. So far, at this level, fOOrth appears to be identical to

<sup>20</sup> [http://en.wikipedia.org/wiki/Reverse\\_Polish\\_notation](http://en.wikipedia.org/wiki/Reverse_Polish_notation)

<sup>21</sup> The reason it is called Reverse Polish Notation (RPN) is that it is the reverse of the prefix notation created by Polish logician Jan Łukasiewicz (see [http://en.wikipedia.org/wiki/Jan\\_%C5%81ukasiewicz](http://en.wikipedia.org/wiki/Jan_%C5%81ukasiewicz)), whose name is utterly unpronounceable by non-Polish speakers. I know. I tried. Even with Polish coaching, I never got it right.

<sup>22</sup> [http://en.wikipedia.org/wiki/Stack\\_\(abstract\\_data\\_type\)](http://en.wikipedia.org/wiki/Stack_(abstract_data_type))

FORTH. However this is not the case. To understand how this is so, consider the original addition of 4 and 5 at a deeper (but still abstract) level, contrasting the actions of fOOrth with a hypothetical FORTH implementation.

Language Tokens	Abstract Pseudo-Code Generated	
	FORTH	fOOrth
4	Push_integer 4	Push_integer 4
5	Push_integer 5	Push_integer 5
+	T <sub>1</sub> = Pop_integer T <sub>2</sub> = Pop_integer T <sub>3</sub> = Add_integers T <sub>2</sub> , T <sub>1</sub> Push_integer T <sub>3</sub>	T <sub>1</sub> = Pop_object T <sub>2</sub> = Pop_object T <sub>3</sub> = T <sub>2</sub> .Add(T <sub>1</sub> ) Push_object T <sub>3</sub>
.	T <sub>1</sub> = Pop_integer Print_integer T <sub>1</sub>	T <sub>1</sub> = Pop_object T <sub>1</sub> .Print_object

In FORTH, the + operator is hardwired as the integer addition operator. In fOOrth, the + operator is a message sent to a data item (or object) on the stack. The implementation of that operator is determined by how that object is programmed to respond to that message.

When incorrect data are sent to the FORTH “+” or the “.” words, they blindly proceed without regard for the incorrect results generated. FORTH has little to no error checking and usually handles errors by hanging or crashing. In fOOrth, each message that is sent, must be understood by its receiver. Errors are reported as soon as they occur.

## The Syntax and Style of fOOrth

### **Syntax**

In most programming languages most of the outline of the code and its major control structures is a function of the syntax enforced by the parser. In languages like Smalltalk, FORTH, and fOOrth this is not the case. The parser only supports the barest essentials required to create expressions, the rest is a consequence of the actions taken by those expressions. In FORTH, the only constructs recognized by the parser are code “words” and numeric literals. In fOOrth, a bit more is done with the parser supporting “words” (aka “methods”), numeric literals, string literals, and comments. Thus syntax plays a minor role in fOOrth. It is more semantic than syntactic in nature.

### **Spaces**

In general, fOOrth language tokens or words are separated by spaces. Other languages allow operators and punctuation to abut identifiers and literal values. In fOOrth this is generally not permitted. Thus

```
4 5 + .      // Correct, prints out 9
4 5+.        // Incorrect, produces the error F10: ?5+.? as in what's this?
```

In fOOrth, there are three exceptions to this rule: Comments, String literals and Numeric literals.

### **Comments**

The fOOrth language supports two types of comments. Embedded comments may be placed inline between other language elements as in this silly example of how not too add comments to your code:

```
4 (four) 5 (five) + (add) . (print)
```

Note that unlike FORTH, there is no need to place a space after the leading “(“ character. The other form of comment is lifted from C++ and is started a “//” and ends at the end of the line.

```
4 5 + .      // Prints out 9!
```

While this example has an extra space after the //, this is not required.

## ***String Literals***

In fOOrth special support is provided for embedded string literals. Any fOOrth method that ends with a " character is assumed to contain an embedded string. No space is required between the the " and the start of the string. The string ends with a matching trailing " character. Some examples of methods with embedded strings are:

```
. "Hello World" // Print Hello World
) "ls -al" // Shell out the command: ls -al
"ABCD" // The string literal "ABCD"
```

Further discussion of string literals is found in section String – String Literal below.

## ***Numeric Literals***

Many sorts of numeric literals require various sorts of punctuation as part of the number being specified. These are placed inline with no spaces as in these examples:

```
-10 99.1 -3.0E21 1/3 2+3i -2-2i
```

Further information on these literals is found in the sections “Complex”, “Float”, “Integer”, and “Rational”.

## ***Procedure Literals***

In fOOrth special support is provided for embedded procedure literals. Any fOOrth method that ends with a {{ character sequence is assumed to contain an embedded procedure or code fragment. A space *is* required between the the {{ and the start of the code in the procedure. The string ends with a matching trailing }} sequence. A space is needed there too, between the end of the code and the }}.

Some examples of methods with embedded procedures are:

```
{{ dup + }}
array_value .map{{ v dup * }}
"name" Outstream .append{{ ~"Hello" }}
```

## A fOOrth Calculator

Since fOOrth was in part inspired by the powerful RPN calculators manufactured by companies like Hewlett Packard, let's start delving deeper into fOOrth using its interactive mode as a kind of super-calculator.

### *The Basics*

To begin, run up fOOrth (see section Running fOOrth above). Lets see what comes up initially.

```
C:\Sites\fOOrth>rake run
Welcome to fOOrth: fO(bject)O(riented)rth.

fOOrth Reference Implementation Version: 0.0.3

Session began on: 2015-01-24 at 11:39am

>
```

The last line has a “>” which is a prompt for input. To facilitate this use of the language, we now enter the `)show` command.

```
> )show

[ ]
>
```

For clarity, user input is shown bold and underlined. This emphasis is for clarity in text only, and does not occur in the actual interactive session.

Also note the `[]` after the command. This is a data dump that will help us keep track of the contents of the stack. No data is shown between the brackets because at this time the data stack is empty. Lets dive right in and try some calculating:

```
> 4 5 6

[ 4 5 6 ]
> *

[ 4 30 ]
> +

[ 34 ]
> .
34
[ ]
```

In the above, the numbers 4 5 6 are entered to the stack, then 5 and 6 are multiplied, then 4 and 30 are added. Finally, the result, 34, is printed out to the screen (with the “.” dot command), leaving an empty stack once more.

Naturally, computations are not limited to integer values, but may include floating point, rational and even complex data. Some example computational sequences with these data types are show in the next screen capture sequence:

```

>4.0E3 50.0 6000.0
[ 4000.0 50.0 6000.0 ]
>*
[ 4000.0 300000.0 ]
>±
[ 304000.0 ]
>.
304000.0
[ ]
>1/2 2/3 4/5
[ 1/2 2/3 4/5 ]
>*
[ 1/2 8/15 ]
>±
[ 31/30 ]
>.
31/30
[ ]
>1+2i 3+4i 5+6i
[ 1+2i 3+4i 5+6i ]
>*
[ 1+2i -9+38i ]
>±
[ -8+40i ]
>.
-8+40i
[ ]
>

```

The fOOrth language supports many common math operations. In addition to the four basic operators (add +, subtract -, multiply \*, and divide /) there are (remainder mod, exponentiation \*\*) as well as trigonometric, logarithmic and other operators too numerous to mention. Most will be found in the class reference section for the Numeric class.

## ***Stack Manipulation***

All RPN calculators (and even most non-RPN ones) include a number of operations for manipulating the stack. In fOOrth, these operations are pretty much lifted verbatim from FORTH. These operations are performed directly by the Virtual Machine, again, just like FORTH would have done. Here are some brief examples of the most common sorts of operations plus a look at them in action interactively:

drop – discard the top element of the stack.

```
>1 2 3  
[ 1 2 3 ]  
>drop  
[ 1 2 ]
```

dup – duplicate the top reference or value. Note that any referenced data is NOT duplicated. See the section Cloning Around for further details.

```
>"apple"  
[ "apple" ]  
>dup  
[ "apple" "apple" ]
```

nip – grab the second element of the stack and discard it.

```
>1 99 2  
[1, 99, 2]  
>nip  
[1, 2]
```

over – grab the second element of the stack and push a duplicate of it to the top of the stack.

```
>"apple" "pie"  
[ "apple" "pie" ]  
>over  
[ "apple" "pie" "apple" ]
```

pick – pick the stack element indexed by the top stack element and make a duplicate of that the new top element of the stack.

```
>1 2 3 4  
[ 1 2 3 4 ]  
>2 pick  
[ 1 2 3 4 3 ]
```

swap – exchange the top two elements of the stack. Just like the old x↔y calculator key

```
>1 2  
[ 1 2 ]  
>swap  
[ 2 1 ]
```

tuck – take the top element of the stack and tuck a duplicate of it under the second element.

```
>1 2
[ 1 2 ]
>tuck
[ 2 1 2 ]
```

## The Return Stack

The astute reader and scholar of FORTH will note the absence of the FORTH return stack. Quite simply, the return stack is not necessary in fOOrth and would serve little purpose. Early versions of fOOrth did indeed have such a stack, but it has been a long time since it was utilized in anyway. In classical FORTH, the return stack serves three purposes:

1. To store return addresses for word calls. In fOOrth this is handled by the Ruby virtual machine.
2. To store context for control structures. In fOOrth the context mechanism provides for a far richer and more reliable set of control, compile, and data structures.
3. As an escape valve when the stack has become too crowded and an need to put data “someplace” brings the return stack into service. In fOOrth local and instance variables provide a much more flexible and less error prone alternative. In addition, the object oriented concept of “self” often allows for a great deal of code simplification.

## Programming

The very best calculators not only excelled at computations, they also allowed actions to chained together and stored. They were programmable. This feature greatly extends the reach of these devices. The fOOrth language calculator is eminently programmable.

Let us start with the simplest form of programming, the creation of virtual machine methods. This closely corresponds to the creation of “words” in FORTH. As an example lets us create a very simple method called double that doubles a value. The transcript follows:

```
>: double dup + ;
[ ]
>4 double .
8
[ ]
>"apple double ."
appleapple
[ ]
>
```

The colon is used to start a definition on the virtual machine. This is followed by the name of the method, in this case “double”. The body of the definition follows and finally the semi-colon closes off the definition. This is all classic FORTH code.



When we enter `4 double .` we get an answer of 8, just as expected. The differences to classic FORTH begin to show when we enter the `"apple" double .` command. Instead of an error or some crazy number, or a crash, we get the string "appleapple". The double method "doubled up" the string.

This is a result of the fact the the + operator in the double method is not hardwired to integer addition as it would be in FORTH, but is sent to the receiver where it is processed according to the rules of that receiver. For an integer, that is integer addition. For a string that is string addition, usually called concatenation.

## Control Structures

Now recording programming steps is all well and good, but any decent calculator also has the ability to make decisions and perform repetitive tasks, and fOOrth does not disappoint!

### The if statement:

While a calculator might have settled for a conditional "goto" statement, fOOrth has a fully structured "if" statement. It is in RPN however so the Boolean expression comes before the "if" operator as in this example:

```
>: is_five 5 = if ."It is five!" else ."Nope, it is not five" then ;  
  
>4 is_five  
Nope, it is not five  
>5 is_five  
It is five!
```

In this example, a method called `is_five` is created that takes different actions based on a test of the input argument. The "if" statement defines two local methods, "else" and "then". A more formal look at the "if" statement is:

```
<boolean expression> if <>true clause> {else <>false clause>} then
```

Where the { } indicate an optional component.

### The switch statement

Now, fOOrth, FORTH and Smalltalk share a shortcoming. They all have difficulty dealing with chained if then elsif elsif end situations. They tend to cascade many levels of nesting inside the "else" clauses. For a real example of this the following code is presented. This `ugly_if`<sup>23</sup> code uses nested "if" statements to select from three choices with a default.

```
// ugly_if.foorth - ugly nested if statements  
: choose_path  
  dup 1 = if  
    drop ."path 1"  
  else  
    dup 2 = if  
      drop ."path 2"
```

---

<sup>23</sup> The file is `ugly_if.foorth` which may be found in the docs/sippets folder.

```

else
  dup 3 = if
    drop ."path 3"
  else
    drop ."Invalid path selected"
  then
then
then
then
cr ;

```

Note the “creeping” indenting of the code, a reflection of the nesting of the control structures. To alleviate this problem fOOrth has the switch construct. Consider instead, the following snippet<sup>24</sup> of code:

```

// switch.fooorth -- switch statement sample
: choose_path
  switch
    dup 1 = if drop ."path 1" break then
    dup 2 = if drop ."path 2" break then
    dup 3 = if drop ."path 3" break then
    drop ."Invalid path selected"
  end cr ;

```

The purpose of the switch ... end control structure is to group together a number of statements. In addition to the “end” keyword, the switch clause defines the “break” verb. The purpose of the break (and its related ?break) verb is to skip past any remaining statements to the just past the “end”.

When run (both versions produce the same output, but switch.fooorth is shown in this example) we see:

```

> load"docs/snippets/switch.fooorth"
Loading file: docs/snippets/switch.fooorth
Completed in 0.0 seconds

> 1 choose_path
path 1

> 2 choose_path
path 2

> 42 choose_path
Invalid path selected

```

## The do statement

Another major feature of a good programmable calculator is the ability to automate repetitive operations. In fOOrth, the “do” statement borrows heavily from FORTH, but there are some crucial differences. A classic snippet of code might look like this:

```

> 0 10 do i . space loop
0 1 2 3 4 5 6 7 8 9

```

---

<sup>24</sup> The file is switch.fooorth which may be found in the docs/sippets folder.

This prints out the numbers from 1 through 9 to the terminal session. The “do” and “loop” commands mark the boundaries of the loop; The “i” command is used to retrieve the current loop counter value. For nested loops, the “j” command retrieves the value of the outer loops counter value. By default, the “loop” command adds one to the loop value. For more flexible looping, the “+loop” command allows an arbitrary increment value to be specified.

So far, fOOrth “do” loops are just like FORTH. However, a significant difference between fOOrth and FORTH is how the end condition is determined. In FORTH, the loop terminates when the current loop value is exactly equal to the end value. In fOOrth, the condition is tripped when the current loop value is greater than or equal to the end value. An example of this in action is the following broken code:

```
>10 0 do i . space loop
```

In fOOrth, this code does nothing because the end condition is met at the start of the loop. In FORTH it goes looping off crazily until the loop counter overflows and counts up to zero. That can be a very long time indeed and is as close to an infinite loop as does not matter.

### ***-i and -j***

In solving one problem, often a new problem is created, and this is no exception. The astute reader will be wondering how a loop would be constructed that counts *backwards*! The broken code above does nothing and so does the classical way of reverse counting in FORTH:

```
>10 0 do i . space -1 +loop
```

To resolve this issue, fOOrth provides reverse counter versions of the loop variables. The reverse counter for “i” is “-i” and the reverse counter for “j” is “-j”. Thus the fOOrth version of this code is simply:

```
>0 10 do -i . space loop  
9 8 7 6 5 4 3 2 1 0
```

Now both the forward and reverse loop variables are available so it is possible to process *both* directions at once in a single loop. For example:

```
>0 10 do i -i * . space loop  
0 8 14 18 20 20 18 14 8 0
```

A simple example of looping in action can be seen in the times\_table<sup>25</sup> example file. Here is the source code:

---

<sup>25</sup> The file is times\_table.forth which may be found in the docs/sippets folder.

```
// Print out a classic times table.

cr
." * |" 1 13 do i f"%3d " . loop cr
."-----+" "-" 47 * . cr

1 13 do
  i f"%2d |" .

  1 13 do
    i j * f"%3d " .
  loop

  cr
loop
cr
```

Most of this code is devoted to making the output look nice, but the core of the code are the nested do loops both counting from 1 to 12. As can be seen, the inner loop counter is accessed via the “i” method and the outer counter is accessed via the “j” method. And here is the output!

```
>)load"docs/snippets/times_table"
Loading file: docs/snippets/times_table.forth

* | 1 2 3 4 5 6 7 8 9 10 11 12
-----+-----
1 | 1 2 3 4 5 6 7 8 9 10 11 12
2 | 2 4 6 8 10 12 14 16 18 20 22 24
3 | 3 6 9 12 15 18 21 24 27 30 33 36
4 | 4 8 12 16 20 24 28 32 36 40 44 48
5 | 5 10 15 20 25 30 35 40 45 50 55 60
6 | 6 12 18 24 30 36 42 48 54 60 66 72
7 | 7 14 21 28 35 42 49 56 63 70 77 84
8 | 8 16 24 32 40 48 56 64 72 80 88 96
9 | 9 18 27 36 45 54 63 72 81 90 99 108
10 | 10 20 30 40 50 60 70 80 90 100 110 120
11 | 11 22 33 44 55 66 77 88 99 110 121 132
12 | 12 24 36 48 60 72 84 96 108 120 132 144

Completed in 0.21 seconds
```

Now we're all ready for those math tests!

## The begin statement

The “do” loop is great for cases where the iteration action is based on counting. For loops *not* based on counting there is the “begin” statement. The “begin” keyword is balanced against one of the following locally defined terminating keywords:

- begin ... until – loops until the top of stack is true.
- begin ... again – loops indefinitely
- begin ... repeat – same as above.

Now it will be noticed that two of the configurations loop indefinitely. This is not desirable, so to handle this case the “while” verb exists. The “while” method exits the loop if the top of stack is false. A begin ... {until/again/repeat} loop may have multiple while sub-clauses.

A simple (simplistic) example of this type of loop in action is seen in the `int_log226` snippet:

```
// A simple integer log2
: ilog2 .to_i 2/ 0 swap
  begin
    dup 0> while
      2/ swap 1+ swap
    again
  drop ;
```

A sample run is shown below:

```
> load"docs/snippets/int_log2"
Loading file: docs/snippets/int_log2.foorth
Completed in 0.005 seconds

> 8 ilog2 .
3
> 18 ilog2 .
4
> 0 ilog2 .
0
> 1 ilog2 .
0
> 3 ilog2 .
1
> 4 ilog2 .
2
```

## Data Memory

Even the most rudimentary calculators are equipped with some data storage, even if it is the primitive STO, RCL, M+, M-, and MCLR. In real programming systems, data storage is rather more complex, more than can fit into this already too long section. In fOOrth, considerable flexibility exists in the use of data memory. The following section examine this topic in several categories.

---

<sup>26</sup> The file is `int_log2.foorth` which may be found in the `docs/snippets` folder.



## Data Storage in fOOrth

### Typing

While the data itself is strongly typed in fOOrth, the data storage (variables etc) are not. Data of any sort may be placed into a variable. This closely reflects how Ruby does things. FORTH in contrast is a completely type less language with no type checking at any point or on any level.

All of this begs the question though: What is a data type? In fOOrth, data types are compatible if they respond to the required set of messages and produces the expected results. This is covered in more detail later, but for now we can simply say that the type of a datum is determined by the operations it supports. This is often called Duck Typing<sup>27</sup>. Again, fOOrth borrows heavily from Ruby.

### Declarations

In Ruby, there are no formal declarations of variables. There are times when the extreme flexibility of Ruby forces the programmer to write a preemptive assignment statement to force the language to do the right thing, but there are no variable declarations<sup>28</sup>. In fOOrth, variables are always declared and they are always given an initial value. The general form of one of these declarations is:

```
<value> <defining_word:> <variable_name>
```

The details of this declaration are filled in by the following sections.

### Scoping

In all programming languages, variables have a life span, or scope of existence. The fOOrth language supports four scoping options. These are described below:

#### Local Scope

The local scoping option allows variables to exist locally within a single method. Typically, local variables are created near the beginning of the method, their initial values may be literals, computed values or may be taken from arguments to the the method.

Methods: `val:` and `var:`

Regex for valid local variable names: `/^[a-z][a-z0-9_]*$/29`

Notes: Local variables are only accessible inside the methods they are defined in, after the point in the code where they are defined.

---

<sup>27</sup> From the adage: If it quacks like a duck, swims like a duck, and waddles like a duck... it's a duck!

<sup>28</sup> Many think that the `attr_reader`, `attr_writer`, and `attr_accessor` macros of Ruby are variable declarations, but they are not. They simply define access methods for a variable, not the variable itself.

<sup>29</sup> See Appendix B for more information on Regular Expressions.

## Instance Scope

Instance scoped variables are associated with instances of objects. As such, these methods are only accessible inside methods of those objects. Instance variables are distinguished by the leading “@” sign in their names. Instance variables can only be created in such methods as well, with the `.init` method being the most popular since it is called to initialize a new instance of the object.

Methods: `val@:` and `var@:`

Regex for valid local variable names: `/^@[a-z][a-z0-9_]*$/`

Notes: Instance values/variables are only accessible in environments where the “self” entity is the object where they exist. This is the case of a method or a `where{...}` clause of that object.

## Thread Scope

Thread variables are associated with the thread in which they are defined. As such they are accessible anywhere within that thread. Thread variables are distinguished by the leading “#” sign in their names. Thread variables may be created at any point within the thread.

Methods: `val#:` and `var#:`

Regex for valid local variable names: `/^#[a-z][a-z0-9_]*$/`

Notes: When a new thread is created, it receives a copy of the thread variables in the thread that created it.

## Global Scope

Global variables may be accessed at any point after they have been defined. Global variables are distinguished by the leading “\$” sign in their names.

Methods: `val$:` and `var$:`

Regex for valid local variable names: `/^\$[a-z][a-z0-9_]*$/`

Notes: Global variables are considered bad in many circles.

## Referencing

This one is a bit tricky. Most programming languages have the concept of the value *of* a variable and a reference *to* a variable. In “C”, documentation speaks of “lvalues” and “rvalues”. These labels describe the role (left and right value) played in the classic “C” assignment statement:

```
<lvalue> = <rvalue>;
```

In “C” there is the further concept of being able to create a reference to a variable using the “&” operator. This operator allows the programmer to create a reference (via a pointer) to a the variable in question.

Ruby on the other hand has no explicit support for references. Variables themselves are always



values and there exists no way to generate a reference to a variable. It is true that the Ruby interpreter must have access to a reference to a variable in order to perform an assignment, but this capability is kept locked up in the internals of the language.

In fOOrth, the ability to use references and values is explicitly available to the programmer through the “var” and “val” keyword roots<sup>30</sup>. To create a variable that holds a reference, use:

```
<value> var: <var_name>
```

For example:

```
0 var: score
```

To create a value simply substitute the var: version as in this example:

```
10 val: max_score
```

The first example creates a variable “score” that is a reference to the value, currently 0. The second creates a variable “max\_score” with a value of 10. Next we examine how referencing affects the code that is needed to use these variables:

Task	<i>var</i>	<i>val</i>
Sample Declarations	0 var: score	10 val: max_score
Just what is being declared?	A method (called score) that pushes a reference to the value (0) onto the stack.	A method (called max_score) that pushes the value (10) onto the stack.
Retrieve the value of the variable.	score @	max_score
Update the value of the variable.	1 score !	-- <sup>31</sup>
Get a reference to the variable.	score	-- <sup>32</sup>

As can be seen in the above table, var scope is more capable than val scope. It is also slower, more complex, and more verbose. For most uses, the greater capabilities of the var scope are not required. Thus it is expected that for most applications val scope will be the predominant form utilized.

In most programming languages, including Ruby, val or value variables are called constants. In Ruby, this title is a falsehood due to the issue of data mutation, covered in the next section.

## **Mutation**

In motion pictures, mutants are sometimes the good “guys”, but regardless of that, wherever mutations are involved, trouble always seems to follow them. That also holds true for fOOrth

<sup>30</sup> For simplicity, the examples here assume local scope, but the examples would work in the same manner with global, thread, or instance scoping.

<sup>31</sup> This operation is not available for value variables.

<sup>32</sup> This operation is also not available for value variables.

and the underlying Ruby base language. In fOOrth, all datum are divided into two major classifications: Immutable and Mutable. Simply put, immutable values are those that retain their value when operations are applied to them. Mutable values do not have this property. In fOOrth, numbers (of all sorts), boolean values (true and false) and the special value nil, are all immutable. Everything else *is* mutable. It is noteworthy that character strings in particular fall into the mutable camp.

For comparison, consider this first example with immutable data:

```
>5 val$: $iv $iv .
5
>$iv 6 + .
11
>$iv .
5
>
```

In this example, a value of 5 is created. An addition operation with 6 is performed, yielding 11. Nonetheless, the original value of 5 is NOT mutated by this operation. Now consider a similar scenario with mutable data:

```
>"Hello" val$: $mv $mv .
Hello
>$mv " World" << .
Hello World
>$mv .
Hello World
```

In this case, the string variable IS mutated by the concatenation "<<", operator. If one were relying on the \$mv value to be constant, this would be a severe setback. Now to be clear, there is a non-mutating concatenation operator, "+". As shown below, it does NOT mutate the string:

```
>"Hello" val$: $mv $mv .
Hello
>$mv " World" + .
Hello World
>$mv .
Hello
>
```

So why have both? Why not always avoid the mutation? Simply put, the non-mutating version is slower because it must create a copy of the string to avoid modifying the original. There is a trade-off between mutation and efficiency. With immutable data, there is no need for trade-offs or two versions of operations. Operations on immutable data are always immutable AND efficient!

The fOOrth language does provide ways to explicitly control or at least work around mutation issues. This is discussed in the next section on Cloning Data.

## Cloning Data

Since some data in fOOrth are mutable, it is sometimes necessary to create copies of that data so that operations can be performed that do not corrupt the “original” data. The fOOrth language system has a number of data duplication methods that meet various needs. These methods are summarized below:

Method	Stack Before	Stack After	Description	Time Used	Copy Depth
dup	x	x x	Duplicate the data without any copying.	Least	None
copy	x	x x'	Duplicate the data with a shallow copy.	Moderate	One Level
.copy	x	x'	Replace the data with a shallow copy.		
clone	x	x x''	Duplicate the data with a deep copy.	Most	All Levels
.clone	x	x''	Replace the data with a deep copy.		

### Deep vs Shallow Copy

To examine the differences in the copying strategies, consider the following three different scenarios:

1. No Copying
2. Shallow Copying
3. Deep Copying

### No Copying

In the following example session, the first line creates a value, “\$expo” with an array as value. The first element of the array is the string “Expo” and the second element is the number 67. To show this, the value is printed out. The second statement creates a value “\$ecopy” with the same value as “\$expo”. The next two statements<sup>33</sup> change the 67 to a 99 and append the string “sure” to the string “Expo”. The final two statements display “\$ecopy” (the copy) and “\$expo” (the original).

```
>[ "Expo" 67 ] val$: $expo $expo .  
[ "Expo" 67 ]  
>$expo val$: $ecopy $ecopy .  
[ "Expo" 67 ]  
>99 1 $ecopy .[]!  
  
>0 $ecopy .[]@ "sure" <<  
  
>$ecopy .
```

<sup>33</sup> For more information on array access words, please see the Array section below.

```
[ "Exposure" 99 ]
>$expo .
[ "Exposure" 99 ]
```

As can be seen, both have been modified in the same way because the two values (“\$expo” and “\$ecopy”) both reference the same mutable array.

## Shallow Copying

This session is the same as the previous except that the “.copy” method is applied to the value before it is used to create “\$ecopy”. The “.copy” creates a copy of the array but not the data elements in that array.

```
>[ "Expo" 67 ] val$: $expo $expo .
[ "Expo" 67 ]
>$expo .copy val$: $ecopy $ecopy .
[ "Expo" 67 ]
>99 1 $ecopy .[]!

>0 $ecopy .[]@ "sure" <<

>$ecopy .
[ "Exposure" 99 ]
>$expo .
[ "Exposure" 67 ]
```

As can be seen, the results are mixed. Since a copy of the array was made, the number 67 is not changed in the original. The string, “Expo” however is still mutated to “Exposure” since no copy of it was made. Of course we could have used the non-mutating version of string concatenation. This would have resulted in the following, somewhat longer code:

```
>0 $ecopy .[]@ "sure" + 0 $ecopy .[]!
```

Since the string is not being mutated, but instead, a new string is being created, it is necessary to store this new string back into the array explicitly.

In this new statement, the “0 \$ecopy .[]@” retrieves the existing string, the “"sure" +” performs the non-mutating concatenation, and the “0 \$ecopy .[]!” stores the string value just computed back into the array.

Note: For simple mutable data like strings, this shallow copy is fully sufficient to protect against any unwanted data mutation. However, for more complex data with multiple levels of information (like arrays, hashes, or user defined classes) a more thorough copying method is needed.

## Deep Copying

In the final example session, the “.copy” is replaced with “.clone”. This performs a deep copy that copies the array and its contents (and any of the contents' contents etc, etc...<sup>34</sup>).

```
>[ "Expo" 67 ] val$: $expo $expo .
```

---

34 From “The King and I”, please see [http://en.wikipedia.org/wiki/The\\_King\\_and\\_I](http://en.wikipedia.org/wiki/The_King_and_I)

```

[ "Expo" 67 ]
>$expo .clone val$: $ecopy $ecopy .
[ "Expo" 67 ]
>99 1 $ecopy .[!]

>0 $ecopy .[!@ "sure" <<

>$ecopy .
[ "Exposure" 99 ]
>$expo .
[ "Expo" 67 ]

```

As can be seen, the original value “\$expo” is not modified in anyway by changes made to its clone in “\$ecopy”.

### ***Partial Copying***

The clone commands in fOOrth have allowance for the fact that it is not always desirable to copy all of the data members when a clone is made. This is handled with the “.clone\_exclude” method. Any object that defines this method is able to exclude certain data from the copying process.

If the “.clone\_exclude” is defined as a shared method for a class, then all instances of that class share the same exclusions. On the other hand if it is defined exclusively for a single object, only that object is affected.

The “.clone\_exclude” method returns an array of items to be excluded from the copying process. For most objects, these are the names of instance variables as strings. For arrays and hashes, these are the specific index values to be skipped over during the copying. Note that if the named variables or index values do not occur in the object being cloned, no action is taken. Some examples follow:

```

(Clone exclusions in a class.)
class: MyClass
MyClass .: .init "a" val@: @a "b" val@: @b ;
MyClass .: .clone_exclude [ "@b" ] ;

```

In the above, when instances of MyClass are cloned, the variable @a will also be cloned, while @b will not. The @b variable will be shared between the originals and the clones.

```

(Clone exclusions in an array.)
[ "apple" "banana" ] val$: $test_array
$test_array .: .clone_exclude [ 1 ] ;

```

In this case, when the array is cloned, the contents of the array except for location 1 will also be cloned. The contents of position 1 will be shared between the originals and the clones.

```

(Clones exclusions in a hash.)
{ 0 "apple" -> 1 "banana" -> } val$: $test_hash
test_hash .: .clone_exclude [ 1 ] ;

```

Again in this case, the contents of the hash except for the entry indexed by 1 will also be cloned. The contents of index 1 will be shared between the originals and the clones.

## ***Permissive Copying***

In Ruby, if an attempt is made to clone an immutable data item like a number, an error occurs. The justification for this uncharacteristic strictness are not at all clear, but it means that the clone operation must be applied with great care.

In fOOrth, this is not the case. When clone or copy are applied to immutable data, the data is returned without modification or error. The reasoning here is simple. The data in question are already immutable so nothing needs to be done. Doing nothing is *not* an invalid operation. So fOOrth does precisely that and the program continues without error.

## Handling Exceptions

Error handling is an essential, if unpopular, part of all programming tasks. This section focuses on the use of the exceptions mechanism to simplify and streamline error handling.

When exceptions are not employed, code must be written that detects an error and returns an “error code”. Further code must then be written to detect these error codes and either process them, or propagate them up the call chain until they can be handled at the appropriate level. In this approach, it is not uncommon for error handling code to be so voluminous that it obscures the “main” flow of the code.

Exceptions are an error handling mechanism designed to separate out error handling from error detection and to simplify code structures. When errors are detected, they can be “thrown”. No error codes need be returned. Exceptions are simply “caught” and processed at the appropriate level. The exception system handles the propagation of errors without the need to write additional code.

### *The Nature of Exceptions in fOOrth*

Exceptions is one area where fOOrth is very different than Ruby<sup>35</sup>. In Ruby, exceptions are objects that are part of an elaborate hierarchy of exception classes, one class for each type of exception. In fact, there are so many exception classes that the majority of classes in the Ruby environment are exception classes. In fOOrth exceptions are simply messages sent from the error detector to the error processor. These messages take the form of a string with a leading part that is structured and a trailing part that is free form and hopefully descriptive.

Consider a typical exception message in fOOrth:

```
E15: divided by 0
```

The two components of this message are clearly visible. The structured section consists of “E15:” and identifies the exception. The unstructured section “divided by 0” describes the nature of the exception. The use of these sections is examined further under the topic “Determining the Type of Error”, below.

### *Handling Errors*

Consider the following three methods<sup>36</sup> that display  $50/(n-5)$  for values of  $n$  from 0 to 9:

```
(Exceptions in action)
(Phase One - Living Dangerously)
: danger
  0 10 do
    50 i 5 - / . space
  loop ;
```

---

<sup>35</sup> Even so, fOOrth exceptions are implemented using the Ruby exception mechanisms.

<sup>36</sup> These examples are in the file `exception.forth` in the `docs/snippets` folder.

```
(Phase Two - Living Tediously)
: tedium
0 10 do
  50 i 5 -
  dup 0<> if
    / . space
  else
    drop drop ."oops "
  then
loop ;
```

```
(Phase Three - Living Exceptionally)
: safety
0 10 do
  try
    50 i 5 - / . space
  catch
    ."oops "
  end
loop ;
```

The first method called “danger” ignores errors totally<sup>37</sup>. It just runs without a care because, surely, what could possibly go wrong? The second method called “tedium”, adds some extra code to detect a possible error condition (like division by zero) and print out a helpful message, “oops”. The last method called “safety” contains the potentially dangerous code in a “try” clause. If any error should be detected, the “catch” clause is executed which also prints out the vitally important “oops” message.

Let's see what happens when we try out these three methods...

```
>danger
-10 -13 -17 -25 -50
E15: divided by 0
>tedium
-10 -13 -17 -25 -50 oops 50 25 16 12
>safety
-10 -13 -17 -25 -50 oops 50 25 16 12
>
```

The living dangerously (danger) code bombs out with an error. Not good. The results from the tedious (tedium) and exceptional (safety) code are the same. The difference is that the exceptional code is clearer and more concise and the tedious code is well... tedious.

## The basic try block

The bare basics of an exception handled code block is:

```
try (dangerous code here) catch (error recovery code here) end
```

Note that the dangerous code may include nested method calls, control structures, etc.

<sup>37</sup> Well it's more complex than that. It is more accurate to say that when exceptions occur and no handler is found, the default exception handler is executed which takes safe, default actions that may or may not be desirable to the correct operation of the program that had the error.



Furthermore these entities must be complete. You cannot have part of a loop or conditional statement. That would generate an error at compile time.

## Determining the kind of error

In fOOrth, the catch clause catches all errors<sup>38</sup>. Often, different corrective action is required depending on the type of error. To determine the type of error, fOOrth uses the error code prefix. This prefix is a string consists of a leading upper-case letter, followed by a two digit code, optional followed by a comma and a sub-code, finally ending with a colon (":").

The defined error codes are specified below in the sections: fOOrth Native Exception Codes, Application Error Codes, and Ruby Mapped Exception Codes.

To facilitate the checking of error codes in the catch clause, the local method "?" is used. This method has an embedded string that is matched against the current error to see if there is a match. Consider the case of the divide by zero error from the previous examples. The following statements will all test for this error:

```
(stuff omitted) catch ?"E" if (action) then
(stuff omitted) catch ?"E1" if (action) then
(stuff omitted) catch ?"E15" if (action) then
(stuff omitted) catch ?"E15:" if (action) then
```

Whereas the following would NOT process that error:

```
(stuff omitted) catch ?"F" if (action) then
(stuff omitted) catch ?"E2" if (action) then
(stuff omitted) catch ?"E**" if (action) then
(stuff omitted) catch ?"E15,12" if (action) then
```

So far, the examples have focused on handling a single type of exception using an if statement. A more general approach utilizes the switch statement(see Control Structures, the switch statement above for more details). An example follows:

```
try
  (dangerous code)
catch
  switch
    ?"F30:" if (action 1) break then
    ?"E15:" if (action 2) break then
    bounce (See Passing the buck, below)
  end
end
```

## Passing the buck

Given that many types of exceptions exist, it will naturally occur that an exception handler will probably not handle all possible conditions. To deal with this situation, the "bounce" verb allows

---

<sup>38</sup> This is not actually true. There are some errors like "fatal" that are not caught because they are in effect not recoverable and catching these errors and trying to recover would lead to even worse problems. Other missed exceptions are simply gaps in the implementation and will eventually be handled correctly in a later version of the fOOrth language system.

an exception handler to relaunch or bounce the exception to the exception handler at the next higher level in the call chain. The last example in the previous section shows this in action.

The handler processes exceptions of type F30 and E15 itself. All other types of exceptions are bounced up the call chain.

## Tying Up Loose Ends

An important aspect of programming is the management of resources. A large part of that task involves freeing up, closing, deleting, or otherwise retiring objects used in by the program. While useful, exceptions can bypass this clean-up work. Avoiding this problem is the reason for the “finally” keyword.

In a try block, the finally section represents code that is performed after the dangerous code runs, regardless of the success of that code. The finally section always gets the last word. Consider this fourth<sup>39</sup> method in the exceptions<sup>40</sup> file:

```
(Phase Four - Cleaning Up After Yourself)
: cleanup
  "temp.txt" OutStream .create val: out_file
  ."File opened" cr

  try
    ."Danger comes next." cr
    1 0 / out_file .
    ."Danger has passed." cr
  finally
    out_file .close
    ."File closed" cr
  end ;
```

This method opens a file, tries to write the result of a dangerous calculation to it, and then, finally, closes the file. Along the way, the chatty code gives progress reports so that we can follow its progress in this perilous task. So, let's see what happens when this code is run.

```
>) load"docs/snippets/exception.foorth"
Loading file: docs/snippets/exception.foorth
Completed in 0.02 seconds

>cleanup
File opened
Danger comes next.
File closed

E15: divided by 0
```

The file is opened, upcoming danger is announced but never passed, and then the file is closed. We then see the default exception handler telling us what went wrong. The key here is that the file was closed even though an error was encountered.

---

<sup>39</sup> That's fourth and not FORTH.

<sup>40</sup> This example is in the file exception.foorth in the docs/snippets folder.

## Summary

The try block brings all the elements discussed in the previous sections as laid out below. Note that the order of sections is important. A catch section cannot follow a finally section.

```
try
  (dangerous code)
(optional) catch
  (exception handler with optional ?"Err Code" and bounce)
(optional) finally
  (cleanup code goes here)
end
```

The last example in our file<sup>41</sup>, shows all of these sections working together:

```
(Phase Five - All Together Now)
: last_example
  "temp.txt" OutStream .create val: out_file
  ."File opened" cr

  try
    ."Danger comes next." cr
    1 0 / out_file .
    ."Danger has passed." cr
  catch
    ."Error detected." cr
  finally
    out_file .close
    ."File closed" cr
  end ;
```

And here is the output for this code:

```
>last_example
File opened
Danger comes next.
Error detected.
File closed

>
```

Note how the error is caught (displaying “Error detected”) and then cleanup actions are performed (displaying “File closed”). Unlike the fourth<sup>42</sup> method, there is no uncaught exception and the default exception handler is not utilized. Instead the example exits “gracefully”.

---

41 This example is in the file exception.forth in the docs/snippets folder.

42 Still not the FORTH method.

## Generating Errors

So far our code has been responding to errors and handling them as needed. The question arises: What if we need to take on the role of whistle-blower<sup>43</sup> when we detect an error? In fOOrth, exceptions are messages sent from the detector to the handler. So, just as strings are caught to handle exceptions, they are thrown to generate them.

Consider the following security testing code<sup>44</sup>:

```
(Is the password secure?)
: test_password (password -- )
  "1234" = if
    throw"U10: Change the combination on my luggage!"
  then ;
```

When run we get:

```
> load"docs/snippets/throw.foorth"
Loading file: docs/snippets/throw.foorth
Completed in 0.01 seconds

> "1234" test_password

U10: Change the combination on my luggage!

> "secret" test_password

>
```

This code performs a check of the parameter password against the presidential standard of "1234" and throws an exception if there is a match, otherwise the code does nothing.

## Summary

It really is that simple. There are two "flavors" of the throw method:

```
"X99: Error Msg" .throw
throw"X99: Error Msg"
```

The first form is needed when the message string needs to be constructed or contains variable information. The second form is simpler and more succinct. However, both do the same basic thing; they send an exception string to the nearest active catch clause, or the default handler if there are no active catch clauses.

---

<sup>43</sup> Fortunately, this role is not nearly so perilous in fOOrth as it is when taking on the military-industrial oilgarchy.

<sup>44</sup> This example is in the file throw.foorth in the docs/snippets folder.

## **fOOrth Native Exception Codes:**

Exception codes generated within fOOrth all take the form “F99:” (an “F”, 2 digits, and a colon) followed by a descriptive message.

<b>Code</b>	<b>Description</b>
<b>F0</b>	Internal fOOrth system messages.
<b>F00</b>	A “)quit” command has been executed.
<b>F1</b>	Compile Time Errors.
<b>F10</b>	Syntax Error, unable to process input token.
<b>F11</b>	Syntax Error, missing specification for input token.
<b>F12</b>	Control Structure Nesting Error. A control structure was malformed.
<b>F13</b>	The compiler operation is not supported by the target object.
<b>F2</b>	Message Passing Errors.
<b>F20</b>	Message Not Understood by the Receiver.
<b>F21</b>	Control Structure is Not Supported by the Receiver.
<b>F3</b>	Data Underflow Errors.
<b>F30</b>	Virtual Machine Data Stack Underflow
<b>F31</b>	Stack/Queue Underflow
<b>F4</b>	General argument errors.
<b>F40</b>	Data Conversion Error; Unable to convert object to the required type.
<b>F41</b>	The argument value is not in the acceptable range.
<b>F5</b>	I/O Errors.
<b>F50</b>	Error Opening a File for Reading.
<b>F51</b>	Error Opening a File for Writing.
<b>F6</b>	Network Errors. (WIP)
<b>F7</b>	Task/Thread/Fiber Errors. (WIP)
<b>F8</b>	Reserved.
<b>F9</b>	Internal Errors. <sup>45</sup>
<b>F90</b>	Internal Data Structure Error.
<b>F91</b>	Too many Virtual Machines for a thread.

---

<sup>45</sup> Generally these are not so much errors in the application as indications of a bug in the compiler.

## ***Application Error Codes:***

In general, convention indicates that application specific error codes begin with an upper case letter<sup>46</sup> and a two digit code. Further any optional sub-code is placed after a comma (“,”). Some possible interpretations of leading letters are shown below:

<b>Code</b>	<b>Description</b>
<b>Ann</b>	Generic Application Errors.
<b>Cnn</b>	Communication Errors.
<b>Dnn</b>	Database Errors.
<b>Inn</b>	Internal Errors.
<b>Nnn</b>	Network Errors.
<b>Unn</b>	User/Authentication Errors.
<b>Xnn</b>	Unknown or Unspecified Errors.

## ***Ruby Mapped Exception Codes:***

Exceptions generated by Ruby are mapped to fOOrth exceptions. There are a lot of Ruby exceptions, so it is a rather lengthy map.

<b>Code</b>	<b>Description</b>
<b>E01</b>	Argument Error.
<b>E01,01</b>	Gem::Requirement::Bad Requirement Error.
<b>E02</b>	Encoding Error.
<b>E02,01</b>	Encoding::Compatibility Error.
<b>E02,02</b>	Encoding::Converter Not Found Error.
<b>E02,03</b>	Encoding::Invalid Byte Sequence Error.
<b>E02,04</b>	Encoding::Undefined Conversion Error.
<b>E03</b>	Fiber Error.
<b>E04</b>	I/O Error.
<b>E04,01</b>	EOF Error.
<b>E05</b>	Index Error.
<b>E05,01</b>	Key Error.

<sup>46</sup> It is strongly recommended that prefix codes starting in “E” and “F” be avoided.

<b>Code</b>	<b>Description</b>
<b>E05,02</b>	Stop Iteration Error.
<b>E06</b>	Local Jump Error.
<b>E07</b>	Math::Domain Error.
<b>E08</b>	Name Error.
<b>E08,01</b>	No Method Error.
<b>E09</b>	Range Error.
<b>E09,01</b>	Float Domain Error.
<b>E10</b>	Regular Expression Error.
<b>E11</b>	Runtime Error.
<b>E11,01</b>	Gem::Exception.
<b>E11,01,01</b>	Gem::Command Line Error.
<b>E11,01,02</b>	Gem::Dependency Error.
<b>E11,01,03</b>	Gem::Dependency Removal Exception.
<b>E11,01,04</b>	Gem::Dependency Resolution Error.
<b>E11,01,05</b>	Gem::Document Error.
<b>E11,01,06</b>	Gem::End Of YAML Exception.
<b>E11,01,07</b>	Gem::File Permission Error.
<b>E11,01,08</b>	Gem::Format Exception.
<b>E11,01,09</b>	Gem::Gem Not Found Exception.
<b>E11,01,09,01</b>	Gem::Specific Gem Not Found Exception.
<b>E11,01,10</b>	Gem::Gem Not In Home Exception.
<b>E11,01,11</b>	Gem::Impossible Dependencies Error.
<b>E11,01,12</b>	Gem::Install Error.
<b>E11,01,13</b>	Gem::Invalid Specification Exception.
<b>E11,01,14</b>	Gem::Operation Not Supported Error.
<b>E11,01,15</b>	Gem::Remote Error
<b>E11,01,16</b>	Gem::Remote Installation Canceled
<b>E11,01,17</b>	Gem::Remote Installation Skipped
<b>E11,01,18</b>	Gem::Remote Source Exception

Code	Description
<b>E11,01,19</b>	Gem::Ruby Version Mismatch <sup>47</sup>
<b>E11,01,20</b>	Gem::Unsatisfiable Dependency Error
<b>E11,01,21</b>	Gem::Verification Error
<b>E12</b>	System Call Error <sup>48</sup>
<b>E12,E2BIG</b>	Argument list too long.
<b>E12,EACCES</b>	Permission denied.
<b>E12,EADDRINUSE</b>	Address already in use.
<b>E12,EADDRNOTAVAIL</b>	Cannot assign requested address.
<b>E12,EAFNOSUPPORT</b>	Address family not supported by protocol.
<b>E12,EAGAIN</b>	Try again.
<b>E12,EAGAINWaitReadable</b>	Try again?
<b>E12,EAGAINWaitWritable</b>	Try again?
<b>E12,EALREADY</b>	Operation already in progress.
<b>E12,EBADF</b>	Bad file number.
<b>E12,EBUSY</b>	Device or resource busy.
<b>E12,ECHILD</b>	No child processes.
<b>E12,ECONNABORTED</b>	Software caused connection abort.
<b>E12,ECONNREFUSED</b>	Connection refused.
<b>E12,ECONNRESET</b>	Connection reset by peer.
<b>E12,EDEADLK</b>	Resource deadlock would occur.
<b>E12,EDESTADDRREQ</b>	Destination address required.
<b>E12,EDOM</b>	Math argument out of domain of function.
<b>E12,EDQUOT</b>	Quota exceeded.
<b>E12,EEXIST</b>	File exists.
<b>E12,EFAULT</b>	Bad address.
<b>E12,EFBIG</b>	File too large.
<b>E12,EHOSTDOWN</b>	Host is down.
<b>E12,EHOSTUNREACH</b>	No route to host.
<b>E12,EILSEQ</b>	Illegal byte sequence.
<b>E12,EINPROGRESS</b>	Operation now in progress.
<b>E12,EINPROGRESSWaitReadable</b>	Operation now in progress?

<sup>47</sup> This exception is only supported in Ruby 2.1.x and later.

<sup>48</sup> System Call errors are wrappers around operating system error codes. As these vary by operating system, the list that follows is typical, but by no means exhaustive or required. Refer to operating system error code documentation for more information on these errors. The descriptions here are from Linux documentation.



Code	Description
<b>E12,EINPROGRESSWaitWritable</b>	Operation now in progress?
<b>E12,EINTR</b>	Interrupted system call.
<b>E12,EINVAL</b>	Invalid argument.
<b>E12,EIO</b>	I/O error.
<b>E12,EISCONN</b>	Transport endpoint is already connected.
<b>E12,EISDIR</b>	Is a directory.
<b>E12,ELOOP</b>	Too many symbolic links encountered.
<b>E12,EMFILE</b>	Too many open files.
<b>E12,EMLINK</b>	Too many links.
<b>E12,EMSGSIZE</b>	Message too long.
<b>E12,ENAMETOOLONG</b>	File name too long.
<b>E12,ENETDOWN</b>	Network is down.
<b>E12,ENETRESET</b>	Network dropped connection because of reset.
<b>E12,ENETUNREACH</b>	Network is unreachable.
<b>E12,ENFILE</b>	File table overflow.
<b>E12,ENOBUFS</b>	No buffer space available.
<b>E12,ENODEV</b>	No such device.
<b>E12,ENOENT</b>	No such file or directory.
<b>E12,ENOEXEC</b>	Exec format error.
<b>E12,ENOLCK</b>	No record locks available.
<b>E12,ENOMEM</b>	Out of memory.
<b>E12,ENOPROTOPT</b>	Protocol not available.
<b>E12,ENOSPC</b>	No space left on device.
<b>E12,ENOSYS</b>	Function not implemented.
<b>E12,ENOTCONN</b>	Transport endpoint is not connected.
<b>E12,ENOTDIR</b>	Not a directory
<b>E12,ENOTEMPTY</b>	Directory not empty.
<b>E12,ENOTSOCK</b>	Socket operation on non-socket.
<b>E12,ENOTTY</b>	Not a typewriter... what's a typewriter?
<b>E12,ENXIO</b>	No such device or address.
<b>E12,EOPNOTSUPP</b>	Operation not supported on transport endpoint.
<b>E12,EPERM</b>	Operation not permitted.
<b>E12,EPFNOSUPPORT</b>	Protocol family not supported.
<b>E12,EPIPE</b>	Broken pipe.
<b>E12,EPROCLIM</b>	The per-user process limit has been reached.

Code	Description
<b>E12,EPROTONOSUPPORT</b>	Protocol not supported.
<b>E12,EPROTOTYPE</b>	Protocol wrong type for socket.
<b>E12,ERANGE</b>	Math result not representable.
<b>E12,EREMOTE</b>	Object is remote.
<b>E12,EROFS</b>	Read-only file system.
<b>E12,ESHUTDOWN</b>	Cannot send after transport endpoint shutdown.
<b>E12,ESOCKTNOSUPPORT</b>	Socket type not supported.
<b>E12,ESPIPE</b>	Illegal seek.
<b>E12,ESRCH</b>	No such process.
<b>E12,ESTALE</b>	Stale NFS file handle.
<b>E12,ETIMEDOUT</b>	Connection timed out.
<b>E12,ETOOMANYREFS</b>	Too many references: cannot splice.
<b>E12,EUSERS</b>	Too many users.
<b>E12,EWOULDBLOCK</b>	Operation would block.
<b>E12,EWOULDBLOCKWaitReadable</b>	Operation would block?
<b>E12,EWOULDBLOCKWaitWritable</b>	Operation would block?
<b>E12,EXDEV</b>	Cross-device link.
<b>E12,NOERROR</b>	These aren't the droids we're looking for. Move along, move along.
<b>E13</b>	Thread Error.
<b>E14</b>	Type Error.
<b>E15</b>	Zero Division Error.
<b>E30</b>	Signal Exception Detected.
<b>E30,01</b>	Interrupt Detected (Typically Control-C).

## A Brief Overview of Key OO Concepts

A detailed study of object oriented programming principles is far beyond the scope of this User's Guide. What follows is a very brief overview of these concepts as they apply to fOOrth.

In the world of object oriented programming, there are many diverse domains of thought. In the fOOrth language system, two of those domains have their expression:

- Class based object oriented design.
- Prototype based object oriented design.

### ***Class Based OO***

Going all the way back to Smalltalk in 1980, the most common sort of object oriented systems are those that are class based. Classes act as a sort of shared hierarchical label or category for objects (commonly referred to as instances) of that class. Classes provide two main services to the programming environment:

1. They are containers for units of code called methods. These methods are available to all instances of the class as well as any classes based on the class. Reflecting the communal nature of these methods, they are called shared methods in fOOrth. Method definitions in a class override those of classes higher up in the hierarchy.
2. Classes also act as factories or templates for creating instances of their class. This is often done with the `.new` method applied to the class in question but there are other methods as well. Refer to documentation for the class in question in the reference below.

All object oriented behavior flows from these two simple behavioral properties.

In some languages (like C++) classes are not objects. They exist primarily as constructs used by the compiler to generate code. This is not the case with fOOrth where classes are themselves full fledged objects. Given that they are objects, this means that they too are instances of a class. In the case of classes, it turns out that they are instances of the `Class` class. Now the `Class` class is also an object and an instance of a class but what class? Perhaps some `SuperClassyClass`? Nope; The `Class` class is unique in that it is an instance of *itself*. This unusual condition is shared by all Smalltalk like languages.

Class based object oriented programming is utilized by a vast number of modern programming languages, far too numerous to mention.

### ***Class Based Inheritance***

Classes are related to one another through inheritance. A single class, called `Object`, is the root of the entire tree of classes. This nested hierarchy of classes in the fOOrth system is illustrated below:

**Object**  
**Array**  
**Class**  
**Duration**  
**FalseClass**  
**Hash**  
**InStream**  
**Mutex**  
**NilClass**  
**Numeric**  
    **Complex**  
    **Float**  
    **Integer**  
        Bignum  
        Fixnum  
    **Rational**  
**OutStream**  
**Procedure**  
**Queue**  
**String**  
**Thread**  
**Time**  
**TrueClass**  
**VirtualMachine**

Classes (other than Object) inherit behaviors from their ancestor or parent classes. Thus the capabilities of objects is able to “layer” over the capabilities of their parent classes. This property can be used for a number of different effects:

*Code Reuse:* Code in the parent class is effectively shared by all classes the are derived from the base class. By default the subclass retains all of the operations of the base class. Thus code common to several classes can be “factored-out” to a common base class.

*Specialization:* Sub-classes can be created that are more specialized variants of the base class. For example: If a class called Animal existed, a subclass of Animal called Mammal would have the characteristics of an animal plus the special characteristics of a mammal.

For a concrete example in the fOOrth hierarchy consider that the Integer class is a more specialized version of the Numeric class.

*Restriction:* Sub-classes can be created to limit the behavior of the class. Consider a Document class and its subclass ReadOnlyDocument. The ReadOnlyDocument would limit and restrict actions that might modify the document but would otherwise inherit other behavior from the Document base class.

In fOOrth, the Complex class restricts actions in the Numeric base class that require the value to be treated as a magnitude. Complex numbers are not magnitudes so these actions (such as the > operator) are restricted.

## **Prototype Based OO**

While class based inheritance is the classical approach to sharing behaviors, there is another way this can be done: Prototype based object oriented design.

In this approach, there exists no special hierarchy of classes. Instead, all objects can take on the crucial two tasks normally ascribed to classes.

1. They are containers for units of code called methods. These methods are bound to individual objects. Reflecting the limited nature of these methods, they are called exclusive methods in fOOrth. Method definitions in a object override older method definitions for that object.
2. Objects can also act as factories or templates for creating instances of themselves. This is often done with the .clone method applied to the class in question but there may be other methods as well.

In practice, a prototypical object is created and its attributes are set up once. Then when more instances of this object are needed, it is simply cloned. The clones can then function as separate entities from the original. They can even have additional attributes added to them and can then serve as prototypes themselves. In this way prototype based inheritance is also supported.

In this way, the goals of *Specialization* and *Restriction* discussed above may be achieved in a prototype based system without the use of classes.

The primary language based on prototypes is ECMAScript<sup>49</sup> (aka JavaScript).

## **Methods in fOOrth**

All code in fOOrth is contained in methods. A method is a fragment of code that an object uses to respond to a message that has been sent to that object. In fOOrth there are three sorts of methods:

- Shared: Methods that are common to all instances of the class that contains them.
- Exclusive: Methods that are defined for one and only one object (and all of its clones that are created *after* the exclusive method is defined.).
- Local: Methods that are created in a context and are accessible only in that context. When the context concludes, these methods are no longer accessible.

---

<sup>49</sup> Even though Ruby tolerates prototype based programming, it does not really embrace it.

## ***Late Binding and Polymorphism***

Some programming languages like C++ and Java use classes and inheritance as the basis for data typing, late binding and polymorphism. This is not the case in fOOrth<sup>50</sup>.

In fOOrth, the connection between a message and the object that is to receive that message does not occur until the message is actually sent at run time. That is what late-binding is all about.

A side effect of this is that the receivers of messages need only be capable of responding to the specific messages sent to them. They are not required to be part of a certain class sub-tree, or have some connection to a known base class. Thus polymorphism is achieved through message interface compatibility or “duck” typing.

## ***Summary***

Given that both class and prototype based object oriented design are present in fOOrth, it is anticipated that well designed fOOrth programs will take a hybrid approach, using each system where it is best suited to the task at hand.

For example, rather than starting with a generic object and adding all needed attributes to that object, a more advanced class may be utilized and then extended to create a prototype for new objects without creating another class.

---

<sup>50</sup> Or in the underlying Ruby implementation, for that matter.

## Method Mapping

In fOOrth, method names are represented as simple strings. In the underlying Ruby implementation, specialized “symbol” objects are used for this task. In running fOOrth on top of an existing Ruby system, there were a number of issues that needed to be resolved.

1. The strings used by fOOrth needed to be converted to Ruby symbols to allow code to be executed in Ruby.
2. The symbols used indirectly by fOOrth can not be allowed to conflict with the myriad of symbols already in use by Ruby. Symbol collisions would cause the language system to fail catastrophically as methods were redefined in an incoherent manner.
3. The mapping of symbols had to allow some strings to map to known symbols so that Ruby code code be constructed that uses those symbols for internal actions.

In the reference implementation of fOOrth this mapping task is the responsibility of the SymbolMap class. This class creates mappings in one of two ways:

1. Be default, a symbol is generated of the form `:_dddd` where `dddd` represents a counting sequence of digits (not limited to four digits by the way). Since Ruby has no methods or symbols defined in this way, the odds of a symbol space collision are very low indeed.
2. The alternative is to explicitly specify the symbol used in the mapping. This special case is used when Ruby code needs to send or otherwise use a fOOrth symbol. In this case, the programmer is responsible for ensuring that no name space collisions occur.

### *Exploring the mapping system*

The user is able to explore the symbol table through two command commands provided for that purpose, the `)map` and `)unmap` methods. These are demonstrated below:

```
> )map "+"
+ => _016

> )unmap "_016"
_016 <= +
```

In the above example, the addition (“+”) operator maps to the symbol `_016`. The next line shows `_016` mapping back to addition. The next example shows a method name with a “custom” mapping:

```
> )map ".init"
.init => foorth_init

> )unmap "foorth_init"
foorth_init <= .init
```

Another command for exploring the symbol mapping space is the `)entries` command. This

command generates a listing of all symbols currently defined in the system at that point in time. The command generates a paginated, formatted output.

```
> )entries
Symbol Map Entries =
!          .[]!          .getc          .reverse       0>
!:         .[]@          .gets          .right         0>=
"          .abs          .hypot         .right?       1+
... <voluminous output deleted>
```

An example of the output of the )entries command is found in the section Appendix A – Symbol Glossary.



## Context

Whenever code is executed in anyway in fOOrth, whether interactively, loading a file, or compiling a method, it does so in the presence of a context. In fOOrth, the context is a nested description of the current system's conditions. When a new level of nesting is encountered, an new layer of context is added.

The context concept is useful for keeping track of important information for the compiler. Among this information is:

Tag	Description
virtual machine	The VM associated with this context.
mode	The compiler mode: execute, deferred or compile modes.
ctrl	The control tag associated with this nest structure.
cls	The class that is the target of this operation.
obj	The object that is the target of this operation.
action	A pending action to be performed when a control structure is completed.
local methods	Any local (or context) methods defined.

Note that most elements of context are optional and do not always occur.

### ***Exploring Context***

At this time, the context system is not available at the fOOrth programming level, however, a few methods are available for exploring the context system. The first is the command `)context`. This command lists the current context information at the console. For example:

```
> )context

Context level 1
virtual machine => VirtualMachine instance <Main>
mode => execute
```

Now, context is largely used by the compiler, so another method `)context!` is more useful. This method has the immediate attribute, meaning that it executes, even when the mode is deferred or compiling. This allows us to take a peek at the context inside of the working compiler. Consider these examples:

```
> true if )context! else )context! then

Context level 2
```

```

ctrl => if
mode => deferred
"else" => #<Xf0Orth::LocalSpec:0x21eaf30>
"then" => #<Xf0Orth::LocalSpec:0x21eaea0>

Context level 1
virtual machine => VirtualMachine instance <Main>
mode => execute

Context level 2
ctrl => if
mode => deferred
"then" => #<Xf0Orth::LocalSpec:0x21eaea0>

Context level 1
virtual machine => VirtualMachine instance <Main>
mode => execute

```

The first `)context!` executes in the body of the “if” clause and the second one executes in the body of the “else” clause. Note how a local method “else” is defined in the first block, but is no longer defined in the second context listing. This reflects the fact that only one “else” clause is allowed in a “if” statement.

Another example is a simple method:

```

>: fred )context! dup + ;

Context level 2
mode => compile
ctrl => :
action => #<Proc:0x22702e0@C:/.../compile_library.rb:17 (lambda)>
virtual machine => VirtualMachine instance <Main>
"var:" => #<Xf0Orth::LocalSpec:0x22700d0>
"val:" => #<Xf0Orth::LocalSpec:0x2270010>
"var@:" => #<Xf0Orth::LocalSpec:0x226bed0>
"val@:" => #<Xf0Orth::LocalSpec:0x226bd98>
"super" => #<Xf0Orth::LocalSpec:0x226bc00>
";" => #<Xf0Orth::LocalSpec:0x226bb10>

Context level 1
virtual machine => VirtualMachine instance <Main>
mode => execute

```

The context activity reflects the activities of the compiler in compiling the code. The mode is compile mode, the ctrl is a “:” since that started the compile, an action is pending to attach the method when the compilation is completed and several local methods are defined. These include methods for local and instance data, access to the super-method, and the “;” that ends the compilation process.

The `)context!` method may be used to gain insight into the compilation process. Since it executes immediately, it does not affect the code generated.

## ***Tracking the Virtual Machine***

As important as the context is to the state of the compiler, it is only part of the story. The other major player in this drama is the Virtual Machine itself. So fOOrth provides two introspection methods to reveal key points in the state of the VM. These commands are `)vm` and its immediate version `)vm!`.

The following is the VM state at the console prompt:

```
> )vm

VirtualMachine instance <Main>
  Ruby      = #<XfOOrth::VirtualMachine:0x22049a0>
  Stack     = []
  Nesting   = 1
  Quotes    = 0
  Debug     = false
  Show      = false
  Force     = false
  Start     = 2015-05-03 09:49:08 -0400
  Source    = The console.
  Buffer     = ")vm"
```

The snippets file `show.forth` reveals the tracking of code sources when loading code:

```
> )load"docs/snippets/show
Loading file: docs/snippets/show.forth

VirtualMachine instance <Main>
  Ruby      = #<XfOOrth::VirtualMachine:0x22049a0>
  Stack     = []
  Nesting   = 1
  Quotes    = 0
  Debug     = false
  Show      = false
  Force     = false
  Start     = 2015-05-03 09:49:08 -0400
  Source    = A file: docs/snippets/show.forth
  Buffer     = ")vm"
Completed in 0.1 seconds
```

As can be seen, the VM has its vital stack, source, and tracking for quotes and structure nesting as well as various optional modes.

Note that the Force flag is a hold-over from FORTH. This flag overrides the immediate status of the next word compiled, forcing it to be compiled rather than executed. At this point, this feature is not employed in fOOrth. Like the return stack, this may be removed at some point if it does not prove useful.



## Routing

Message routing in fOOrth has two separate but interrelated aspects: When methods are being defined a method specification must be created and stored in the appropriate location. This creates routing information. Then when methods are being compiled into code, the compiler must be able to locate the correct method specification so that the correct output code is generated. This uses routing information.

The key responsibility of these specifications is to determine the message receiver when the method is compiled. This is one area where the terse, concise RPN of fOOrth can be a liability. The lack of redundancy sometimes makes it difficult to determine the intended message receiver.

In FORTH, this is never an issue since all words exist as subroutines of the virtual machine. In fOOrth, a number of factors determine the type of method and thus its routing. These are:

1. The defining word used to create the method.
2. The receiver of the defining word used to create the method.
3. The name of the method.

The various method mapping and routing targets are reflected in the ways by which methods may be defined. These next sections review the types of methods, their mapping and routing, and how they are used in the fOOrth language system.

### ***Virtual Machine Methods***

Virtual Machine methods are the part of fOOrth that comes closest to classical FORTH. In these methods the target of the method is the current virtual machine associated with the executing thread and the compiler that created the method in the first place. Since there is always a virtual machine present, these methods are never out-of-context. This allows these methods alone to support immediate mode in which methods are executed even when the system is in a deferred or compile state.

To define a standard Virtual Machine method use:

```
: name (method body here) ;
```

To define an immediate method use this similar format:

```
!: name (method body here) ;
```

The rules for naming virtual machine methods are the most liberal. They must not contain spaces, and if a " is present it is the last character in the name and a string literal is part of the method name when run. See String Literals in the section the Syntax and Style of fOOrth.

## **Shared Methods**

Shared methods are those methods that are shared by all the member of a class and its sub-classes. All of the different sorts of shared methods a defined using the following construction:

```
A_Class .: method_name (method body here) ;
```

The method name may not contain spaces. Further the method name is responsible for determining the routing used and any embedded string data.

The lead character determines the routing:

- “.” - indicates that the message is routed to the top-of-stack element (TOS)
- “~” - indicates that the message is routed to the “self” entity of the method (see the section Self below). Since these messages are only routed to the object itself, they are in effect private methods.
- Other – these methods are used to implement dyadic operators. To do this they are routed to the next element on the stack (NOS). This corresponds to the “left binding” of dyadic operators.

The presence of a " character in the method name indicates a trailing string is embedded in the method name. See String Literals in the section the Syntax and Style of fOOrth. Shared methods add an additional criteria on the use of embedded strings:

If the shared method is routed to TOS and there is an embedded string, then the class of the method must be String, otherwise an error is reported.

## **Exclusive Methods**

Exclusive methods are defined on an individual object as opposed to all the instances of a class of objects. All of the different sorts of shared methods are defined using the following construction:

```
an_object .:: method_name (method body here) ;
```

The method name may not contain spaces. Further the method name is responsible for determining the routing used and any embedded string data.

The lead character determines the routing:

- “.” - indicates that the message is routed to the top-of-stack element (TOS)
- “~” - indicates that the message is routed to the “self” entity of the method (see the section Self below). Since these messages are only routed to the object itself, they are in effect private methods.
- Other – these methods are used to implement dyadic operators. To do this they are routed to the next element on the stack (NOS). This corresponds to the “left binding” of dyadic operators.

The presence of a " character in the method name indicates a trailing string is embedded in the method name. See String Literals in the section the Syntax and Style of fOOrth. Shared

methods add an additional criteria on the use of embedded strings:

If the shared method is routed to TOS and there is an embedded string, then the class of the method must be String, otherwise an error is reported.

### **Shared Stub Methods**

– Not implemented. Currently part of the implementation but not yet part of the language.

### **Exclusive Stub Methods**

– Not implemented. Currently part of the implementation but not yet part of the language.

### **Local Methods**

– Not implemented. Currently part of the implementation but not yet part of the language.

The various combinations of the above are summarized below:

<b>Defining Word</b>	<b>DW Receiver</b>	<b>Method Name</b>	<b>Message Routing</b>	<b>Notes</b>
:	N/A	any <sup>51</sup>	VM <sup>52</sup>	A virtual machine method.
::	A Class	.name	TOS <sup>53</sup>	A public shared instance method.
	A Class	~name	Self <sup>54</sup>	A private shared instance method.
	A Class	other	NOS <sup>55</sup>	A public shared dyadic operator.
	N/A	invalid <sup>56</sup>	N/A	Not allowed: Error
:::	A Class	.name	TOS	A public class method
	An Object	.name	TOS	An public exclusive instance method.
	A Class	~name	Self	A private class method
	An Object	~name	Self	A private exclusive instance method.
	A Class	other	NOS	A public class exclusive dyadic operator
	An Object	other	NOS	A public exclusive dyadic operator
	N/A	invalid	N/A	Not allowed: Error
tbd <sup>57</sup>	N/A	other	Context	A context local method.

51 The names of Virtual Machine methods have no restrictions except that they contain no spaces.

52 The message receiver is the Virtual Machine.

53 The message receiver is the Top element of the Data Stack.

54 The message receiver is the implicit "self" of the method owner.

55 The message receiver is the Second element of the Data Stack.

56 Any method beginning with an upper case letter or \$ or # or @ is invalid and will generate an error.

57 At this time, local methods are cannot be defined by the programmer. They are all builtin methods.

## Routing Internals

As code is being compiled, the specification for each method must be located. This task is performed by the virtual machine's linked list of context objects. This is the sensible place for this to occur as routing is context sensitive.

The process of routing involves searching for the specification in an ordered list of places. This list is sensitive to the name of the method being processed as well as the target of the compilation process and any local, context sensitive definitions. This is summarized below:

Method	.name	~name	@name	\$name	#name	other
<b>Filter Regex</b>	/^\./	/^~/	/^@/	/^\\$/	/^#/	Other
<b>Search List</b>	Object VM TOS	Target Class Target Object VM Self	Target Class Target Object VM Error	Global Error	VM Error	Local Object VM Global Error

Where the search list entries are defined as:

Search Location	Search Description
Object	Search the class Object for a specification.
VM	Search the class VirtualMachine for a specification.
Target Class	Search the class targeted by this compile action (if any) for a specification. Note this also searches any parent classes of the target class.
Target Object	Search the object targeted by this compile action (if any) for a specification. Note this also searches the object's class and any parent classes of the that class.
Local	Search the compiler context tree for a specification.
Global	Search the global name space for a specification.
TOS	Assume that this method uses TOS routing and create a temporary default specification.
Self	Assume that this method uses Self routing and create a temporary default specification.
Error	Unable to find a specification. Signal an error. (See Spec Error below)



## Spec Errors

When compiling a token into a method or looking it up to executed interactively, the fOOrth virtual machine performs several checks based on the text of the language token. A Spec Error is reported when this search is unable to locate a specification for the token. A Spec Error takes the form:

```
F11: ?name?
```

There are two basic ways that a spec error may be encountered:

### ***Method is Out of Context***

The first of these is that the programmer has written code that contains context sensitive methods, outside of that context. As a classic case of this consider the “if” and the “else” methods. Normally “else” only makes sense if there is an “if” for it to be “bound” to. Thus if you simply enter “else” there are potentially two outcomes:

```
>else
```

```
F10: ?else?
```

Or:

```
>else
```

```
F11: ?else?
```

In the first case, the system has never encountered an “if” statement, so “else” is completely undefined. In the second case , “if” statements have been encountered, but the “else” is out of context. Given how common “if” statements are, this second error message is far more likely, but for rarer control structures, the first error may be seen.

### ***Incorrect Routing Information***

The second way to get a spec error is caused by the routing information not being set up correctly. To be clear, this should not happen. They are a sort of internal compiler error that things are not quite right. As such this version needs to be reported as a bug.

As this error should not happen, there is currently no example of this case. However, should one occur, it would likely take the form of a spec error on a method that *should* be in the correct context.



## Self

Whenever code executes in the fOOrth language system, there is an object that “owns” that code. Even code run at the console interactively belongs to an object, the virtual machine.

In fOOrth, the “self” method gives the programmer explicit access to this owning object. Let's try this from the console:

```
>self .  
VirtualMachine instance <Main>
```

The console code is run in the context of an instance of a Virtual Machine named “Main”. What about some methods? Here is a simple method:

```
>: show_self self . ;  
  
>show_self  
VirtualMachine instance <Main>
```

This has the same owner which is not unexpected as show\_self is a virtual machine method. How about something more interesting:

```
>class: MyClass  
  
>MyClass .: .show_self self .name . ;  
  
>MyClass .new .show_self  
MyClass instance
```

For this shared method on the class MyClass, self is an instance of MyClass.

### ***Applying Self***

So far, the self value seems pretty academic. Let's see the ways this value affects fOOrth code:

1. The self is the target for self routed methods. These are methods that begin with “~” (see Shared Methods and Exclusive Methods above). The use of self routing has big savings. There is no need to retrieve the value, “~” methods can act on it without any preamble. There is no need to worry about where the receiver is on the stack, self is always available.
2. For TOS routed methods, access to self is as simple as “self .method\_name”. This was done in the MyClass example above. The self value is a free value that does not to be declared.
3. When instance values and variables (see Data Storage in fOOrth above) are created, they are always applied to the self object. Access to these values and variables is also in reference to self. Thus, by default, these data are only directly accessible inside methods of the object holding those data.

4. In some methods that take a block, the self in the block is often very useful. A good example of this is in file I/O classes line InStream (see below). The InStream .open{ ... } method for example. In the block (delimited by the { and } characters) self is defined to be the InStream instance. This allows easy access to the file data with “~” methods.

## Changing Self

There are times that we all wished we were someone else. In a fOOrth program there are instances where it would be advantageous to have self be something else. This is accomplished using the .with{{ ... }} construction. A few simple examples:

```
>"Test String" .with{{ self .name . }}  
String instance  
>MyClass .new .with{{ self .name . }}  
MyClass instance
```

The receiver of the “.with{{“ method becomes the “self” within the block it defines. The uses of these control structures include those listed above, but there are some additional points specific to this application:

1. By applying a .with{{ ... }} clause, the program gains access to “~” methods of the target. In addition, it also allows access to instance values and variables of that object. On the downside, it removes access to “~” methods and instance values and variables of the method the .with{{ ... }} clause was contained in.
2. This clause makes it easy to define new instance values and variables to an individual object. This is much easier to do than creating an exclusive method and then executing it once. This facilitates the setup of prototype objects (see Prototypes above).
3. A .with{{ ... }} clause can be used to take a value and give easy access to that value within the executed block without having to create a local value.
4. Access to the self value is generally faster than other forms of access. Thus this construct can yield performance enhancements.

## Boolean Data

In fOOrth, there is no class called Boolean. Instead, the functionality of Boolean logic are built into other classes, and not always the class you'd expect. Thus Boolean data could use a little explanation and clarification.

### ***What values represent true and false?***

This is fundamental to the operation of fOOrth and in this area, fOOrth pretty much follows Ruby's lead. Here is a complete overview of what constitutes true and false:

False Values	True Values
false nil	Everything else!

That's it. In particular, the number 0, and the empty string are true, and *not* false.

### ***Processing Boolean Data***

In processing Boolean data, fOOrth takes the common approach of processing from the perspective of the true or false message receiver. This technique goes back to the very earliest object oriented programming systems. What may surprise is where this processing takes place. This is illustrated below:

False Processing	True Processing
FalseClass NilClass	Object

Note that while false processing occurs in FalseClass and NilClass, true processing occurs in Object and not TrueClass. In fact the only purpose for TrueClass is to be the class for the value true. It has no methods of its own. All of the work processing true values is in the Object class.

### ***Boolean Constants***

Boolean value constants are: true, false and nil. These values may be used in any context.



## Numeric Data

The fOOrth language system has an elaborate level of support for numeric data that bears close examination in its own right. The numeric class tree consists of these classes:

Class	Description
Numeric	The abstract base class for all concrete numeric values.
Complex	Complex numbers in the form $a+bi$ where “a” and “b” represent real numbers and “i” represents the square root of -1.
Float	The class of floating point numbers based on the IEEE standard.
Integer	An abstract class for whole numbers
Bignum <sup>58</sup>	The class of really really big whole numbers
Fixnum	The class of whole number that fit into one memory word.
Rational	Rational number in the form $a/b$ where “a” and “b” are whole number and “b” is not zero.

In this system most operations are defined at the level of numeric with a few exceptions:

- Integer defines a few “bit” oriented operations that are specific to whole numbers.
- Complex stubs out several methods that require values to be comparable as magnitudes. Complex numbers are not magnitudes so these operations are invalid. See the Complex class below for more details on the methods that are affected.

---

<sup>58</sup> The presence of the Bignum and FixNum classes is a case of the Ruby implementation “leaking” through to the fOOrth language. For operations on integer values, the use of the Integer class is strongly recommended.





## Procedure Data

It may be odd to consider that code (procedures) be treated as data, but in fOOrth, this is exactly the case. With the Procedure class of objects, procedures can be created, stored, and passed as arguments to methods.

In addition, fOOrth supports Procedure Literal values, in much the same way that it supports numeric or string literal values. With strings, any method whose name ends with a double quote mark (") will be followed by a string literal that ends when the matching closing double quote mark is encountered.

It is similar with procedures. Any method whose name ends with "{{" contains a procedure literal value that ends when the matching "}}" is found. The simplest example of this is the "{{" with no method name:

```
{{ dup + }}
```

This code creates a simple procedure and leaves a reference to that procedure on the stack. This is similar to the action of the string literal:

```
"Testing 1 2 3"
```

Which leaves a reference to the string "Test 1 2 3" on the stack.

### **Values and Indexes**

A very common use for procedure literals is to serve as the "brains" for action oriented methods like .each{{. As can be seen, the .each{{ method ends with {{ so a procedure literal follows. Like many such methods, the .each{{ method needs to send some additional data to the procedure. These data are a value and the index associated with that value. Inside the procedure these are accessed with the local methods "v" and "x" respectively.

Note: If no value or index are defined in the current context, then the local methods "v" and "x" simply return the value nil.



## A fOOrth Reference

The following sections contain a class by class reference to the fOOrth language. For each class, a number of sub-sections, some optional, are present. These are:

- A summary of the class's inheritance. For example: “Inheritance: Array ← Object”
- A summary of the various sorts of class methods, instance methods, stubs, and helper methods. Some or all of these may be absent if they are not present in the class under discussion.
- A description of literal values of this class, if they are supported.
- A description of other optional attributes of the class such as special methods for creating instances of the class, special values, formatting, parsing, etc.
- Class methods. These are methods that bind to the class object itself. That is, class methods are exclusive methods of the class object.
- Instance methods. These are methods that bind to instances of the class being discussed. That is, class methods are shared methods of the class object.
- Stub methods. These are methods that are disallowed for this class, or placeholders for classes derived from this class. They can be either class methods or instance methods. Attempting to send a stub method will result in an error.

A typical method looks description like:

<b>[array object] + [array]</b>	
Routing: NOS	
This method overrides the stub defined in the Object class. For arrays, the plus operation is defined as concatenation. The result is a new array with the object appended. If the object is also an array, the elements of that array are concatenated.	
Note: This method does <i>not</i> mutate the original array.	
Code	Result
[ 1 2 ] 3 +	[ 1 2 3 ]
[ 1 2 ] [ 3 4 ] +	[ 1 2 3 4 ]
[ 1 2 ] [ [ 3 4 ] ] +	[ 1 2 [ 3 4 ] ]

Where the title line is a summary of the action of this method. The first [ ] describes the required conditions on the stack before the method is executed, the method name along with possible

embedded arguments follows, and the trailing [ ] describes conditions on the stack after the method has executed.

The routing line describes the type of message routing used. These can be VM, TOS, NOS, Self, or Compiler Context. See Routing above for more details.

Then a (clear, concise and illuminating) description of the method and any noteworthy or cautionary information follows.

Finally, a series of examples, depicting some sample code and the results (on the stack) of executing that code.

Note that some methods have further sections that describe any local methods created within its context. These are described under the sub-heading of “Local Methods”. Local methods only exist within the context of the methods that create them. When that context ends, those methods are no longer accessible.

# Array

Inheritance: Array ← Object

```
Array Class Methods =
.new_size    .new_value  .new_values .new{{

Array Shared Methods =
!            .-midlr     .map{{      .scatter    .to_s
+            .-right    .max        .select{{   .to_t
.+left      .[]!         .mid        .shuffle    .to_t!
.+mid       .[]@       .midlr      .sort       <<
.+midlr     .each{{      .min        .split      @
.+right     .empty?    .pp         .strmax
.-left      .length     .reverse    .to_duration
.-mid       .length     .right      .to_duration!
```

```
Helper Methods =
.gather     .join       .new        [          gather
```

Array objects<sup>59</sup> are collections of data indexed by an integer value from 0 through N where N is an arbitrary, non-negative, non-stellar, whole number. The fOOrth language system supports the creation of array literals and has several methods for putting data into and pulling data out of arrays.

## Array Literals

Array literals are supported by the virtual machine method “[” and a locally defined method “]”. The general usage is:

```
[ (data generating code goes here) ]
```

Where the data generation code is code that deposits zero or more data elements onto the stack. When the closing “]” is encountered, these data elements are scooped up and placed into an array at the top of the stack. Here are some illustrations of array literals in action:

```
>[ ] .
[ ]
>[ (data generating code goes here) ] .
[ ]
>[ 1 2 3 ] .
[1, 2, 3]
>[ 2 "for" 1 true ] .
[ 2 "for" 1 true ]
```

Some points of interest:

- The first two examples both create “empty” arrays with zero data elements.

<sup>59</sup> Please see [http://en.wikipedia.org/wiki/Array\\_data\\_structure](http://en.wikipedia.org/wiki/Array_data_structure) for more information.

- Array data do NOT need to be the same “type” of data. Mixing is allowed.
- Any statements that generate data are permitted. Consider:

```
>[ 1 11 do i loop ] .
[ 1 2 3 4 5 6 7 8 9 10 ]
>[ 1 11 do i dup * loop ] .
[ 1 4 9 16 25 36 49 64 81 100 ]
```

- Array literals may be nested. Just be sure to properly nest the brackets.

```
>[ 1 2 [ 3 ] ] .
[ 1 2 [ 3 ] ]
```

## Array Literal Methods

<p><b>[stuff] [ [[stuff]]</b></p> <p>Routing: VM</p> <p>This method starts the creation of an array literal. It does so by taking the entire contents of the data stack and placing it into a holding array. This frees up the stack for the task of creating the array.</p>	
Code	Result
1 2 [	[ 1 2 ]
<p><b>Local Methods:</b></p>	
<p><b>[[stuff] d1 d2 ... dn] [stuff, [d1, d2, ... dn]]</b></p> <p>Routing: Compiler Context.</p> <p>This method takes the data that has been gathered onto the stack and creates the array literal while also restoring the deeper levels of the stack.</p>	
Code	Result
1 2 [ 3 4 ]	1 2 [ 3 4 ]

## Array Literals in Action

The following shows the action of the code 1 2 [ 3 4 5 ] with )show and )debug active:

```
>1 2
Tags=[:numeric] Code="vm.push(1); "
Tags=[:numeric] Code="vm.push(2); "

[ 1 2 ]
>I
Tags=[:immediate] Code="vm._214(vm); "
```

```

    nest_context
    Code="vm.squash; "

[ [ 1 2 ] ]
>>3 4 5
Tags=[:numeric] Code="vm.push(3); "
Tags=[:numeric] Code="vm.push(4); "
Tags=[:numeric] Code="vm.push(5); "

[ [ 1 2 ] 3 4 5 ]
>>1
Tags=[:immediate] Code="vm.context[:_311].does.call(vm); "
    unnest_context
    Code="vm.unsquash; "

[ 1 2 [ 3 4 5 ] ]

```

## Class Methods

### [Array] .new [[]]

Routing: TOS

This method is actually the default implementation inherited from the Object class. It creates a new, array object with zero data elements. It is equivalent to the array literal “[ ]”.

Code	Result
Array .new	[ ]
[ ]	[ ]

### [size Array] .new{{ ... }} [[d<sub>1</sub>, d<sub>2</sub>, d<sub>3</sub> ... d<sub>size</sub>]]

Routing: NOS (since the Procedure Literal is TOS)

It creates an array of size elements where the values are created by the embedded procedure literal block. If no value is left on the stack, an error occurs. The current element index is available in the block via the local method “x”. For more information on the methods local to the embedded procedure, see the Procedure class.

Code	Result
10 Array .new{{ x }}	[ 0 1 2 3 4 5 6 7 8 9 ]
0 Array .new{{ x dup * }}	[ 0 1 4 9 16 25 36 49 64 81 ]
10 Array .new{{ }}	F30: Data Stack Underflow: pop

### [size Array] .new\_size [[0<sub>1</sub>, 0<sub>2</sub>, 0<sub>3</sub> ... 0<sub>size</sub>]]

Routing: TOS

This method creates an array of the specified size, pre-filled with the value zero.

Code	Result
5 Array .new_size	[0, 0, 0, 0, 0]
0 Array .new_size	[]
-4 Array .new_size	E01: negative array size
"apple" Array .new_size	F40: Cannot coerce a String instance to an Integer instance

### [value Array] .new\_value [[value]]

Routing: TOS

This method creates an array with a single element, value. It is equivalent to the expression “[ value ]”.

Code	Result
42 Array .new_value	[42]

### [value size] .new\_values [[value<sub>1</sub>, value<sub>2</sub>, value<sub>3</sub> ... value<sub>size</sub>]]

Routing: TOS

This method creates an array of the specified size and pre-filled with the specified value.

**Note:** If the value used is mutable, be warned that the same value is used for *all* of the array elements and a change to one element will affect *all* of them.

Code	Result
false 5 Array .new_values	[false, false, false, false, false]
"Hello" 3 Array .new_values	["Hello", "Hello", "Hello"]



## Instance Methods

### [value array] ! []

Routing: TOS

This method overrides the stub method defined in Object. The store data operator is normally used to store a new value via a data reference. It happens to also work with arrays, but this is an edge case. When applied to an array, the value is stored in the data element indexed by the value zero (0).

Note: This also happens to be the implementation of the “!” operator used with references in general. In that context, this method updates the value associated with a reference. In terms of classical FORTH, it stores a value into a variable.

Code	Result
7 some_array !	(some_array[0] equals 7)
42 myvar !	(Updates the value of myvar to 42)

### [array object/array] + [array]

Routing: NOS

This method overrides the stub defined in the Object class. For arrays, the plus operation is defined as concatenation. The result is a new array with the object appended. If the object is also an array, the elements of that array are concatenated.

Note: This method does *not* mutate the original array.

Code	Result
[ 1 2 ] 3 +	[ 1 2 3 ]
[ 1 2 ] [ 3 4 ] +	[ 1 2 3 4 ]
[ 1 2 ] [ [ 3 4 ] ] +	[ 1 2 [ 3 4 ] ]

### **[width source\_array/object target\_array] .+left [array]**

Routing: TOS

This method removes the first (leftmost) width elements from a copy of the target array and replaces them with the elements from the source array.

Note: This method does *not* mutate the original array.

<b>Code</b>	<b>Result</b>
2 [ 9 ] [ 1 2 3 ] .+left	[ 9 3 ]
2 9 [ 1 2 3 ] .+left	[ 9 3 ]

### **[posn width source\_array/object target\_array ] .+mid [array]**

Routing: TOS

This method removes width elements from the target array starting at position “posn”. It then inserts the elements from the source array into the “gap”, creating a new array in the process.

Notes:

- This method does *not* mutate the original array.
- Only non-negative positions and widths are supported.

<b>Code</b>	<b>Result</b>
1 2 [ 5 ] [ 1 2 3 4 ] .+mid	[ 1 5 4 ]
1 2 5 [ 1 2 3 4 ] .+mid	[ 1 5 4 ]
-1 2 5 [ 1 2 3 4 ] .+mid	F41: Invalid index: -1 in .+mid
1 -2 5 [ 1 2 3 4 ] .+mid	F41: Invalid width: -2 in .+mid

## **[left right source\_array/object target\_array] .+midlr [array]**

Routing: TOS

This method removes elements from the target array starting at position “left” and ending at position “right” counting from the end of the array. It then inserts the elements from the source array into the “gap”, creating a new array in the process.

Notes:

- This method does *not* mutate the original array.
- Only non-negative widths are supported.

<b>Code</b>	<b>Result</b>
1 1 [ 8 9 ] [ 1 2 3 4 5 ] .+midlr	[ 1 8 9 5 ]
1 1 "apple" [ 1 2 3 4 5 ] .+midlr	[ 1 "apple" 5 ]
-1 1 "apple" [ 1 2 3 4 5 ] .+midlr	F41: Invalid left width: -1 in .-midlr
1 -1 "apple" [ 1 2 3 4 5 ] .+midlr	F41: Invalid right width: -1 in .-midlr

## **[width source\_array/object target\_array] .+right [array]**

Routing: TOS

This method removes the last (rightmost) width elements from the target array and replaces them with the elements of the source array.

Notes:

- This method does *not* mutate the original array.
- Only non-negative widths are supported.

<b>Code</b>	<b>Result</b>
3 [ 8 9 ] [ 1 2 3 4 5 ] .+right	[ 1 2 8 9 ]
3 "apple" [ 1 2 3 4 5 ] .+right	[ 1 2 "apple" ]
-3 "apple" [ 1 2 3 4 5 ] .+right	F41: Invalid width: -3 in .+right

## **[width array] .-left [array]**

Routing: TOS

This method removes the first (leftmost) width elements from a copy of the source array.

Notes:

- This method does *not* mutate the original array.
- Only non-negative widths are supported.

<b>Code</b>	<b>Result</b>
3 [ 1 2 3 4 5 ] .-left	[ 4 5 ]
-3 [ 1 2 3 4 5 ] .-left	F41: Invalid width: -3 in .-left

## **[posn width array] .-mid [array]**

Routing: TOS

This method removes width elements from a copy of the array starting at position “posn”.

Notes:

- This method does *not* mutate the original array.
- Only non-negative positions and widths are supported.

<b>Code</b>	<b>Result</b>
1 2 [ 1 2 3 4 5 ] .-mid	[ 1 4 5 ]
-1 2 [ 1 2 3 4 5 ] .-mid	F41: Invalid index: -1 in .-mid
1 -2 [ 1 2 3 4 5 ] .-mid	F41: Invalid width: -2 in .-mid

## [left right array] .-midlr [array]

Routing: TOS

This method removes elements from the target array starting at position “left” and ending at position “right” counting from the end of the array. Put another way, it keeps left elements on the left and right elements on the right and drops the middle.

Notes:

- This method does *not* mutate the original array.
- Only non-negative widths are supported.

Code	Result
1 1 [ 1 2 3 4 5 6 ] .-midlr	[ 1 6 ]
-1 1 [ 1 2 3 4 5 6 ] .-midlr	F41: Invalid left width: -1 in .-midlr
1 -1 [ 1 2 3 4 5 6 ] .-midlr	F41: Invalid right width: -1 in .-midlr

## [width array] .-right [array]

Routing: TOS

This method removes the last (rightmost) width elements from a copy of the array.

Notes:

- This method does *not* mutate the original array.
- Only non-negative widths are supported.

Code	Result
2 [ 1 2 3 4 5 6 ] .-right	[ 1 2 3 4 ]
-2 [ 1 2 3 4 5 6 ] .-right	F41: Invalid width: -2 in .-right

## [value index array] .[]! []

Routing: TOS

Store the specified value at the index of the array.

Notes:

- If the index is beyond the end of the array, the array is extended to encompass the new index. Cells between the previous last element and the new one are set to nil.
- Negative indexes access elements counting from the end of the array with -1 being the last element of the array.
- This method *does* mutate the array.

Code	Result
"Hello" 5 \$myarray .[]!	("Hello" is stored at location 5 of myarray.)
[ 1 2 3 ] val\$: \$t 5 5 \$t .[]! \$t	[ 1 2 3 nil nil 5 ]
5 -4 [ 1 2 3 ] .[]!	E05: index -4 too small for array; minimum: -3

## [index array] .[]@ [value]

Routing: TOS

Retrieve the value stored in the array at the specified index.

Notes:

- If the index does not correspond to a location within the array, the value nil is returned instead.
- Negative indexes access elements counting from the end of the array with -1 being the last element of the array.

Code	Result
1 [ 1 2 3 4 ] .[]@	2
11 [ 1 2 3 4 ] .[]@	nil
-1 [ 1 2 3 4 ] .[]@	4
-11 [ 1 2 3 4 ] .[]@	nil

### **[an\_array].each{{ ... }} [unspecified]**

Routing: NOS (since the Procedure Literal is TOS)

This method is the array item iterator. It processes each element of the array in turn, calling the embedded procedure literal block with the value (v) and index (x) of the current array item.

For more information on the methods local to the embedded procedure, see the Procedure class.

<b>Code</b>	<b>Result</b>
<pre>[ "1" "2" "3" "4" ] .each{ v x 1+ * . space }</pre>	(Prints out:) 1 22 333 4444
<pre>[ "1" "2" "3" "4" ] .each{ v . space }</pre>	(Prints out:) 1 2 3 4
<pre>[ "1" "2" "3" "4" ] .each{ x . space }</pre>	(Prints out:) 0 1 2 3

### **[an\_array].empty? [a\_boolean]**

Routing: TOS

Is the array argument devoid of data?

<b>Code</b>	<b>Result</b>
<pre>[ ] .empty?</pre>	true
<pre>[ 1 2 3 ] .empty?</pre>	false

### **[ d<sub>0</sub> .. d<sub>N</sub> N ].gather [[d<sub>0</sub> .. d<sub>N</sub>]]**

Routing: TOS

This method gathers up the top N elements of the stack and gathers them into an array. This is a helper method of the Integer class.

<b>Code</b>	<b>Result</b>
<pre>1 2 3 3 .gather</pre>	[ 1 2 3 ]
<pre>1 2 3 0 .gather</pre>	F30: Invalid .gather count value.
<pre>1 2 3 -12 .gather</pre>	F30: Invalid .gather count value.
<pre>1 2 3 4 .gather</pre>	F30: Data stack underflow.
<pre>1 2 3 "apple" .gather</pre>	F20: A String instance does not understand .gather (_274).

### **[a<sub>1</sub> a<sub>2</sub> ... a<sub>N</sub> N] .join [after]**

Routing: TOS

Join the top N stack elements into an array. If N is negative or there are fewer than N elements available, an error occurs.

This is a helper method of the Integer class.

Note: This method is deprecated, use `.gather` instead.

Code	Result
1 2 3 4 4 .join	[ 1 2 3 4 ]
1 2 3 4 -4 .join	F30: Invalid array size: .join
1 2 3 4 44 .join	F30: Data Stack Underflow: popm

### **[width array] .left [array]**

Routing: TOS

This method returns an array containing the first (leftmost) width elements of the given array.

Notes:

- This method does *not* mutate the original array.
- Only non-negative widths are supported.

Code	Result
3 [ 1 2 3 4 5 6 7 ] .left	[ 1 2 3 ]
-3 [ 1 2 3 4 5 6 7 ] .left	F41: Invalid width: -3 in .left

### **[array] .length [count]**

Routing: TOS

This method computes the number of elements contained in the given array.

Code	Result
[ 1 2 3 4 ] .length	4
[ ] .length	0



## **[an\_array] .map{{ ... }} [an\_array]**

Routing: NOS (since the Procedure Literal is TOS)

Construct a new array, applying the transformation block to each element. The `.map` method processes each element of the array in turn, calling the embedded procedure literal block with the value (`v`) and index (`x`) of the current array item. The value returned by the block is used to populate the new array. If no value is returned, an error occurs.

For more information on the methods local to the embedded procedure, see the Procedure class.

Note: This method does *not* mutate the original array.

Code	Result
<pre>[ "1" "2" "3" "4" ] .map{ v x 1+ * }</pre>	<pre>[ "1" "22" "333" "4444" ]</pre>
<pre>[ 1 2 3 4 ] .map{ v .odd? if v else 0 then }</pre>	<pre>[ 1 0 3 0 ]</pre>
<pre>[ 1 2 3 4 ] .map{ v .odd? if v then }</pre>	F30: Data Stack Underflow: pop
<pre>[ "1" "2" "3" "4" ] .map{ v 2 * }</pre>	<pre>[ "11" "22" "33" "44" ]</pre>
<pre>[ "1" "2" "3" "4" ] .map{ x 1+ 2* }</pre>	<pre>[ 2 4 6 8 ]</pre>

## **[array] .max [value]**

Routing: TOS

This method scans through the array searching for the element with the largest value. The type of the result will match the type of the first element of the array. If comparison with other values is not supported, an error is raised.

Code	Result
<pre>[ 1 6 2 3 4 5 ] .max</pre>	<pre>6</pre>
<pre>[ "1" 6 2 3 4 5 ] .max</pre>	<pre>"6"</pre>
<pre>[ 1 2 3 4 "apple" ] .max</pre>	F40: Cannot coerce a String instance to an Integer instance

## [posn width array] .mid [array]

Routing: TOS

This method extracts width elements from a copy of the array starting at position “posn”. If more elements are requested than exist in the array, only available elements are returned. If the start “posn” is not a valid element index, then the value nil is returned.

Notes:

- This method does *not* mutate the original array.
- Only non-negative positions and widths are supported.

Code	Result
2 2 [ 1 2 3 4 5 6 ] .mid	[ 3 4 ]
2 9 [ 1 2 3 4 5 6 ] .mid	[ 3 4 5 6 ]
9 2 [ 1 2 3 4 5 6 ] .mid	nil
-2 2 [ 1 2 3 4 5 6 ] .mid	F41: Invalid index: -2 in .mid
2 -2 [ 1 2 3 4 5 6 ] .mid	F41: Invalid width: -2 in .mid

## [left right array] .midlr [array]

Routing: TOS

This method extracts elements from the target array starting at position “left” and ending at position “right” counting from the end of the array. If the left and right are such that no elements are included, an empty array is returned. If the indexes are outside of the array, nil is returned.

Notes:

- This method does *not* mutate the original array.
- Only non-negative widths are supported.

Code	Result
1 1 [ 1 2 3 4 ] .midlr	[ 2 3 ]
3 3 [ 1 2 3 4 ] .midlr	[]
8 8 [ 1 2 3 4 ] .midlr	nil
-1 1 [ 1 2 3 4 ] .midlr	F41: Invalid left width: -1 in .midlr
1 -1 [ 1 2 3 4 ] .midlr	F41: Invalid right width: -1 in .midlr

## **[array] .min [value]**

Routing: TOS

This method scans through the array searching for the element with the smallest value. The type of the result will match the type of the first element of the array. If comparison with other values is not supported, an error is raised.

<b>Code</b>	<b>Result</b>
<code>[ 1 6 2 3 4 5 ] .min</code>	1
<code>[ "1" 6 2 3 4 5 ] .min</code>	"1"
<code>[ 1 2 3 4 "apple" ] .min</code>	F40: Cannot coerce a String instance to an Integer instance

## **[array] .pp []**

Routing: TOS

This method is a pretty printer for arrays. The data in the array is displayed with in columns for an 80 character wide display and a blank line every 50 lines. The primary use of this method was in preparing the lists of method names used in this guide. No value is returned.

<b>Code</b>	<b>Result</b>
<code>[ 1 2 3 4 5 ] .pp</code>	Displays "1 2 3 4 5"

## **[array] .reverse [array]**

Routing: TOS

This method creates a copy of the array with the elements reversed.

Note: This method does *not* mutate the original array.

<b>Code</b>	<b>Result</b>
<code>[ 1 2 3 4 ] .reverse</code>	<code>[ 4 3 2 1 ]</code>

### **[width array] .right [array]**

Routing: TOS

This method extracts the last (rightmost) width elements from a copy of the array.

Notes:

- This method does *not* mutate the original array.
- Only non-negative widths are supported.

Code	Result
2 [ 1 2 3 4 ] .right	[ 3 4 ]
-2 [ 1 2 3 4 ] .right	F41: Invalid width: -2 in .right

### **[[d<sub>0</sub> .. d<sub>N</sub>]] .scatter [d<sub>0</sub> .. d<sub>N</sub>]**

Routing: TOS

The contents of the array are scattered onto the data stack.

Code	Result
[ 1 2 3 4 ] .scatter	1 2 3 4

### **[an\_array] .select{{ ... }} [an\_array]**

Routing: NOS (since the Procedure Literal is TOS)

This method is used to select elements from an array and place them in a new array. If the embedded procedure literal block of the select returns true, the element is copied. If it returns false, the element is omitted. If no value is returned, an error occurs.

For more information on the methods local to the embedded procedure, see the Procedure class.

Note: This method does *not* mutate the original array.

Code	Result
[ 1 2 3 4 ] .select{ v even? }	[ 2 4 ]
[ 1 2 3 4 ] .select{ }	F30: Data Stack Underflow: pop
[ 1 2 3 4 ] .select{ v .odd? }	[ 1 3 ]
[ 1 2 3 4 ] .select{ x .odd? }	[ 2 4 ]

### **[array] .shuffle [array]**

Routing: TOS

This method creates a new array with the elements of the source array shuffled.

Note: This method does *not* mutate the original array.

<b>Code</b>	<b>Result</b>
<code>[ 1 2 3 4 5 6 7 8 9 ] .shuffle</code>	<code>[ 3 1 5 7 4 8 6 9 2 ]</code> (Typical result)

### **[an\_array] .split [the\_array\_elements]**

Routing: TOS

This method splits out the array, placing its elements onto the data stack.

Note: This method is deprecated, use `.scatter` instead.

<b>Code</b>	<b>Result</b>
<code>1 2 [ 3 4 ] .split</code>	<code>1 2 3 4</code>

### **[array] .sort [array]**

Routing: TOS

Given an array, return a sorted copy of that array. Note that the elements of the array must be comparison compatible or an error is returned.

Note: This method does *not* mutate the original array.

<b>Code</b>	<b>Result</b>
<code>[ 4 1 5 3 6 0 ] .sort</code>	<code>[ 0 1 3 4 5 6 ]</code>
<code>[ 4 1 5 3 "6" 0 ] .sort</code>	<code>[ 0 1 3 4 5 "6" ]</code>
<code>[ "5" 5 nil 4 ] .sort</code>	F12: A NilClass instance does not support <=>.
<code>[ 1 4 nil 7 ] .sort</code>	F40: Cannot coerce a NilClass instance to an Integer instance

### **[array] .strmax [width]**

Routing: TOS

Given an array, this method determines the width of the largest string representation of an element. This method is a helper method for the .pp pretty print method.

Note: This method does *not* mutate the original array.

Code	Result
<code>[ 1 100 3 44 ] .strmax</code>	3

### **[an\_array] .to\_duration [a\_duration]**

Routing: TOS

A helper method for the Duration class. See that class for more details.

### **[an\_array] .to\_duration! [a\_duration]**

Routing: TOS

A helper method for the Duration class. See that class for more details.

### **[an\_array] .to\_s [a\_string]**

Routing: TOS

Convert the array to a string representation of that array.

Code	Result
<code>[ 1 2 3 ] .to_s</code>	<code>"[ 1 2 3 ]"</code>

### **[an\_array] .to\_t [a\_time]**

Routing: TOS

Convert the array to a time object. This is a helper method for the Time class.

### **[an\_array] .to\_t! [a\_time]**

Routing: TOS

Convert the array to a time object. This is a helper method for the Time class.

### **[array object ] << [array]**

Routing: NOS

This method appends the object to the array. If the object is an array, the array and not the elements are appended.

NOTE: This method DOES mutate the source array.

<b>Code</b>	<b>Result</b>
[ 1 2 3 ] 4 <<	[ 1 2 3 4 ]
[ 1 2 3 ] [ 4 5 ] <<	[ 1 2 3 [ 4 5 ] ]

### **[array] @ [value]**

Routing: TOS

This method overrides the stub method defined in Object. The fetch data operator is normally used to fetch a value from a data reference. It happens to also work with arrays, but this is an edge case. When applied to an array, the value is fetched from the data element indexed by the value zero (0).

Note: This also happens to be the implementation of the “@” operator used with references in general. In that context, this method retrieves the value associated with a reference. In terms of classical FORTH, it retrieves the a value of a variable.

<b>Code</b>	<b>Result</b>
[ 1 2 3 4 ] @	1
myvar @	an_object

**[d<sub>0</sub> .. d<sub>N</sub>] gather [[d<sub>0</sub> .. d<sub>N</sub>]]**

Routing: VM

Gather up the contents of data stack into an array. This is a helper method of the Virtual Machine class.

<b>Code</b>	<b>Result</b>
gather	[]
1 2 3 gather	[ 1 2 3 ]



# Class

Inheritance: Class ← Object

```
Class Shared Methods =
)methods      .is_class?      .parent_class .to_s
)stubs        .new            .subclass:

Helper Methods =
.:            .class          .is_class?      :class
```

For all classes in fOOrth, shared methods defined on a class are expressed through instances of those classes. However, the Class class is the class of all classes. That is to say, all classes are instances of the class Class. The Class class is unique in that it is an instance of itself!<sup>60</sup> A consequence of this is that shared methods of the Class class are class methods of all classes including the Class class.

The shared methods of the Class class mostly deal with the creation of new classes, and populating those classes with the methods and data needed to accomplish useful work.

## ***Instance Methods***

**[a\_class] .: method\_name ... ; []**

Routing: VM

This method is used to define new methods for instances of the specified class as well as instances of any of its sub-classes. These methods execute with “self” set to the instance that received the message.

The text of the method name determines the type of method being created. The following rules apply to the first character of the name: A “.” indicates a public method, a “~” indicates a private method, “A” through “Z”, “@”, “\$”, or “#” are not allowed. All others indicate a dyadic operator with NOS routing.

See the section Routing above for more details.

---

<sup>60</sup> All in all, a real class act! See [http://en.wikipedia.org/wiki/Class\\_\(computer\\_programming\)](http://en.wikipedia.org/wiki/Class_(computer_programming))

Code	Result
<code>Object .: .one 1 ;</code>	(Creates a public method .one)
<code>Object .: ~two 2 ;</code>	(Creates a private method ~two)
<code>MyClass .: + (omitted) ;</code>	(Creates a dyadic (NOS) method +)
<code>Object .: BAD ;</code>	F10: Invalid name for a method: BAD
<code>String .: twaddle" (stuff) ;</code>	(Creates a method with an embedded string.
<code>55 .: foobar (stuff) ;</code>	F13: The target of .: must be a class
<code>Object .: twiddle" (stuff) ;</code>	F13: Creating a string method twiddle" on a Object
<b>Local Methods:</b>	
<p><b><i>[undefined] super [undefined]</i></b></p> <p>Routing: Compiler Context.</p> <p>Invoke the definition of this method in the nearest parent class of this class that defines a method of the same name. The arguments to the super method must match those of the parent class's implementation of this method. The return values will also be those of the parent class. If no parent class defines a method of the same name as this one, an error is generated.</p>	
Code	Result
<code>class MyClass MyClass .: .name "Hi from " super + ; MyClass .new .name .</code>	Hi from MyClass instance
<code>class TestClass TestClass .: .broken super ; TestClass .new .broken</code>	F20: A TestClass instance does not understand .broken (:_309).
<p><b><i>[value] val: local_name []</i></b></p> <p>Routing: Compiler Context.</p> <p>This method defines a local value in the current method.</p> <p>See Data Storage in fOOrth, above, for more details on values and variables.</p>	
Code	Result
<code>10 val: limit</code>	(Creates a value named limit set to 10)

***[value] var: local\_name []***

Routing: Compiler Context.

This method defines a local variable in the current method.

See Data Storage in fOOrth, above, for more details on values and variables.

Code	Result
10 var: limit	(Creates a variable named limit set to 10)

***[value] val@: @instance\_name []***

Routing: Compiler Context.

This method creates an instance value in the instance of the host class.

See Data Storage in fOOrth, above, for more details on values and variables.

Code	Result
10 val@: @limit	(Creates an instance value named @limit set to 10)

***[value] var@: @instance\_name []***

Routing: Compiler Context.

This method creates an instance value in the instance of the host class.

See Data Storage in fOOrth, above, for more details on values and variables.

Code	Result
10 var@: @limit	(Creates an instance variable named @limit initially set to 10)

***[] ... ; []***

Routing: Compiler Context.

Close off the method definition.

***[a\_class] .is\_class? [true]***

Routing: TOS

This method answers true when sent to a class object because classes are classes!

Code	Result
Object .is_class?	true

### [unspecified a\_class] .new [an\_instance\_of\_a\_class]

Routing: TOS

Create a new instance of the target class. When the instance of the class is created, the .init method is called on that instance. The unspecified arguments listed above, are the optional arguments to this .init method. The class Object defines a default implementation of the .init method that uses no arguments and takes to no action.

Code	Result
Object .new	an_object_instance

### [a\_class] .parent\_class [a\_class or nil]

Routing: TOS

Get the parent class of the given class. If there is no parent class (as is the case for the Object class) then return nil.

Code	Result
Complex .parent_class	Numeric class
Object .parent_class	nil

### [a\_class] .subclass: subclass\_name []

Routing: VM

Create a subclass of the given class. The name of the new class must conform to the follow regex:

```
/^[A-Z][A-Za-z0-9]+$/
```

This means the the name must start with an upper case letter followed by zero or more upper and lower case letters or digits. Note the underscores “\_” are not allowed.

This is a helper method of the virtual machine.

Code	Result
Object .subclass: MyClass	(Creates the class MyClass, a subclass of Object)
Object .subclass: wrong	F10: Invalid class name wrong

## **[a\_class] .to\_s [string]**

Routing: TOS

Converts the class to a string.

<b>Code</b>	<b>Result</b>
<code>Object .to_s</code>	"Object"
<code>class: MyClass MyClass .to_s</code>	"MyClass"

## **[] class: class\_name []**

Routing: VM

This virtual machine helper method is a shortcut for creating new classes. The expression

```
class: MyClass
```

is equivalent to

```
Object .subclass MyClass.
```

The name of the new class must conform to the follow regex:

```
/^[A-Z][A-Za-z0-9]+$/
```

This means the the name must start with an upper case letter followed by one or more upper and lower case letters or digits. Note the underscores “\_” are not allowed.

<b>Code</b>	<b>Result</b>
<code>class: MyClass</code>	(Creates the class MyClass, a subclass of Object)
<code>class: wrong</code>	F10: Invalid class name wrong

## Commands

The following are also methods, however, they are designed primarily for interacting directly with the operator in the form of commands. Commands are distinguished by the leading “)” in their name<sup>61</sup>.

### [a\_class] )methods []

Routing: TOS

List the active methods defined for this class. Stubs are *not* included in this listing.

#### >Object )methods

Object Shared Methods =

&&	.init	.to_i!	.to_x!	min
)methods	.is_class?	.to_n	<>	nil<>
.	.name	.to_n!	=	nil=
.class	.strlen	.to_r	^^	not
.clone	.to_f	.to_r!	distinct?	
.clone_exclude	.to_f!	.to_s	identical?	
.copy	.to_i	.to_x	max	

### [a\_class] )stubs []

Routing: TOS

List the stub methods defined for this class. Stubs are place holder methods that serve one of two purposes:

1. They are abstract methods in a base class that exist so that a sub-class may replace the stub with an actual method. The stub ensures that the compiler uses the correct routing when using the method.
2. They are sentries for methods in a base class that are not valid to be performed on a particular sub-class. For example, many methods of the Numeric class are not valid in its sub-class Complex.

#### >Object )stubs

Object Shared Stubs =

!	+	0<=	0>	2*	<	>	and	or
)stubs	-	0<=>	0>=	2+	<<	>=	com	xor
*	/	0<>	1+	2-	<=	>>	mod	
**	0<	0=	1-	2/	<=>	@	neg	

<sup>61</sup> This convention is a throwback and homage to the command syntax of the APL language on the old PDP-10.

## Complex

Inheritance: Complex ← Numeric ← Object

```
Complex Shared Methods =
.cbrt .e** .split .sqrt

Helper Methods =
.to_x .to_x! complex

Complex Shared Stubs =
.ceil .rationalize_to .to_t! <=> mod
.emit .round < >
.floor .to_t <= >=
```

A complex number<sup>62</sup> is a number expressed in the form  $a+bi$ , where  $a$  and  $b$  are real numbers and  $i$  is the square root of  $-1$ . Like other sub-classes of the Numeric class, the Complex class inherits most of its functionality from its parent class. There is one major area where this does not apply. All other Numeric sub-classes are magnitudes. As magnitudes, they may be compared for greater than, less than, etc. While Complex numbers contain magnitudes (accessed via the `.magnitude` method) they are NOT themselves magnitudes. Thus comparison operations (other than equality or inequality) and many other types of operations are not valid for Complex values.

### Complex Literals

Complex literals are supported directly by the compiler. Any number ending in 'i' is considered to be a complex number. The regular expression detecting potential complex numbers is:

```
/\di$/
```

Some example values follow:

Literal <sup>63</sup>	Value <sup>64</sup>
7i	0+7i
-7i	0-7i
3.7i	0+3.7i
1/2i	0+1/2i
-3-7i	-3-7i
3+7i	3+7i

<sup>62</sup> See [http://en.wikipedia.org/wiki/Complex\\_number](http://en.wikipedia.org/wiki/Complex_number)

<sup>63</sup> No spaces are permitted within the literal.

<sup>64</sup> The real and imaginary parts may be integers, floats or rational numbers. See the respective sections for more details on those types of literals.

## Instance Methods

**[a\_complex] .cbrt [a\_complex<sup>1/3</sup>]**

**Routing:** TOS.

Find the cube root of the complex numeric value.

Code	Result
8+0i .cbrt	2.0+0.0i

**[a\_complex] .e\*\* [e<sup>a\_complex</sup>]**

**Routing:** TOS.

Compute the value of e raised to the power of the complex numeric value.

Code	Result
1+1i .e**	1.4686939399158851+2.2873552871788423i

**[a\_complex] .split [real\_part imaginary\_part]**

**Routing:** TOS.

Split a complex number into its two component parts.

Code	Result
3+4i .split	3, 4

**[a\_complex] .sqrt [a\_complex<sup>1/2</sup>]**

**Routing:** TOS.

Find the square root of the complex numeric value.

Code	Result
2+2i .sqrt	1.5537739740300374+0.6435942529055827i



**[an\_object] .to\_x [a\_complex or nil]****Routing:** TOS

This is a helper method of the Object class. Try to convert the object into a Complex. If this is not possible, return nil. Contrast with `.to_x!`

Code	Result
<code>5 .to_x</code>	<code>5+0i</code>
<code>5.2 .to_x</code>	<code>5.2+0i</code>
<code>"5" .to_x</code>	<code>5+0i</code>
<code>1+2i .to_x</code>	<code>1+2i</code>
<code>"apple" .to_x</code>	<code>nil</code>

**[an\_object] .to\_x! [a\_complex]****Routing:** TOS

This is a helper method of the Object class. Try to convert the object into a Complex. If this is not possible, raise an error. Contrast with `.to_x`

Code	Result
<code>5 .to_x!</code>	<code>5+0i</code>
<code>5.2 .to_x!</code>	<code>5.2+0i</code>
<code>"5" .to_x!</code>	<code>5+0i</code>
<code>1+2i .to_x!</code>	<code>1+2i</code>
<code>"apple" .to_x!</code>	<code>Cannot convert a String instance to a Complex instance</code>

**[real\_part imaginary\_part] complex [a\_complex]****Routing:** VM

This is a helper method of the Virtual Machine class. Given two numbers, create a complex number. If this cannot be done, an error occurs.

Code	Result
<code>4 5 complex</code>	<code>4+5i</code>
<code>"apple" 5 complex</code>	<code>F40: Cannot coerce a String instance, Fixnum instance to a Complex</code>

## ***Instance Stubs***

A number of methods are stubbed out in the Complex class. All of them are invalid operations because Complex numbers are not magnitudes. These stubbed out methods are:

<code>.ceil</code>	<code>.rationalize_to</code>	<code>.to_t!</code>	<code>&lt;=&gt;</code>	<code>mod</code>
<code>.emit</code>	<code>.round</code>	<code>&lt;</code>	<code>&gt;</code>	
<code>.floor</code>	<code>.to_t</code>	<code>&lt;=</code>	<code>&gt;=</code>	

## Duration

Inheritance: Duration ← Object

```
.intervals .labels

Duration Shared Methods =
*           .as_years           .to_duration           2+
+           .days              .to_duration!          2-
-           .hours              .to_s                  2/
.as_days   .largest_interval   .years                  f"
.as_hours  .minutes            /                       format
.as_minutes .months            1+
.as_months .seconds            1-
.as_seconds .to_a              2*
```

```
Duration Helper Methods =
a_day      a_minute      a_month      a_second      a_year      an_hour

Duration Class Stubs =
.new
```

The Duration class is used to represent a *span* of time. This contrasts with the Time class which represents *points* in time. An analogy can be taken from tennis. The time objects are like the posts on either side of the court, and the duration is like the net spanning the distance between them. Thus when one time value is subtracted from another, the result is the duration, or span of time, between them. This distinction means that Duration objects are different from Time objects in a number of ways:

Firstly: With a time value, the length, in days of a year or month depends on which year or month it is. For example the year 2000 was 366 days long while the year 2001 was 365 days long. With durations this is not the case. Here, years and months cannot be related to any specific year or month, rather they must be tied to a hypothetical *average*<sup>65</sup> year or month. Thus for the Duration class:

1 *year* is 365.2425 days or 365 days, 5 hours, 49 minutes, and 12.0 seconds.

1 *month* is 30.436875 days or 30 days, 10 hours, 29 minutes, and 6.0 seconds.

The definition of days, hours, minutes and seconds exhibit no such complexity<sup>66</sup>.

Secondly: When formatting a Time, it is typical to convert months into named months, and days of the week into their name. Since durations are not tied to specific points of time, in a Duration, we only reference the number of months and days, etc. Thus Duration objects have their own formatting specification (see Duration Formatting below).

---

<sup>65</sup> These averages are based on the Gregorian Calendar. See [https://en.wikipedia.org/wiki/Gregorian\\_calendar](https://en.wikipedia.org/wiki/Gregorian_calendar)

<sup>66</sup> For now at least, we ignore anomalies like “leap seconds” that are added on various occasions by the Time Lords or some such temporal authorities.

In many ways, Duration objects are also like Numeric data. There will be many cases where we will need to compute durations, count them down etc. Thus the Duration class acts like a Numeric object and can be used in computations. There are however two noteworthy points:

- The Duration class has direct support for only a subset of arithmetic operators: + - \* /. For other operations, fear not, the duration is automatically converted into a rational number. If a Duration result is required, the `.to_duration` method (see below) can be applied to the result.

Code	Result
<code>a_minute 5 * .class</code>	Duration
<code>a_minute .sqr .class</code>	Rational

- The order of operands matters. Dyadic operators (like +) “bind” to the type of the left most operand. Thus in the example below, the results have different data types. Again, the `.to_duration` method (see below) can be applied to the result.

Code	Result
<code>a_minute 12 + .class</code>	Duration
<code>12 a_minute + .class</code>	Fixnum <sup>67</sup>

Note: If in doubt, the `.to_duration` method (see below) can be safely applied to a duration value with no ill effects and very little time or effort.

## Creating Duration Values

Duration objects are not created in the typical fashion. In fact the standard object creating method, `.new` is stubbed out and not available. None-the-less there are several ways to create Duration objects:

- The difference of two time objects is a Duration equal to the span of time between them.
- The predefined methods `a_day`, `a_minute`, etc create Duration objects with the appropriate span value. See special duration values below for more details.
- The `.to_duration` method allows a simple number to be converted into a Duration with a span set to the number of seconds of the number.
- The `.to_duration` method also works with an array of numbers. These values are interpreted as [ years months days hours minutes seconds ]. If fewer than six data are present, leading values are assumed to be zero. So the following are equivalent:

```
[ 1 ] .to_duration
[ 0 0 0 0 0 1 ] .to_duration.
```

---

<sup>67</sup> Conversion to another type can have other side-effects. For example, conversion to Fixnum could result in the loss of the fractions of seconds of the original duration. Similarly, conversion to a float can also result in loss of accuracy.

## Special Duration Values

### [] a\_day [a\_duration]

Routing: VM

Push a duration with a span of a day onto the stack.

Code	Result
a_day	Duration instance <86400.0 seconds>

### [] a\_minute [a\_duration]

Routing: VM

Push a duration with a span of a minute onto the stack.

Code	Result
a_minute	Duration instance <60.0 seconds>

### [] a\_month [a\_duration]

Routing: VM

Push a duration with the average span of a month onto the stack.

Code	Result
a_month	Duration instance <2629746.0 seconds>

### [] a\_second [a\_duration]

Routing: VM

Push a duration with a span of a second onto the stack.

Code	Result
a_second	Duration instance <1.0 seconds>

## **[] a\_year [a\_duration]**

Routing: VM

Push a duration with the average span of a year onto the stack.

<b>Code</b>	<b>Result</b>
a_year	Duration instance <31556952.0 seconds>

## **[] an\_hour [a\_duration]**

Routing: VM

Push a duration with a span of an hour onto the stack.

<b>Code</b>	<b>Result</b>
an_hour	Duration instance <3600.0 seconds>

## ***Duration Formatting***

The formatting facility for Duration objects is derived from the facilities of the Ruby `format_engine` gem<sup>68</sup>. A format string is a string with optional text and zero or more format sequences. The structure of a format sequence is shown below with elements in brackets representing optional components.

```
%[flags][sign][width][.precision]type
```

The type parameter is a single character that describes the data within the duration being formatted. The following are supported:

### **Component Format Types**

<b>Type</b>	<b>Format Description</b>
d	Whole days in the month.
D	Total (with fractional) days.
h	Whole hours in the day.
H	Total (with fractional) hours.
m	Whole minutes in the hour.
M	Total (with fractional) minutes.
o	Whole months in the year.
O	Total (with fractional) months.

<sup>68</sup> For more details please see: [https://rubygems.org/gems/format\\_engine](https://rubygems.org/gems/format_engine)

Type	Format Description
s	Total (with fractional) seconds in the minute.
S	Total (with fractional) seconds.
y	Whole years.
Y	Total (with fractional) years.

Note: Formats with a “whole” attribute do not support the precision option. Formats with a “fractional” attribute, default to six digits of precision.

### Other Format Types

Type	Format Description
B	Brief summary format. The total (with fractional) of the largest, non-zero time unit.
f	Raw float format. Total seconds in floating point format.
r	Raw rational format. Total seconds in rational format.

Note: Currently f and r formats do not have label support (See the \$ option below)

### Format Sign

Type	Format Description
+	(The default) The output is right justified within the format width.
-	The output is left justified within the format width.

### Format Flags

Type	Format Description
?	Suppress output if the value, or the value for this label (see \$ below) is zero.
\$	Output the text label appropriate for the value. For example whereas %y outputs the year, %\$y outputs the text “years” (or “year” if there is exactly one year in the duration object being formatted).

Note: If both the ? and \$ options are used, the ? flag must come first in the format string.

## Examples

The examples that follow all use the f"format string" method instead of the "format string" format method. The first form is shorter, and often clearer. The second form must be used when it is desired to compute or lookup the format string.

This batch of formats are demonstrated with the shared input of "123456 .to\_duration". This common input is not shown for brevity.

Code	Result
f"About %4.1B%\$B"	"About 1.4 days"
f"%d %h %1.0s"	"1 10 36"
f"%d%\$d %h%\$h %s%\$s"	"1 day 10 hours 36.000000 seconds"
f"%d%\$d %h%\$h %1.0s%\$s"	"1 day 10 hours 36 seconds"
f"%d%\$d %h%\$h %3.1s%\$s"	"1 day 10 hours 36.0 seconds"
f"%3.1D%\$D"	"1.4 days"
f"%3.1H%\$H"	"34.3 hours"
f"%3.1M%\$M"	"2057.6 minutes"
f"%3.1S%\$S"	"123456.0 seconds"
f"%r"	"123456/1"
.to_s	"Duration instance <123456.0 seconds>"

## Class Methods

### [Duration] .intervals [an\_array]

Routing: TOS

Push an array of durations onto the stack. This array contains durations corresponding to a year, a month, a day, an hour, a minute, and a second.

Code	Result
Duration .intervals	[ Duration instance <31556952.0 seconds> Duration instance <2629746.0 seconds> Duration instance <86400.0 seconds> Duration instance <3600.0 seconds> Duration instance <60.0 seconds> Duration instance <1.0 seconds> ]



### **[Duration] .labels [an\_array]**

Routing: TOS

Push an array of interval labels onto the stack. These correspond to a year, a month, a day, an hour, a minute, and a second.

<b>Code</b>	<b>Result</b>
<code>Duration .labels</code>	[ "years" "months" "days" "hours" "minutes" "seconds" ]

## ***Instance Methods***

### **[a\_duration a\_duration or a\_number] \* [a\_duration]**

Routing: NOS

This is the multiplication operator for the Duration class.

<b>Code</b>	<b>Result</b>
<code>a_minute 5 *</code>	Duration instance <300.0 seconds>

### **[a\_duration a\_duration or a\_number] + [a\_duration]**

Routing: NOS

This is the addition operator for the Duration class.

<b>Code</b>	<b>Result</b>
<code>a_minute 5 +</code>	Duration instance <65.0 seconds>

### **[a\_duration a\_duration or a\_number] - [a\_duration]**

Routing: NOS

This is the subtraction operator for the Duration class.

<b>Code</b>	<b>Result</b>
<code>a_minute 5 -</code>	Duration instance <55.0 seconds>

**[a\_duration] .as\_days [a\_float]**

Routing: TOS

Convert a duration to a float representing the number of days (including fractions) in the span.

Code	Result
a_month .as_days f"%4.2f"	"30.44"
500000 .to_duration .as_days f"%4.2f"	"5.79"

**[a\_duration] .as\_hours [a\_float]**

Routing: TOS

Convert a duration to a float representing the number of hours (including fractions) in the span.

Code	Result
a_day .as_hours f"%4.2f"	"24.00"
500000 .to_duration .as_hours f"%4.2f"	"138.89"

**[a\_duration] .as\_minutes [a\_float]**

Routing: TOS

Convert a duration to a float representing the number of minutes (including fractions) in the span.

Code	Result
an_hour .as_minutes f"%4.2f"	"60.00"
50000 .to_duration .as_minutes f"%4.2f"	"833.33"

**[a\_duration] .as\_months [a\_float]**

Routing: TOS

Convert a duration to a float representing the number of months (including fractions) in the span.

Code	Result
a_year 3 * .as_months f"%4.2f"	"36.00"
50000 .to_duration .as_months f"%4.2f"	"0.0190"

**[a\_duration] .as\_seconds [a\_float]**

Routing: TOS

Convert a duration to a float representing the number of seconds (including fractions) in the span.

Code	Result
a_day 11.0 / .as_seconds f"%4.2f"	"7854.55"
50000 .to_duration .as_seconds f"%4.2f"	"50000.00"

**[a\_duration] .as\_years [a\_float]**

Routing: TOS

Convert a duration to a float representing the number of years (including fractions) in the span.

Code	Result
a_year pi * .as_years f"%6.4"	"3.1416"
3.0E9 .to_duration .as_years f"%4.2f"	"95.07"

**[a\_duration] .days [an\_integer]**

Routing: TOS

Extract the number of whole days within the month of the duration's span.

Code	Result
a_day 40 * .days	9
50000 .to_duration .days	0

**[a\_duration] .hours [an\_integer]**

Routing: TOS

Extract the number of whole hours within the day of the duration's span.

Code	Result
an_hour 40 * .hours	16
50000 .to_duration .hours	13

### [a\_duration] .largest\_interval [0..5]

Routing: TOS

Return the index of the largest non-zero interval unit within the span of the duration. This is zero for years, one for months, two for days, three for hours, four for minutes, and five for seconds. These index values correspond to the indexes for these intervals in the Duration class methods ".intervals" and ".labels" (see above).

Note: if the span is less than one second, an index of five is returned for the fractions of seconds in the span.

Code	Result
a_year .largest_interval	0
a_month .largest_interval	1
a_day .largest_interval	2
an_hour .largest_interval	3
a_minute .largest_interval	4
a_second .largest_interval	5
0 .to_duration .largest_interval	5

### [a\_duration] .minutes [an\_integer]

Routing: TOS

Extract the number of whole minutes within the hour of the duration's span.

Code	Result
an_hour 1- .minutes	59
50000 .to_duration .minutes	53

### [a\_duration] .months [an\_integer]

Routing: TOS

Extract the number of whole months within the year of the duration's span.

Code	Result
a_month 16 * .months	4
1.0E7 .to_duration .months	3

### **[a\_duration] .seconds [a\_float]**

Routing: TOS

Extract the number of seconds (with fractions) within the minute of the duration's span.

<b>Code</b>	<b>Result</b>
<code>pi 20 * .to_duration .seconds</code>	2.8318530717958623
<code>50000 .to_duration .seconds</code>	20.0

### **[a\_duration] .to\_a [an\_array]**

Routing: TOS

Convert the duration into an array where the elements represent the years, months, days, hours, minutes, and seconds of the duration's span. These are all integers except for the seconds which is a float.

<b>Code</b>	<b>Result</b>
<code>a_year 2* 1- .to_a</code>	[ 1 11 30 10 29 5.0 ]
<code>50000 .to_duration .to_a</code>	[ 0 0 0 13 53 20.0 ]
<code>pi .to_duration .to_a</code>	[ 0 0 0 0 0 3.141592653589793 ]

### **[a\_duration or a\_number or an\_array] .to\_duration [a\_duration or nil]**

Routing: TOS

This method is a composite of a method and some helpers. Together they implement a protocol for converting data into Duration instances. If the conversion is unable to proceed, the value nil is returned instead of a duration.

<b>Code</b>	<b>Result</b>
<code>50000 .to_duration</code>	Duration instance <50000.0 seconds>
<code>an_hour .to_duration</code>	Duration instance <3600.0 seconds>
<code>[ 50000 ] .to_duration</code>	Duration instance <50000.0 seconds>
<code>[ 1 2 3 4 5 6 ] .to_duration</code>	Duration instance <37090350.0 seconds>
<code>[ 1 2 3 4 5 6 7 ] .to_duration</code>	nil
<code>"apple" .to_duration</code>	nil
<code>3+4i .to_duration</code>	nil

## [a\_duration or a\_number or an\_array] .to\_duration! [a\_duration]

Routing: TOS

This method is a composite of a method and some helpers. Together they implement a protocol for converting data into Duration instances. If the conversion is unable to proceed, an error is raised.

Code	Result
50000 .to_duration!	Duration instance <50000.0 seconds>
an_hour .to_duration!	Duration instance <3600.0 seconds>
[ 50000 ] .to_duration!	Duration instance <50000.0 seconds>
[ 1 2 3 4 5 6 ] .to_duration!	Duration instance <37090350.0 seconds>
[ 1 2 3 4 5 6 7 ] .to_duration!	F40: Cannot convert Array instance to a Duration instance
"apple" .to_duration!	F40: Cannot convert String instance to a Duration instance
3+4i .to_duration!	F40: Cannot convert Complex instance to a Duration instance

## [a\_duration] .to\_s [a\_string]

Routing: TOS

The default conversion to string. Mostly for debugging etc.

Code	Result
an_hour .to_s	"Duration instance <3600.0 seconds>"

## [a\_duration] .years [an\_integer]

Routing: TOS

Extract the number of whole years within the year of the duration's span.

Code	Result
a_year 3/2 * .years	1
50000 .to_duration .years	0

**[a\_duration a\_duration or a\_number] / [a\_duration]**

Routing: NOS

This is the division operator for the Duration class.

Code	Result
<code>a_year 2 / .to_a</code>	<code>[0 6 0 0 0 0.0]</code>

**[a\_duration] 1+ [a\_duration]**

Routing: TOS

Add one second to the duration. Note: This method does *not* mutate the original duration.

Code	Result
<code>a_minute 1+</code>	Duration instance <61.0 seconds>

**[a\_duration] 1- [a\_duration]**

Routing: TOS

Subtract one second from the duration. Note: This method does *not* mutate the original duration.

Code	Result
<code>a_minute 1-</code>	Duration instance <59.0 seconds>

**[a\_duration] 2\* [a\_duration]**

Routing: TOS

Double the span of the duration. Note: This method does *not* mutate the original duration.

Code	Result
<code>a_minute 2*</code>	Duration instance <120.0 seconds>

### **[a\_duration] 2+ [a\_duration]**

Routing: TOS

Add two seconds to the duration. Note: This method does *not* mutate the original duration.

<b>Code</b>	<b>Result</b>
<code>a_minute 2+</code>	Duration instance <62.0 seconds>

### **[a\_duration] 2- [a\_duration]**

Routing: TOS

Subtract two seconds from the duration. Note: This method does *not* mutate the original duration.

<b>Code</b>	<b>Result</b>
<code>a_minute 2-</code>	Duration instance <58.0 seconds>

### **[a\_duration] 2/ [a\_duration]**

Routing: TOS

Halve the span of the duration. Note: This method does *not* mutate the original duration.

<b>Code</b>	<b>Result</b>
<code>a_minute 2/</code>	Duration instance <30.0 seconds>

### **[a\_duration] f" a format string" [a\_string]**

Routing: NOS

The duration short form formatted conversion to a string. See Duration Formatting above for more details.

### **[a\_duration a\_string] format [a\_string]**

Routing: NOS

The duration long form formatted conversion to a string. See Duration Formatting above for more details.



## FalseClass

Inheritance: FalseClass ← Object

```
FalseClass Shared Methods =
  &&      ^ ^      not      ||

Helper Methods =
  false
```

The FalseClass is the class behind the value false. The value false is used to process a number of Boolean oriented operations. The NilClass serves as a surrogate false value and duplicates the functionality of false.

### **FalseClass Literals**

Instances of the class FalseClass are available through the Virtual Machine helper method “false”.

### **Instance Methods**

**[false object] && [false]**

**Routing:** NOS.

Logical AND for the case where the first operand is false. Always false.

Note: Other parts of this method are implemented in the Object and NilClass classes.

Code	Result
false false &&	false
false true &&	false
true false &&	false
true true &&	true

### **[false object] ^^ [true or false]**

**Routing:** NOS.

Logical, exclusive OR for the case where the first operand is false. This takes on the value of the second operand converted to a Boolean value.

Note: Other parts of this method are implemented in the Object and NilClass classes.

<b>Code</b>	<b>Result</b>
false false ^^	false
false true ^^	true
true false ^^	true
true true ^^	false

### **[false object] || [true or false]**

**Routing:** NOS.

Logical, inclusive OR for the case where the first operand is false. This takes on the value of the second operand converted to a Boolean value.

Note: Other parts of this method are implemented in the Object and NilClass classes.

<b>Code</b>	<b>Result</b>
false false	false
false true	true
true false	true
true true	true

# Float

Inheritance: Float ← Numeric ← Object

```
Float Shared Methods =  
.to_r .to_r!  
  
Helper Methods =  
.to_f .to_f!
```

Float<sup>69</sup> or floating point data are an approximation of the mathematical set of Real numbers. In fact, this approximation is based on the IEEE-754<sup>70</sup> Double Precision data type. The Float class inherits its functionality from the Numeric class.

## Float Literals

Like other numeric literals, float literals are implemented directly by the parser. Any number with an embedded '.' is considered to be a float. The regular expression that detects potential float point numbers is:

```
/\d\.\d/
```

Some example values follow:

Literal <sup>71</sup>	Value
7.0	7.0
7.0E3	7000.0
7.0E-3	0.007
-7.0	-7.0
-7.0E3	-7000.0
-7.0E-3	-0.007

<sup>69</sup> See [http://en.wikipedia.org/wiki/Floating\\_point](http://en.wikipedia.org/wiki/Floating_point)

<sup>70</sup> See [http://en.wikipedia.org/wiki/IEEE\\_floating\\_point](http://en.wikipedia.org/wiki/IEEE_floating_point)

<sup>71</sup> No spaces are permitted within the literal.

## Instance Methods

### [an\_object] .to\_f [a\_float or nil]

**Routing:** TOS

Try to convert the object to a float. If this is not possible, return nil. Contrast with .to\_f! This is a helper method of the Object class.

Code	Result
"43.1" .to_f	43.1
99 .to_f	99.0
"apple" .to_f	nil

### [an\_object] .to\_f! [a\_float]

**Routing:** TOS

Try to convert the object to a float. If this is not possible raise an error. Contrast with .to\_f This is a helper method of the Object class.

Code	Result
"43.1" .to_f!	43.1
99 .to_f!	99.0
"apple" .to_f!	Cannot coerce a String instance to a Float instance

### [a\_float] .to\_r [a\_rational or nil]

**Routing:** TOS

Try to convert the float into a Rational. If this is not possible, return nil. Contrast with .to\_r! This method replaces the default implementation in the Object class to produce better results for floating point data.

Code	Result
2.5 .to_r	5/2
1.3 .to_r	13/10
infinity .to_r	nil

**[a\_float] .to\_r! [a\_rational]****Routing:** TOS

Try to convert the float into a Rational. If this is not possible, raise an error. Contrast with `.to_r!`  
This method replaces the default implementation in the Object class to produce better results for floating point data.

<b>Code</b>	<b>Result</b>
<code>2.5 .to_r!</code>	<code>5/2</code>
<code>1.3 .to_r!</code>	<code>13/10</code>
<code>infinity .to_r!</code>	<code>Cannot convert a Float instance to a Rational instance</code>



# Hash

Inheritance: Hash ← Object

```
>Hash )methods
Hash Shared Methods =
.[[]!      .each{{ .keys .pp      .to_s
.[[]@      .empty? .length .strmax2 .values

Helper Methods =
{
```

Hash<sup>72</sup> objects are collections of data indexed by a value. This can be a number, a string or any other sort of value. The fOOrth language system supports the creation of hash literals and has several methods for putting data into and pulling data out of hashes.

## Hash Literals

Hash literals are supported by the virtual machine method “{” and the locally defined methods “->” and “}”. The general usage is:

```
{ (key/value generating code goes here) }
```

Where the data generation code is code that deposits zero or more key value pairs onto the stack. The opening “{” creates an empty hash. The “->” method takes a key and a value from the stack and adds this key/value pair to the hash. When the closing “}” is encountered, the operation is wrapped up. Here are some illustrations of hash literals in action:

```
>{ } .
{ }
>{ 1 2 -> 2 3 -> 3 5 -> 4 7 -> 5 11 -> } .
{ 1 2 -> 2 3 -> 3 5 -> 4 7 -> 5 11 -> }
```

Some points of interest:

- The first example creates an “empty” hash with zero data elements.
- Hash key and data do NOT need to be the same “type” of data. Mixing is allowed.
- Any statements that generate key/data pairs are permitted. Consider:

```
>{ 0 10 do i i -> loop } .
{ 0 0 -> 1 1 -> 2 2 -> 3 3 -> 4 4 -> 5 5 -> 6 6 -> 7 7 -> 8 8 -> 9 9 -> }
>{ 0 10 do i i dup * -> loop } .
{ 0 0 -> 1 1 -> 2 4 -> 3 9 -> 4 16 -> 5 25 -> 6 36 -> 7 49 -> 8 64 -> 9 81 -> }
```

---

<sup>72</sup> Please see [http://en.wikipedia.org/wiki/Hash\\_table](http://en.wikipedia.org/wiki/Hash_table) for more information.

## Hash Literal Methods

<p><b>[] { [a_hash]</b>  Routing: VM  This method begins the creation of a hash literal value.</p>	
<b>Code</b>	<b>Result</b>
{	}
<p><b>Local Methods:</b></p>	
<p><b>[a_hash a_key a_value] -&gt; [a_hash]</b>  Routing: Compiler Context.  This method takes a key and a value and adds it to the hash.</p>	
<b>Code</b>	<b>Result</b>
{ "a" 1 ->	{"a"=>1}
<p><b>[a_hash] ... } [a_hash]</b>  Routing: Compiler Context.  This method closes off the context of the hash literal creation.</p>	
<b>Code</b>	<b>Result</b>
{ "a" 1 -> }	{"a"=>1}

## Hash Literals in Action

The following shows the action of the code `1 2 { 3 4 -> 5 6 -> }` with `)show` and `)debug` active:

```
>1 2
Tags=[:numeric] Code="vm.push(1); "
Tags=[:numeric] Code="vm.push(2); "

[ 1 2 ]
>f
Tags=[:immediate] Code="vm._224(vm); "
  nest_context
  Code="vm.push(Hash.new); "

[ 1 2 { } ]
>>3 4 ->
Tags=[:numeric] Code="vm.push(3); "
Tags=[:numeric] Code="vm.push(4); "
```



```

Tags=[:immediate] Code="vm.context[:_315].does.call(vm); "
  Code="vm.add_to_hash; "

[ 1 2 { 3 4 -> } ]
>>5 6 ->
Tags=[:numeric] Code="vm.push(5); "
Tags=[:numeric] Code="vm.push(6); "
Tags=[:immediate] Code="vm.context[:_315].does.call(vm); "
  Code="vm.add_to_hash; "

[ 1 2 { 3 4 -> 5 6 -> } ]
>>1
Tags=[:immediate] Code="vm.context[:_316].does.call(vm); "
  unnest_context
  Code=""

[ 1 2 { 3 4 -> 5 6 -> } ]

```

## Instance Methods

### [value index hash] .[]! []

Routing: TOS

Store the specified value at the index of the hash.

Note: This method *does* mutate the hash.

Code	Result
"Hello" 5 \$myhash .[]!	("Hello" is stored with key 5 in myhash.)

### [index hash] .[]@ [value]

Routing: TOS

Retrieve the value stored in the hash at the specified index. If the index does not correspond to a location within the hash, the value nil is returned instead.

Code	Result
1 { 1 2 -> 3 4 -> } .[]@	2
11 { 1 2 -> 3 4 -> } .[]@	nil

### **[a\_hash] .each{{ ... }} [unspecified]**

Routing: NOS (since the Procedure Literal is TOS)

This method is the hash item iterator. It processes each element of the hash in turn, calling the embedded procedure literal block with the value (v) and index (x) of the current array item.

For more information on the methods local to the embedded procedure, see the Procedure class.

<b>Code</b>	<b>Result</b>
<pre>{ 0 "1" -&gt; 1 "2" -&gt; 2 "3" -&gt; 3 "4" -&gt; } .each{ v x 1+ * . space }</pre>	(Prints out:) 1 22 333 4444
<pre>{ 0 "1" -&gt; 1 "2" -&gt; 2 "3" -&gt; 3 "4" -&gt; } .each{ v . space }</pre>	(Prints out:) 1 2 3 4
<pre>{ 0 "1" -&gt; 1 "2" -&gt; 2 "3" -&gt; 3 "4" -&gt; } .each{ x . space }</pre>	(Prints out:) 0 1 2 3

### **[a\_hash] .empty? [a\_boolean]**

Routing: TOS

Is this hash devoid of key/value pairs?

<b>Code</b>	<b>Result</b>
<pre>{ } .empty?</pre>	true
<pre>{ "a" 1 -&gt; } .empty?</pre>	false

### **[a\_hash] .keys [an\_array]**

Routing: TOS

This method gathers up the keys in a hash and places them in an array.

Note: This method does *not* mutate the hash.

<b>Code</b>	<b>Result</b>
<pre>{ 1 2 -&gt; 3 4 -&gt; } .keys</pre>	[ 1 3 ]

### **[a\_hash] .length [a\_count]**

Routing: TOS

How many key/value pairs are in this hash?

Code	Result
<code>{ } .length</code>	0
<code>{ "a" 1 -&gt; } .length</code>	1

### **[hash] .pp []**

Routing: TOS

This method is a pretty printer for hashes. The data in the hash is displayed with in columns for an 80 character wide display and a blank line every 50 lines. The primary use of this method was in preparing the lists of method names used in this guide. No value is returned.

Code	Result
<code>{ 1 2 -&gt; 4 555 -&gt; } .pp</code>	Displays "1=>2 4=>555"

### **[a\_hash] .to\_s [a\_string]**

Routing: TOS

Convert the hash to a string representation of that hash.

Code	Result
<code>{ 1 2 -&gt; 3 4 -&gt; } .to_s</code>	"{ 1 2 -> 3 4 -> }"

### **[hash] .strmax2 [width]**

Routing: TOS

Given an hash, this method determines the width of the largest string representation of the keys and of the values. This method is a helper method for the .pp pretty print method.

Note: This method does *not* mutate the original hash.

Code	Result
<code>{ 1 2 -&gt; 4 555 -&gt; } .strmax2</code>	13

## **[a\_hash] .values [an\_array]**

Routing: TOS

This method gathers up the values in a hash and places them in an array.

Note: This method does *not* mutate the hash.

<b>Code</b>	<b>Result</b>
<code>{ 1 2 -&gt; 3 4 -&gt; } .values</code>	<code>[ 2 4 ]</code>

# InStream

Inheritance: InStream ← Object

```
InStream Class Methods =  
.get_all .open .open{  
  
InStream Shared Methods =  
.close .getc .gets ~getc ~gets  
  
InStream Class Stubs =  
.new
```

The InStream class is used to support the reading of information from text files in an accessible file system.

## Class Methods

**[file\_name InStream] .get\_all** [[“line 1”, ... “line N”]]

Routing: TOS

This method opens the file of the given name for reading, reads the entire file into an array of lines of text in that array, then closes the file.

Note: If the file being read is large, a large amount of data will be read.

Code	Result
"test.txt" InStream .get_all	["Line 1", "Line 2", "Line 3"]
"bad.txt" InStream .get_all	F50: Unable to open the file bad.txt for reading all.

**[file\_name InStream] .open** [an\_instream]

Routing: TOS

This method opens the file of the given name for reading. It returns an instance of a InStream object that may be used for reading data from that file. The programmer is responsible for managing that instance at all times. A typical strategy is to use a local value to hold this instance.

Note: The programmer is responsible for ensuring that the file object is finally closed.

Code	Result
"test.txt" InStream .open val: rf	(Creates a local value rf with an InStream instance.)
"bad.txt" InStream .open	F50: Unable to open the file bad.txt for reading.

**[file\_name InStream] .open{{ ... }} [unspecified]**

Routing: NOS (since the Procedure Literal is TOS)

This is actually a Virtual Machine method proxy for InStream. This method opens the file of the given name for reading, it then executes the embedded procedure literal block (between the {{ and }}) with self set to the opened file for the duration of the block. Finally, it closes the file.

For more information on the methods local to the embedded procedure, see the Procedure class.

Notes: The InStream instance is automatically (and always) closed at the end of the code block.

Code	Result
<code>"test.txt" InStream .open{ ~gets }</code>	"Line 1"

***Instance Methods*****[an\_instream] .close []**

Routing: TOS

This method closes of the file associated with the InStream instance.

Code	Result
<code>fv .close</code>	(Closes the file stored in the value fv. See .open above)

**[an\_instream] .getc [a\_character]**

Routing: TOS

This method reads a single character from the file connected to an instance of an InStream.

Code	Result
<code>fv .getc</code>	"L"

### [an\_instream] .gets [a\_string]

Routing: TOS

This method reads a line of text from the file connected to an instance of an InStream.

Code	Result
<code>fv .getc</code>	"Line 1"

### [] ~getc [a\_character]

Routing: Self

This method reads a character of text from the file connected to an instance of an InStream that is the current "self" value. This most typically happens in the code block of an .open{ ... } method or an exclusive method added to an InStream instance.

Code	Result
<code>"test.txt" InStream .open{ ~getc }</code>	"L"

### [] ~gets [a\_string]

Routing: Self

This method reads a line of text from the file connected to an instance of an InStream that is the current "self" value. This most typically happens in the code block of an .open{ ... } method or an exclusive method added to an InStream instance.

Code	Result
<code>"test.txt" InStream .open{ ~gets }</code>	"Line 1"

## Class Stubs

The following method is stubbed out in the InStream class and not available: .new





# Integer

Inheritance: Integer ← Numeric ← Object

```
Integer Shared Methods =
.even? .gcd .lcm 2* << and or
.gather .join .odd? 2/ >> com xor

Helper Methods
.to_i .to_i!
```

Integers<sup>73</sup> are numbers that may be represented without any division or fractional components. In fOOrth, integers behave much more like the abstract integers of mathematics than those traditionally associated with computers. Unlike common computer integers<sup>74</sup>, fOOrth integers have no preset capacity or limit. They are able to expand to accommodate data as needed without concern for issues such as overflow. It is however true, that given a finite computer memory sub-system, such expansion cannot go on without limit, still the limit is a rather ginormous.

## Integer Literals

Like other numeric literals, integer literals are implemented directly by the parser. The parser does not have a specific rule for parsing integer literals. The parser will attempt to parse a language token as an integer when all other avenues of parsing have failed. Thus, like FORTH, in fOOrth integer literals are the parse of last resort.

Some examples follow:

Literal <sup>75</sup>	Value
7	7
-7	-7
445556678789933	445556678789933
0xff	255
0xffffffffffff	1099511627775
0xDeadBeef	3735928559

<sup>73</sup> See <http://en.wikipedia.org/wiki/Integer>

<sup>74</sup> See [http://en.wikipedia.org/wiki/Integer\\_\(computer\\_science\)](http://en.wikipedia.org/wiki/Integer_(computer_science))

<sup>75</sup> No spaces are permitted within the literal.

## Instance Methods

**[an\_integer] .even? [a\_boolean]**

Routing: TOS

This method returns true if the integer is even and false if it is odd.

Code	Result
2 .even?	true
3 .even?	false

**[d<sub>0</sub> .. d<sub>N</sub> N] .gather [[d<sub>0</sub> .. d<sub>N</sub>]]**

Routing: TOS

This method gathers up the top N elements of the stack and gathers them into an array. This is a helper method. See the Array class for more details.

**[an\_integer an\_integer] .gcd [an\_integer]**

Routing: TOS

This method computes the greatest common divisor of the two integers.

Code	Result
50 6 .gcd	2
2345 2890 .gcd	5

**[a<sub>1</sub> a<sub>2</sub> ... a<sub>N</sub> N] .join [after]**

Routing: TOS

Join the top N stack elements into an array. See the Array class for more details.

**[an\_integer an\_integer] .lcm [an\_integer]**

Routing: TOS

This method computes the lowest common denominator of the two integers.

Code	Result
50 6 .lcm	150
9 15 .lcm	45
-5 12 .lcm	60

**[an\_integer] .odd? [a\_boolean]**

Routing: TOS

This method returns true if the integer is odd and false if it is even.

Code	Result
2 .odd?	false
3 .odd?	true

**[an\_object] .to\_i [an\_integer or nil]**

Routing: TOS

Try to convert the object to an integer. If this is not possible, return nil. Contrast with .to\_i! This is a helper method of the Object class.

Code	Result
"43.1" .to_i	43
99 .to_i	99
"apple" .to_i	nil

**[an\_object] .to\_i! [an\_integer]**

Routing: TOS

Try to convert the object to an integer. If this is not possible raise an error. Contrast with .to\_i!  
This is a helper method of the Object class.

Code	Result
"43.1" .to_i!	43
99 .to_i!	99
"apple" .to_i!	Cannot coerce a String instance to an Integer instance

**[an\_integer] 2\* [an\_integer]**

Routing: TOS

Double the value of the integer.

Code	Result
13 2*	26

**[an\_integer] 2/ [an\_integer]**

Routing: TOS

Halve the value of the integer. Note that integer division is employed with rounding down towards negative infinity.

Code	Result
7 2/	3
-7 2/	-4

**[an\_integer an\_integer] << [an\_integer]**

Routing: NOS

Shift the integer value left by the number of positions indicated. A shift count of zero takes no action. A negative shift count shifts right by the number of positions indicated.

Note: When shifting right, rounding toward negative infinity is used.

Code	Result
4 14 <<	65536
4 0 <<	4
4 -1 <<	2
-10 3 <<	-80
-10 5 <<	-320
-10 -3 <<	-2
-10 -5 <<	-1

**[an\_integer an\_integer] >> [an\_integer]**

Routing: NOS

Shift the integer value right by the number of positions indicated. A shift count of zero takes no action. A negative shift count shifts left by the number of positions indicated.

Note: When shifting right, rounding toward negative infinity is used.

Code	Result
4 1 >>	2
4 0 >>	4
4 -1 >>	8
-10 3 >>	-2
-10 5 >>	-1
-10 -3 >>	-80
-10 -5 >>	-320

**[an\_integer an\_integer] and [an\_integer]**

Routing: NOS

Compute the bit-wise and function of the two integer values.

<b>Code</b>	<b>Result</b>
15 40 and	8

**[an\_integer] com [an\_integer]**

Routing: TOS

This method computes the bit-wise complement of the integer value.

<b>Code</b>	<b>Result</b>
34 com	-35
0 com	-1

**[an\_integer an\_integer] or [an\_integer]**

Routing: NOS

Compute the bit-wise inclusive or function of the two integer values.

<b>Code</b>	<b>Result</b>
15 40 or	47

**[an\_integer an\_integer] xor [an\_integer]**

Routing: NOS

Compute the bit-wise exclusive or function of the two integer values.

<b>Code</b>	<b>Result</b>
15 40 xor	39

# Mutex

Inheritance: Mutex ← Object

```
Mutex Class Methods =
.do{}

Mutex Shared Methods =
.do{} .lock .unlock
```

The Mutex class is used to support the concept of mutual exclusion<sup>76</sup>. Mutual exclusion refers to the requirement of ensuring that no two concurrent processes are in their critical section at the same time; it is a basic requirement in concurrency control, to prevent race conditions.

The default implementation of .new is used to create new instances of Mutex as follows:

```
Mutex .new
```

An example use of the Mutex is coordinating access to a counter shared by many threads<sup>77</sup>:

```
( a_count test_mutex 100*a_count )
: test_mutex
0 var: ctr
Array .new{{
  x .to_s Thread .new{{
    0 100 do
      Mutex .do{{ ctr @ 1+ ctr ! }}
      0.001 .sleep
    loop
  }}
}} .each{{ v .join }}
ctr @ ;
```

## Class Methods

### [Mutex] .do{{ ... }} []

Routing: NOS (since the Procedure Literal is TOS)

This method executes the embedded procedure literal block with an exclusion for all other code blocks guarded by a shared, system wide mutex instance. See example above.

For more information on the methods local to the embedded procedure, see the Procedure class.

<sup>76</sup> See [https://en.wikipedia.org/wiki/Mutual\\_exclusion](https://en.wikipedia.org/wiki/Mutual_exclusion)

<sup>77</sup> This example may be found in mutex.footh which may be found in the doc/snippets folder.

## Instance Methods

### **[a\_mutex] .do{{ ... }} []**

Routing: NOS (since the Procedure Literal is TOS)

This method executes the embedded procedure literal block with an exclusion for all other code blocks guarded by the same mutex instance. The above example, rewritten to use a local mutex instance is shown below:

```
( a_count test_mutex 100*a_count )
: test_mutex
0 var: ctr Mutex .new val: mex
Array .new{{
  x .to_s Thread .new{{
    0 100 do
      mex .do{{ ctr @ 1+ ctr ! }}
      0.001 .sleep
    loop
  }}
}} .each{{ v .join }}
ctr @ ;
```

For more information on the methods local to the embedded procedure, see the Procedure class.

### **[a\_mutex] .lock []**

Routing: TOS

Gain a lock on a resource, waiting until the mutex is unlocked before proceeding.

Code	Result
mex .lock	

### **[a\_mutex] .unlock []**

Routing: TOS

Unlock the mutex, giving access to the resource to other threads.

Code	Result
mex .unlock	



## NilClass

Inheritance: NilClass ← Object

```
NilClass Shared Methods =
  &&    ^^    nil<>  nil=  not  ||
```

The value nil of the class NilClass is a placeholder for nothing, that is the absence of all data. In other languages like “C” NULL is a special pointer value with restrictions on its use. In fOOrth, nil is just another object with a very bad reputation!

Note that in Boolean expressions, nil is treated as an alias for false.

### **NilClass Literals**

Instances of the NilClass are available through the Virtual Machine helper method “nil”.

### **Instance Methods**

#### **[nil object] && [false]**

**Routing:** NOS.

Logical AND for the case where the first operand is nil. Always false.

Note: Other parts of this method are implemented in the Object and FalseClass classes.

Code	Result
nil true &&	false

#### **[nil object] ^^ [true or false]**

**Routing:** NOS.

Logical, exclusive OR for the case where the first operand is nil. This takes on the value of the second operand converted to a Boolean value.

Note: Other parts of this method are implemented in the Object and FalseClass classes.

Code	Result
nil false ^^	false
nil true ^^	true

## **[nil object] || [true or false]**

**Routing:** NOS.

Logical, inclusive OR for the case where the first operand is nil. This takes on the value of the second operand converted to a Boolean value.

Note: Other parts of this method are implemented in the Object and FalseClass classes.

<b>Code</b>	<b>Result</b>
<code>nil false   </code>	<code>false</code>
<code>nil true   </code>	<code>true</code>

## Numeric

Inheritance: Numeric ← Object

```
Numeric Shared Methods =
*          .atanh          .ln          .sqr          1-
**         .c2p           .log10       .sqrt         2*
+          .cbrr          .log2        .tan          2+
-          .ceil          .magnitude   .tanh         2-
.1/x       .conjugate     .numerator   .to_t         2/
.10**      .cos            .p2c         .to_t!        <
.2**       .cosh          .polar       /             <=
.abs       .cube          .r2d         0<           <=>
.acos      .d2r            .rationalize_to 0<=         >
.acosh     .denominator   .real        0<=>         >=
.angle     .e**           .round       0<>          mod
.asin      .emit          .round_to    0=           neg
.asinh     .floor         .sin         0>
.atan      .hypot        .sinh        0>=
.atan2     .imaginary    .sleep       1+
```

```
Helper Methods =
.to_n      .to_n!
```

The Numeric class is the abstract base class for numeric data. It is the location for the vast majority of methods that act on such data. In use, data will be instances of Complex, Float, Integer (via Bignum and Fixnum), and Rational data.

### Special Numeric Values

**[] -infinity [a\_float]**

Routing: VM

This method pushes the special floating point value -Infinity.

Code	Result
<code>-infinity</code>	<code>-Infinity</code>

**[] dpr [a\_float]**

Routing: VM

This method pushes the degrees per radians constant onto the stack. This has a value of  $180/\pi$ .

Code	Result
dpr	57.29577951308232

**[] e [a\_float]**

Routing: VM

This method pushes the value e, the base of the natural logarithms, onto the stack.

Code	Result
e	2.718281828459045

**[] epsilon [a\_float]**

Routing: VM

This smallest float such that  $1.0 + \text{epsilon} <> 1.0$ . The more generalized case is

$$n + (n * \text{epsilon}) \neq n$$

Code	Result
epsilon	2.220446049250313e-16
1.0 epsilon +	1.0000000000000002
1.0 epsilon 2/ +	1.0
100.0 dup epsilon * +	100.00000000000003
0.01 dup epsilon * +	0.010000000000000002

**[] infinity [a\_float]**

Routing: VM

This method pushes the special floating point value Infinity.

Code	Result
-infinity	Infinity

### **[] max\_float [a\_float]**

Routing: VM

This method pushes the value of the largest allowed floating point number, currently this is 1.7976931348623157e+308 on the current test environment.

<b>Code</b>	<b>Result</b>
max_float	1.7976931348623157e+308

### **[] min\_float [a\_float]**

Routing: VM

This method pushes the value of the smallest, non-zero, floating point number, currently this is 2.2250738585072014e-308 on the current test environment.

<b>Code</b>	<b>Result</b>
min_float	2.2250738585072014e-308

### **[] nan [a\_float]**

Routing: VM

This method pushes the special floating point value Not-A-Number (NaN).

<b>Code</b>	<b>Result</b>
nan	NaN

### **[] pi [a\_float]**

Routing: VM

This method pushes the famous value pi, the ratio of a circle's circumference to its diameter, onto the stack.

<b>Code</b>	<b>Result</b>
pi	3.141592653589793 <sup>78</sup>

---

<sup>78</sup> In 1897, several attempts were made to legislate the value of pi to a number of incorrectly computed values. Fortunately, these efforts were unsuccessful.

## Instance Methods

**[a\_numeric a\_numeric] \* [a\_numeric]**

Routing: NOS

The multiplication operator is implemented by this method.

Code	Result
10 3 *	30
22.7 1.5 *	34.05
22.7 3/2 *	34.05
3/2 4/5 *	6/5
2+3i 3+4i *	-6+17i

**[a\_numeric a\_numeric] \*\* [a\_numeric]**

Routing: NOS

The exponentiation operator is implemented by this method. Note the the second operand, the power, is converted to a Float first.

Code	Result
2 10 **	1024
3 4 **	81
2 1/2 **	1.4142135623730951

**[a\_numeric a\_numeric] + [a\_numeric]**

Routing: NOS

The addition operator is implemented by this method.

Code	Result
1 1 +	2
1.0 7.2 +	8.2
1/2 1/3 +	5/6
1+2i 1+3i +	2+5i

**[a\_numeric a\_numeric] - [a\_numeric]**

Routing: NOS

The subtraction operator is implemented by this method.

Code	Result
1 1 -	0
1.0 7.2 -	-6.2
1/2 1/3 -	1/6
1+2i 1+3i -	0-1i

**[a\_numeric] .1/x [a\_numeric]**

Routing: TOS

This method computes the value of 1/x for the numeric argument. Note that division by zero produces an error in most cases except for 0.0 which produces Infinity.

Code	Result
2 .1/x	0
2.0 .1/x	0.5
0 .1/x	E15: divided by 0
0.0 .1/x	Infinity

**[a\_numeric] .10\*\* [a\_float]**

Routing: TOS

This method computes  $10^x$  for the numeric argument.

Code	Result
3 .10**	1000.0
1/3 .10**	2.154434690031884
-3 .10**	0.001

**[a\_numeric] .2\*\* [a\_float]**

Routing: TOS

This method computes  $2^x$  for the numeric argument.

Code	Result
10 .2**	1024.0
-3 .2**	0.125
1+1i .2**	1.5384778027279442+1.2779225526272695i

**[a\_numeric] .abs [a\_numeric]**

Routing: TOS

This method computes the absolute value of the argument number. Note that for complex numbers, this is the magnitude of the argument.

Code	Result
1 .abs	1
1.0 .abs	1.0
1/1 .abs	1/1
-1 .abs	1
1+1i .abs	1.4142135623730951

**[a\_numeric] .acos [a\_float]**

Routing: TOS

This method computes the arc-cosine ( $\cos(x)^{-1}$ ) of the value. That is it computes the angle in radians whose cosine is the argument<sup>79</sup>.

Code	Result
1 .acos	0.0
0 .acos	1.5707963267948966

<sup>79</sup> Please see [http://en.wikipedia.org/wiki/Inverse\\_trigonometric\\_functions](http://en.wikipedia.org/wiki/Inverse_trigonometric_functions) for more details on inverse trigonometric functions.



**[a\_numeric] .acosh [a\_float]**

Routing: TOS

This method computes the arc-hyperbolic-cosine ( $\cosh(x)^{-1}$ ) of the value. That is it computes the angle in radians whose hyperbolic-cosine is the argument<sup>80</sup>.

Code	Result
1 .acosh	0.0

**[a\_numeric] .angle [a\_float]**

Routing: TOS

For complex numbers, this method computes the phase angle in radians of the number. For non complex numbers, this angle is zero for positive values and pi for negative ones.

Code	Result
1+1i .angle	0.7853981633974483
1 .angle	0.0
-1 .angle	3.141592653589793

**[a\_numeric] .asin [a\_float]**

Routing: TOS

This method computes the arc-sine ( $\sin(x)^{-1}$ ) of the value. That is it computes the angle in radians whose sine is the argument.

Code	Result
1 .asin	1.5707963267948966
0 .asin	0.0

<sup>80</sup> Please see [http://en.wikipedia.org/wiki/Inverse\\_hyperbolic\\_function](http://en.wikipedia.org/wiki/Inverse_hyperbolic_function) for more details on inverse hyperbolic trigonometric functions.

**[a\_numeric] .asinh [a\_float]**

Routing: TOS

This method computes the arc-hyperbolic-sine ( $\sinh(x)^{-1}$ ) of the value. That is it computes the angle in radians whose hyperbolic-sine is the argument

Code	Result
1 .asinh	0.881373587019543

**[a\_numeric] .atan [a\_float]**

Routing: TOS

This method computes the arc-tangent ( $\tan(x)^{-1}$ ) of the value. That is it computes the angle in radians whose tangent is the argument.

Code	Result
1 .atan	0.7853981633974483

**[a\_numeric a\_numeric] .atan2 [a\_float]**

Routing: TOS

This is the two argument version of atan (arc-tangent).

For any real number arguments  $x$ ,  $y$  not both equal to zero,  $\text{atan2}(y, x)$  is the angle in radians between the positive  $x$ -axis of a plane and the point given by the coordinates  $(x, y)$  on it. The angle is positive for counter-clockwise angles (upper half-plane,  $y > 0$ ), and negative for clockwise angles (lower half-plane,  $y < 0$ )<sup>81</sup>.

Code	Result

---

81 From <http://en.wikipedia.org/wiki/Atan2>.

**[a\_numeric] .atanh [a\_float]**

Routing: TOS

This method computes the arc-hyperbolic-tangent ( $\tanh(x)^{-1}$ ) of the value. That is it computes the angle in radians whose hyperbolic-tangent is the argument

Code	Result
0 .atanh	0.0
1 .atanh	Infinity

**[a\_numeric a\_numeric] .c2p [a\_float a\_float]**

Routing: TOS

This method converts a two dimensional Cartesian coordinate to its equivalent Polar coordinate. On input the arguments are x, y. On output, the results are magnitude, angle (in radians).

Code	Result
1 1 .c2p	1.4142135623730951, 0.7853981633974483

**[a\_numeric] .cbrt [a\_float]**

Routing: TOS

This method computes the cube root ( $X^{1/3}$ ) of the value.

Code	Result
8 .cbrt	2.0
-8 .cbrt	-2.0

**[a\_numeric] .ceil [an\_integer]**

Routing: TOS

This method computes the smallest integer that is greater than or equal to the argument.

Code	Result
55.5 .ceil	56
-55.5 .ceil	55

### **[a\_numeric] .conjugate [a\_numeric]**

Routing: TOS

This method computes the complex conjugate of the argument. For non-complex data, this has no effect.

<b>Code</b>	<b>Result</b>
2+3i .conjugate	2-3i
42 .conjugate	42

### **[a\_numeric] .cos [a\_float]**

Routing: TOS

This method computes the cosine<sup>82</sup> of the argument angle in radians.

<b>Code</b>	<b>Result</b>
0 .cos	1.0
pi .cos	-1.0

### **[a\_numeric] .cosh [a\_float]**

Routing: TOS

This method computes the hyperbolic-cosine<sup>83</sup> of the argument angle in radians.

<b>Code</b>	<b>Result</b>
0 .cosh	0.0

### **[a\_numeric] .cube [a\_numeric]**

Routing: TOS

This method computes the cube ( $X^3$ ) of the number.

<b>Code</b>	<b>Result</b>
3 .cube	27
3.0 .cube	27.0

<sup>82</sup> See [http://en.wikipedia.org/wiki/Trigonometric\\_functions](http://en.wikipedia.org/wiki/Trigonometric_functions) for further information.

<sup>83</sup> See [http://en.wikipedia.org/wiki/Hyperbolic\\_function](http://en.wikipedia.org/wiki/Hyperbolic_function) for further information.

**[a\_numeric] .d2r [a\_float]**

Routing: TOS

This method converts the argument number from degrees to radians.

Code	Result
180 .d2r	3.141592653589793

**[a\_numeric] .denominator [an\_integer]**

Routing: TOS

This method extracts the denominator from the rational argument. If the argument is a float or complex, it extracts the denominator of the rationalized equivalent of that number. If the argument is an integer, the denominator is always one.

Code	Result
1/3 .denominator	3
2.5 .denominator	2
1.5+2.25i .denominator	4
7 .denominator	1

**[a\_numeric] .e\*\* [a\_float]**

Routing: TOS

This method computes the value of e raised to the power of the argument ( $e^x$ ).

Code	Result
1 .e**	2.718281828459045
10 .e**	22026.465794806718

**[a\_numeric] .emit []**

Routing: TOS

This method emits a character with the code of numeric argument.

Code	Result
65 .emit	(Prints an "A")

**[a\_numeric] .floor [an\_integer]**

Routing: TOS

This method computes the largest integer that is less than or equal to the argument.

Code	Result
2.3 .floor	2
-2.3 .floor	-3

**[a\_numeric a\_numeric] .hypot [a\_float]**

Routing: TOS

Given two lengths, this method computes the length of the hypotenuse.

Code	Result
3 4 .hypot	5.0

**[a\_numeric] .imaginary [a\_numeric]**

Routing: TOS

This method extracts the imaginary component of a complex number. For non-complex numbers this is always zero.

Code	Result
1+2i .imaginary	2
1-2i .imaginary	-2
42 .imaginary	0

**[a\_numeric] .ln [a\_float]**

Routing: TOS

This method computes the natural logarithm ( $\log_e$ ) of the given value.

Code	Result
1 .ln	0.0
e .ln	1.0
10 .ln	2.302585092994046

**[a\_numeric] .log10 [a\_float]**

Routing: TOS

This method computes the base 10 logarithm ( $\log_{10}$ ) of the given value.

Code	Result
1 .log10	0.0
e .log10	0.4342944819032518
10 .log10	1.0

**[a\_numeric] .log2 [a\_float]**

Routing: TOS

This method computes the base 2 logarithm ( $\log_2$ ) of the given value.

Code	Result
2 .log2	1.0
e .log2	1.4426950408889634
10 .log2	3.321928094887362

**[a\_numeric] .magnitude [a\_numeric]**

Routing: TOS

This method computes the magnitude of a complex value. For non-complex values, it computes the absolute value of the argument.

Code	Result
3+4i .magnitude	5.0
-3 .magnitude	3

**[a\_numeric] .numerator [a\_numeric]**

Routing: TOS

This method extracts the numerator from the rational argument. If the argument is a float or complex, it extracts the numerator of the rationalized equivalent of that number. If the argument is an integer, the numerator is the same as the number.

Code	Result
1/3 .numerator	1
2.5 .numerator	5
1.5+2.25i .numerator	6+9i
7 .numerator	7

**[a\_numeric a\_numeric] .p2c [a\_float a\_float]**

Routing: TOS

This method converts a two dimensional Polar coordinate to its equivalent Cartesian coordinate. On input the arguments are magnitude, angle (in radians). On output, the results are x, y.

Code	Result
1 pi .p2c	1.2246063538223773e-16, -1.0
1 0 .p2c	0.0, 1.0

**[a\_numeric] .polar [a\_float a\_float]**

Routing: TOS

This method converts a complex number to a magnitude and an angle (in radians). For non-complex data, the result is the absolute value of the number and zero radians for positive values and pi radians for negative values.

Code	Result
1+1i .polar	1.4142135623730951, 0.7853981633974483
5 .polar	5, 0
-5 .polar	5, 3.141592653589793



**[a\_numeric] .r2d [a\_float]**

Routing: TOS

Convert a angle value from radians to degrees.

Code	Result
Pi .r2d	180.0

**[error\_float a\_numeric] .rationalize\_to [a\_rational]**

Routing: TOS

Convert a numeric into the simplest rational with an error not greater than the error\_float. See the Rational class for more details.

**[a\_numeric] .real [a\_numeric]**

Routing: TOS

This method returns the real component of a complex number. For non-complex number, it simply returns the number unchanged.

Code	Result
4+2i .real	4

**[a\_numeric] .round [an\_integer]**

Routing: TOS

This method rounds the argument number to the nearest integer.

Code	Result
4.1 .round	4
4.5 .round	5
4.9 .round	5
-4.1 .round	-4
-4.5 .round	-5
-4.9 .round	-5

### [num\_digits a\_number] .round\_to [a\_float]

Routing: TOS

Round the number to the specified number of digits past the decimal point. Negative digits round to places before the decimal point.

Note: Complex data are not supported.

Code	Result
2 pi .round_to	3.14
-2 12345.666 .round_to	12300
2 3.12345+4i .round_to	F40: Cannot coerce a Complex instance to a Float instance

### [a\_numeric] .sin [a\_float]

Routing: TOS

This method computes the sine of the argument angle in radians.

Code	Result
0 .sin	0.0
pi 2/ .sin	1.0

### [a\_numeric] .sinh [a\_float]

Routing: TOS

This method computes the hyperbolic-sine of the argument angle in radians.

Code	Result
0 .sinh	0.0
pi 2/ .sin	2.3012989023072947

### [a\_numeric] .sleep []

Routing: TOS

This method will put the current thread to sleep for the specified number of seconds. See the Thread class for more details.

**[a\_numeric] .sqr [a\_numeric]**

Routing: TOS

This method computes the square of the argument value.

Code	Result
4 .sqr	16
2/3 .sqr	4/9
1+1i .sqr	0+2i

**[a\_numeric] .sqrt [a\_float]**

Routing: TOS

This method computes the square root of the argument value.

Code	Result
16 .sqrt	4.0
4/9 .sqrt	0.6666666666666666

**[a\_numeric] .tan [a\_float]**

Routing: TOS

This method computes the tangent of the argument angle in radians.

Code	Result
0 .tan	0.0
pi 4 / .tan	0.9999999999999999

**[a\_numeric] .tanh [a\_float]**

Routing: TOS

This method computes the hyperbolic-tangent of the argument angle in radians.

Code	Result
0 .tanh	0.0
1.0E6 .tanh	1.0

**[numeric] .to\_t [a\_time]**

Routing: TOS

Convert the number to a time object. This is a helper method for the Time class.

**[numeric] .to\_t! [a\_time]**

Routing: TOS

Convert the number to a time object. This is a helper method for the Time class.

**[an\_object] .to\_n [a\_numeric]**

Routing: TOS

Try to convert the object into the appropriate type of Numeric value. If this is not possible, return nil instead. Contrast with .to\_n! This is a helper method of the Object class.

Code	Result
2 .to_n	2
2.0 .to_n	2.0
"2" .to_n	2
"2.0" .to_n	2.0
"1/2" .to_n	1/2
"1+2i" .to_n	1+2i
"apple" .to_n	nil

**[an\_object] .to\_n! [a\_numeric]**

Routing: TOS

Try to convert the object into the appropriate type of Numeric value. If this is not possible, raise an error. Contrast with .to\_n This is a helper method of the Object class.

Code	Result
2 .to_n!	2
2.0 .to_n!	2.0
"2" .to_n!	2
"2.0" .to_n!	2.0
"1/2" .to_n!	1/2
"1+2i" .to_n!	1+2i
"apple" .to_n!	Cannot convert a String instance to a Numeric instance

**[a\_numeric a\_numeric] / [a\_numeric]**

Routing: NOS

This method implements the division operator.

Code	Result
3 4 /	0
3.0 4 /	0.75
1 0 /	E15: divided by 0
1.0 0 /	Infinity
2/3 3 /	2/9

**[a\_numeric] 0< [a\_boolean]**

Routing: TOS

Is this number less than zero?

Code	Result
3 0<	false
0 0<	false
-3 0<	true

**[a\_numeric] 0<=[a\_boolean]**

Routing: TOS

Is this number less than or equal to zero?

Code	Result
3 0<=	false
0 0<=	true
-3 0<=	true

**[a\_numeric] 0<=> [1, 0, or -1]**

Routing: TOS

Perform a “three outcome” comparison of the value with zero.

Code	Result
3 0<=>	1
0 0<=>	0
-3 0<=>	-1

**[a\_numeric] 0<> [a\_boolean]**

Routing: TOS

Is the number not equal to zero?

Code	Result
3 0<>	true
0 0<>	false
-3 0<>	true

**[a\_numeric] 0= [a\_boolean]**

Routing: TOS

Is the number equal to zero?

Code	Result
3 0=	true
0 0=	false
-3 0=	true

**[a\_numeric] 0> [a\_boolean]**

Routing: TOS

Is the number greater than zero?

Code	Result
3 0=	true
0 0=	false
-3 0=	false

**[a\_numeric] 0>= [a\_boolean]**

Routing: TOS

Is the number greater than or equal to zero?

Code	Result
3 0=	true
0 0=	true
-3 0=	false

**[a\_numeric] 1+ [a\_numeric]**

Routing: TOS

Add one to the number

Code	Result
2 1+	3
1/3 1+	4/3

**[a\_numeric] 1- [a\_numeric]**

Routing: TOS

Subtract one from the number

Code	Result
2 1-	1
1/3 1-	-2/3

**[a\_numeric] 2\* [a\_numeric]**

Routing: TOS

Multiply the number by two.

Code	Result
2 2*	4
1/3 2*	2/3

**[a\_numeric] 2+ [a\_numeric]**

Routing: TOS

Add two to the number

Code	Result
2 2+	4
1/3 2+	7/3



**[a\_numeric] 2- [a\_numeric]**

Routing: TOS

Subtract two from the number

Code	Result
2 2-	0
1/3 2-	-5/3

**[a\_numeric] 2/ [a\_numeric]**

Routing: TOS

Divide the number by two. Note that for integers, rounding down toward negative infinity is employed.

Code	Result
2 2/	1
1/3 2/	1/6
3 2/	1
-3 2/	-2
3.0 2/	1.5
-3.0 2/	-1.5

**[a\_numeric a\_numeric] < [a\_boolean]**

Routing: NOS

Is the first number less than the second?

Code	Result
3 0 <	false
0 0 <	false
-3 0 <	true

**[a\_numeric a\_numeric] <= [a\_boolean]**

Routing: NOS

Is the first number less than or equal to the second?

Code	Result
3 0 <=	false
0 0 <=	true
-3 0 <=	true

**[a\_numeric a\_numeric] <=> [-1, 0, or 1]**

Routing: NOS

Perform a “three outcome” comparison of the first value with the second value.

Code	Result
3 0 <=>	1
0 0 <=>	0
-3 0 <=>	-1

**[a\_numeric a\_numeric] > [a\_boolean]**

Routing: NOS

Is the first number greater than the second number.

Code	Result
3 0 >	true
0 0 >	false
-3 0 >	false

**[a\_numeric a\_numeric] >= [a\_boolean]**

Routing: NOS

Is the first number greater than or equal to the second number.

Code	Result
3 0 >=	true
0 0 >=	true
-3 0 >=	false

**[a\_numeric a\_numeric] mod [a\_numeric]**

Routing: NOS

Compute the modulus (or remainder) of dividing the first number by the second.

Code	Result
5 3 mod	2
5.0 3.0 mod	2.0
7/3 1/4 mod	1/12
20.5 6 mod	2.5
10 0 mod	E15: divided by 0
10.0 0.0 mod	E15: divided by 0

**[a\_numeric] neg [a\_numeric]**

Routing: TOS

Compute zero minus the number.

Code	Result
5 neg	-5
2.3 neg	-2.3
1/3 neg	-1/3



# Object

Inheritance: Object ← nil

```

Object Shared Methods =
&&          .is_class?      .to_i!      .with{{      max
)methods    .name            .to_n      <>          min
.           .strlen        .to_n!     =           nil<>
.class      .to_duration    .to_r      ^^          nil=
.clone      .to_duration!  .to_r!     distinct?   not
.clone_exclude .to_f        .to_s      f"          ||
.copy       .to_f!        .to_x      format
.init       .to_i        .to_x!     identical?

Object Shared Stubs =
!           .append{{      .open{{      0<>        2*          <=         and         p"
)stubs     .create{{      .select{{    0=         2+          <=>        com         parse
*          .do{{        /           0>         2-          >          mod         parse!
**         .each{{      0<         0>=        2/          >=         neg         xor
+          .map{{      0<=        1+         <           >>         or
-          .new{{      0<=>      1-         <<          @          p!"

```

The Object class is the root of the class tree. The fOOOrth Object class has no parent class. This is why it is depicted above as being derived from nil. All other classes inherit from the Object class and gain its methods and functionality.

## Instance Methods

**[object\_a object\_b] && [true or false]**

**Routing: NOS**

Logical AND for the case where the first operand is true. This takes on the value of the second operand converted to a Boolean value.

Note: Other parts of this method are implemented in the NilClass and FalseClass classes.

Code	Result
false false &&	false
false true &&	false
true false &&	false
true true &&	true

## [object] . []

**Routing:** TOS.

Print out the object on the console using the default formatting.

Code	Result
42 .	(Prints out the answer to life, the universe and everything.)

## [an\_object] .:: method\_name ... ; []

**Routing:** VM.

Start defining an exclusive (singleton in Ruby parlance) method on the receiver object. The form of this definition takes the form:

```
<an object> .:: <method name> <code goes here> ;
```

For information on how the name affects the type of method created, see the section Routing above.

### Notes

- Copies and clones of the affected object retain any additional methods added to that object before it was copied or cloned. See Cloning Data above for more details.
- Not all objects support exclusive methods. If that is the case then an error occurs.

Code	Result
Array .new .name .	(Prints) Array instance
[ 3 ] val\$: \$vv \$vv .:: .name "Fred" ; \$vv .name .	(Prints) Fred
\$vv .copy .name .	(Prints) Fred
5 .:: foo 10 ;	F13: Exclusive methods not allowed for type: Fixnum

**Local Methods:**

***[value] val: local\_name []***

Routing: Compiler Context.

This method defines a local value in the current method.

See Data Storage in fOOrth, above, for more details on values and variables.

**Code**

```
10 val: limit
```

**Result**

(Creates a value named limit set to 10)

***[value] var: local\_name []***

Routing: Compiler Context.

This method defines a local variable in the current method.

See Data Storage in fOOrth, above, for more details on values and variables.

**Code**

```
10 var: limit
```

**Result**

(Creates a variable named limit set to 10)

***[value] val@: @instance\_name []***

Routing: Compiler Context.

This method creates an instance value in the instance of the host class.

See Data Storage in fOOrth, above, for more details on values and variables.

**Code**

```
10 val@: @limit
```

**Result**

(Creates an instance value named @limit set to 10)

***[value] var@: @instance\_name []***

Routing: Compiler Context.

This method creates an instance value in the instance of the host class.

See Data Storage in fOOrth, above, for more details on values and variables.

**Code**

```
10 var@: @limit
```

**Result**

(Creates an instance variable named @limit initially set to 10)

### **[] super []**

**Routing:** Self.

Call the previously defined method for this object. This allows a method to do all the things that the parent method did with customization of the parameters and additional pre and post actions.

### **[] ... ; []**

**Routing:** Compiler Context.

Close off the compilation and its context. The method definition is terminated by this trailing semi-colon. After this method, this and the above local methods are no longer available.

### **[an\_object] .class [a\_class]**

**Routing:** TOS.

Get the class of the receiver object.

<b>Code</b>	<b>Result</b>
1/2 .class	Rational
"apple" .class	String
Nil .class	NilClass

### **[an\_object] .clone [an\_object']**

**Routing:** TOS.

Create a clone of receiver object. This clone is accomplished by performing a deep copy of the object, and all of its instance data and any data referenced by that data. The deep copy process has loop and cyclic graph detection to avoid going off into an infinite recursion. This contrasts with the VirtualMachine word “clone” which combines the actions of “dup .clone”.

See Cloning Data above for more details.

<b>Code</b>	<b>Result</b>
@title .clone ": " @name <<	(By cloning @title, the string is not mutated.)



## **[] .clone\_exclude [an\_array\_of\_exclusions]**

Routing: TOS

This method is part of the fOOrth implementation of the full clone protocol. This method is seldom called directly, instead it is called as a result of a call to the clone or .clone methods.

The purpose of the .clone\_exclude method is to specify those data members that are excluded from the cloning process. For instance variables this is an array of strings with the names of those variables.

It is expected that sub-classes of the Object class will override this method and return an exclusion list appropriate for their needs.

<b>Code Definition Example</b>	<b>Result</b>
<pre>MyClass .: .clone_exclude [ "@foo" ] ;</pre>	(The variable @foo will no be cloned.)

## **[an\_object] .copy [an\_object']**

Routing: TOS

Create a copy of receiver object. This copy is accomplished by performing a shallow copy of the object, and all of its instance data but not any data referenced by that data. This contrasts with the VirtualMachine word “copy” which combines the actions of “dup .copy”.

See Cloning Data above for more details.

<b>Code</b>	<b>Result</b>
<pre>@title .clone ": " @name &lt;&lt;</pre>	(By cloning @title, the string is not mutated.)

## [unspecified an\_object] .init [unspecified]

**Routing:** TOS

The “.init” method is never called directly. Instead, this method is called by the “.new” method of the Class class. Its purpose is to perform any needed setup on the object being created. Parameters to the “.new” appear as parameters to the “.init” method. It is expected that user defined classes will override the “.init” method default in Object which takes no action.

In a hierarchy of classes, access to earlier versions of the .init method is possible with the super method (see super, a local method of “.” in Class and “::” in Object).

Code Definition Example	Result
<pre>MyClass .: .init val@: @name ;</pre>	(Creates an initialization method that takes an argument as the initial value for the name. In use it would appear as the usage example.
Usage Example	
<pre>"Peter Camilleri" MyClass .new</pre>	(Creates an instance of the MyClass class with the @name value set to the string “Peter Camilleri”)

## [an\_object] .is\_class? [false]

**Routing:** TOS

Is this Object a Class? No! Returns false. See the version of this method in Class for a more positive slant on things.

Code	Result
<pre>Object .is_class</pre>	true
<pre>42 .is_class</pre>	false

**[an\_object] .name [a\_string]****Routing:** TOS

Get the name of the object. For Class objects, this is the name of the class. For other objects, this is the name of their class followed by “instance”. For Virtual Machine instances, the name of the VM is also appended.

Code	Result
Object .name	“Object”
100 .name	“Fixnum instance”
vm .name	“VirtualMachine instance <Main>”

**[an\_object] .strlen [integer]****Routing:** TOS

If the object is a string, determine the length of a string, else determine the length of the string created when the object is converted to a string (see .to\_s for further info).

Code	Result
"ABCD" .strlen	4
100 .strlen	3
Object .strlen	6

**[an\_object] .to\_duration [a\_duration]****Routing:** TOS

A helper method for the Duration class. See that class for more details.

**[an\_object] .to\_duration! [a\_duration]****Routing:** TOS

A helper method for the Duration class. See that class for more details.

**[an\_object] .to\_f [a\_float or nil]**

**Routing:** TOS

Try to convert the object to a float. See the Float class for more details.

**[an\_object] .to\_f! [a\_float]**

**Routing:** TOS

Try to convert the object to a float. See the Float class for more details.

**[an\_object] .to\_i [an\_integer or nil]**

**Routing:** TOS

Try to convert the object to an integer. See the Integer class for more details.

**[an\_object] .to\_i! [an\_integer]**

**Routing:** TOS

Try to convert the object to an integer. If this is not possible raise an error. Contrast with .to\_i!  
See the Integer class for more details.

**[an\_object] .to\_n [a\_numeric]**

**Routing:** TOS

Try to convert the object into the appropriate type of Numeric value. See the Numeric class for more details.

**[an\_object] .to\_n! [a\_numeric]**

**Routing:** TOS

Try to convert the object into the appropriate type of Numeric value. See the Numeric class for more details.

**[an\_object] .to\_r [a\_rational or nil]**

**Routing:** TOS

Try to convert the object into a Rational. See the Rational class for more details.

**[an\_object] .to\_r! [a\_rational]**

**Routing:** TOS

Try to convert the object into a Rational. See the Rational class for more details.

**[an\_object] .to\_s [a\_string]**

**Routing:** TOS

Convert the object to a string. See the String class for more details.

**[an\_object] .to\_x [a\_complex or nil]**

**Routing:** TOS

Try to convert the object into a Complex. See the Complex class for more details.

**[an\_object] .to\_x! [a\_complex]**

**Routing:** TOS

Try to convert the object into a Complex. See the Complex class for more details.

## **[an\_object] .with{{ ... }} [unspecified]**

Routing: NOS (since the Procedure Literal is TOS)

This method is used to override the default value of “self” in a embedded procedure literal block of code. The argument object is used as the “self” for the duration of the block. This allows access to ~ methods and instance data. It can also be a handy short-form access to the object. See the section Self for more details.

For more information on the methods local to the embedded procedure, see the Procedure class.

<b>Code</b>	<b>Result</b>
<pre>42 .with{ 0 5 do i self + . space loop }</pre>	(Prints) 42 43 44 45 46
<pre>Object .new .with{   10 var@: @limit   self val\$: \$count }</pre>	(Creates an instance of the Object class, adds the instance variable, @limit and sets the global value \$count to it.)

## **[object\_a object\_b] <> [a\_boolean]**

Routing: NOS

Return true if object\_a does not equal object\_b, else return false.

<b>Code</b>	<b>Result</b>
<pre>42 42 &lt;&gt;</pre>	false
<pre>42 43 &lt;&gt;</pre>	true
<pre>"5" 5 &lt;&gt;</pre>	true
<pre>[ "5" ] [ "5" ] &lt;&gt;</pre>	false
<pre>[ "5" ] [ "6" ] &lt;&gt;</pre>	true

**[object\_a object\_b] = [a\_boolean]****Routing:** NOS

Return true if object\_a is equal to object\_b, else return false.

Code	Result
42 42 =	true
42 43 =	false
"5" 5 =	false
[ "5" ] [ "5" ] =	true
[ "5" ] [ "6" ] =	false

**[object\_a object\_b] ^^ [true or false]****Routing:** NOS.

Logical, exclusive OR for the case where the first operand is true. This takes on the opposite of the value of the second operand converted to a Boolean value.

Note: Other parts of this method are implemented in the NilClass and FalseClass classes.

Code	Result
false false ^^	false
false true ^^	true
true false ^^	true
true true ^^	false

**[object\_a object\_b] distinct? [true or false]****Routing:** NOS.

Return true if the objects a and b have distinct identities or values, else return false

Code	Result
4 5 distinct?	true
4 4 distinct?	false
"hi" dup distinct?	false
"hi" "ho" distinct?	true
"hi" "hi" distinct?	true

**[an\_object] f"a string" [a\_string]**

Routing: NOS

Create a string version of the object using the embedded formatting string. This is a helper method, see the String and Time classes for more details.

**[an\_object a\_string] format [a\_string]**

Routing: NOS

Create a string version of the object using the specified formatting string. This is a helper method, see the String and Time classes for more details.

**[object\_a object\_b] identical? [true or false]**

Routing: NOS.

Return true if the objects a and b have identical identities and values, else return false

Code	Result
4 5 identical?	false
4 4 identical?	true
"hi" dup identical?	true
"hi" "ho" identical?	false
"hi" "hi" identical?	false

**[object\_a object\_b] max [either object\_a or object\_b]**

Routing: NOS

Return the larger of object\_a or object\_b. The object\_b parameter is coerced to the same type as object\_a for the comparison only. If the objects are equal in value, then object\_b is returned.

Code	Result
4 5 max	5
4 "5" max	"5"
4 2 max	4
4 "apple" max	Cannot coerce a String instance to an Integer instance



**[object\_a object\_b] min [either object\_a or object\_b]****Routing:** NOS

Return the smaller of object\_a or object\_b. The object\_b parameter is coerced to the same type as object\_a for the comparison only. If the objects are equal in value, then object\_b is returned.

Code	Result
4 5 min	4
4 "5" min	4
4 2 min	2
4 "apple" min	Cannot coerce a String instance to an Integer instance

**[an\_object] nil<> [true]****Routing:** TOS

Is this object not equal to nil for the case where the object is not equal to nil. Always true, see NilClass for the flip side of this method.

Code	Result
nil nil<>	false
false nil<>	true
0 nil<>	true
"" nil<>	true

**[an\_object] nil= [false]****Routing:** TOS

Is this object equal to nil for the case where the object is not equal to nil. Always false, see NilClass for the flip side of this method.

Code	Result
nil nil=	true
false nil=	false
0 nil=	false
"" nil=	false

## **[an\_object] not [false]**

**Routing:** TOS

Return the logical opposite for object for the case where the object is true. Always false, see FalseClass and NilClass for the flip sides of this method.

<b>Code</b>	<b>Result</b>
nil not	true
false not	true
true not	false
0 not	false
"" not	false

## **[object\_a object\_b] || [true]**

**Routing:** NOS.

Logical, inclusive OR for the case where the first operand is true. This is true.

Note: Other parts of this method are implemented in the NilClass and FalseClass classes.

<b>Code</b>	<b>Result</b>
false false &&	false
false true &&	true
true false &&	true
true true &&	true

## Commands

### [an\_object] )methods []

**Routing:** TOS.

Display a formatted listing of the methods defined to the given object. This method is very similar to the )methods method defined in Class, except for the labeling of exclusive methods.

```
>[ 3 ] val$: $vv
>$vv .:: .name "Fred" ;

>$vv .name .
Fred
>$vv )methods
Exclusive Methods =
.name

Array Shared Methods =
!      .+midlr  .-midlr  .left   .midlr   .right  <<
+      .+right  .-right  .length .min     .shuffle @
.+left .-left   .[]!    .max    .pp     .sort
.+mid  .-mid   .[]@    .mid    .reverse .strmax
```



# OutStream

Inheritance: OutStream ← Object

```
OutStream Class Methods =
.append    .append{{ .create    .create{{

OutStream Shared Methods =
.         .cr         .space ~         ~cr         ~space
.close   .emit   .spaces ~"         ~emit   ~spaces

OutStream Class Stubs =
.new
```

The OutStream class is used to support the writing of information to files in an accessible file system.

## Class Methods

### [file\_name OutStream] .append [an\_outstream]

Routing: TOS

This method opens the file of the given name for appending. It returns an OutStream instance that may be used for writing data to that file. If the file in question does not exist, it is created. The programmer is responsible for managing that instance at all times. A typical strategy is to use a local value to hold that instance.

Note: The programmer is also responsible for ensuring that the file object is finally closed or data may be lost.

Code	Result
"test.txt" OutStream .append val: wf	(Creates a local value wf with an OutStream instance.)

**[file\_name OutStream] .append{{ ... }} [unspecified]**

Routing: NOS (since the Procedure Literal is TOS)

This is actually a method proxy for OutStream. This method opens the file of the given name for appending, it then executes the embedded procedure literal block ( between {{ and }} ) with self set to the opened file for the duration of the block. Finally it closes the file.

For more information on the methods local to the embedded procedure, see the Procedure class.

Code	Result
<code>"test.txt" OutStream .append{ ~"Hello" ~cr }</code>	(Appends Hello to the file.)

**[file\_name OutStream] .create [an\_outstream]**

Routing: TOS

This method create a file of the given name for output. It returns an OutStream instance that may be used for writing data to that file. If the file in question exists, it is replaced. The programmer is responsible for managing that instance at all times. A typical strategy is to use a local value to hold that instance.

Note: The programmer is also responsible for ensuring that the file object is finally closed or data may be lost.

Code	Result
<code>"test.txt" OutStream .create val: wf</code>	(Creates a local value wf with an OutStream instance.)

**[file\_name OutStream] .create{{ ... }} [unspecified]**

Routing: NOS (since the Procedure Literal is TOS)

This is actually a method proxy for OutStream. This method creates a file of the given name for appending (if the file in question exists, it is replaced), it then executes the embedded procedure literal block ( between {{ and }} ) with self set to the opened file for the duration of the block. Finally it closes the file.

For more information on the methods local to the embedded procedure, see the Procedure class.

Code	Result
<code>"test.txt" OutStream .create{ ~"Hello" ~cr }</code>	(Create file with Hello.)

## Instance Methods

### **[an\_object an\_outstream] . []**

Routing: TOS

Print out the object to the output stream using the default formatting.

Code	Result
<code>42 wf .</code>	(Writes "42" to the output)

### **[an\_outstream] .close []**

Routing: TOS

Close the output stream object. After this, the file will not accept further data.

Code	Result
<code>wf .close</code>	(Close the file.)
<code>"Hello" wf .</code>	IOError detected: closed stream (See told ya!)

### **[an\_outstream] .cr []**

Routing: TOS

Add a new-line character to the output stream.

Code	Result
<code>wf .cr</code>	(Adds a new-line character to the output)

### **[a\_number an\_outstream] .emit [after]**

Routing: TOS

Emits the number as a character to the output stream.

Code	Result
<code>65 wf .emit</code>	(Adds a letter "A" to the output)

### [an\_outstream] .space []

Routing: TOS

Adds a space to the output stream.

Code	Result
<code>wf .space</code>	(Adds a space to the output)

### [count an\_outstream] .spaces []

Routing: TOS

Adds the specified number of spaces to the output stream.

Code	Result
<code>5 wf .spaces</code>	(Adds five spaces to the output)

### [an\_object] ~ []

Routing: Self

Print out the object to the output stream using the default formatting.

Code	Result
<code>42 ~</code>	(Writes "42" to the output)

### [] ~" ... " []

Routing: Self

Print out the embedded string to the output stream.

Code	Result
<code>~"Hello"</code>	(Writes "Hello" to the output)



### **[] ~cr []**

Routing: Self

Add a new-line character to the output stream.

<b>Code</b>	<b>Result</b>
<code>~cr</code>	(Adds a new-line character to the output)

### **[a\_number] ~emit []**

Routing: Self

Emits the number as a character to the output stream.

<b>Code</b>	<b>Result</b>
<code>65 ~emit</code>	

### **[] ~space []**

Routing: Self

Adds a space to the output stream.

<b>Code</b>	<b>Result</b>
<code>~space</code>	(Adds a space to the output)

### **[count] ~spaces []**

Routing: Self

Adds the specified number of spaces to the output stream.

<b>Code</b>	<b>Result</b>
<code>5 ~spaces</code>	(Adds five spaces to the output)

## ***Class Stubs***

The following method is stubbed out as it is not supported by the OutputStream class.

`.new`



# Procedure

Inheritance: Procedure ← Object

```
Procedure Shared Methods =
.call          .call_vx      .call_x      .start_named
.call_v       .call_with    .start

Helper Methods =
{{
```

The procedure class is used to represent anonymous methods, not tied to either the virtual machine or any object. They are objects in and of themselves and can be passed as arguments to methods or returned as values from methods.

## Procedure Literals

Procedure literals are supported by the virtual machine method “{{” and a locally defined method “}}”. The general usage is:

```
{{ (procedure body) }}
```

To be clear on the semantics involved: execution of a procedure literal pushes an instance of a procedure object onto the stack.

A valid management strategy is to place these procedures into values. For example:

```
{{ dup * }} var$: $proc
```

## Procedure Literal Methods

⌈ {{ ⌋

Routing: VM

This method opens the definition of a procedure literal. After the opening {{, the code that makes up the body of the procedure should be found.

Code	Result
4 {{ dup + }} .call	8

**Local Methods:**

**[] v [value or nil]**

Routing: Compiler Context.

In those contexts with a defined value, this method retrieves that value. When no such value exists, nil is returned.

Code	Result
[ 1 2 3 ] .map{{ v dup * }}	[ 1 4 9 ]
{{ v }} .call	nil

**[] x [index or nil]**

Routing: Compiler Context.

In those contexts with a defined index, this method retrieves that index. When no such value exists, nil is returned.

Code	Result
[ 1 2 3 ] .map{{ x dup * }}	[ 0 1 4 ]
{{ x }} .call	nil

**[] ... }} [a\_procedure]**

Routing: Compiler Context.

This method closes off the procedure literal context and delivers the resulting procedure object to the stack.

Code	Result
{{ dup + }} .name	"Procedure instance"

**Instance Methods****[ unspecified a\_procedure ] .call [unspecified]**

Routing: TOS

Call the code in the procedure. The current self value is used as the self value of the procedure.

Code	Result
3 \$proc (see above) .call	6

**[ unspecified v a\_procedure ] .call\_v [unspecified]**

Routing: TOS

Call the code in the procedure. The current self value is used as the self value of the procedure. In addition, a value (shown as “v” above) is passed into the the procedure and is accessible as via the v method.

Code	Result
4 {{ v dup + }} .call_v	8

**[ unspecified v x a\_procedure ] .call\_vx [unspecified]**

Routing: TOS

Call the code in the procedure. The current self value is used as the self value of the procedure. In addition, two values (shown as “v” and “x” above) are passed into the the procedure and is accessible as via the v and x methods.

Code	Result
5 4 {{ v x 2dup + }} .call_vx	5 4 9

**[ unspecified owner a\_procedure ] .call\_with [unspecified]**

Routing: TOS

Call the code in the procedure with the self value of that procedure set to the owner object.

Code	Result
4 {{ self dup + }} .call_with	8

**[ unspecified v x a\_procedure ] .call\_x [unspecified]**

Routing: TOS

Call the code in the procedure. The current self value is used as the self value of the procedure. In addition, a value (shown as “x” above) is passed into the the procedure and is accessible as via the x method.

Code	Result
4 {{ x dup + }} .call_x	8

### **[unspecified a\_procedure] .start [unspecified a\_thread]**

Routing: TOS

Start the procedure object in its own thread. Any additional data on the stack is copied to the stack of the new virtual machine created with the new thread instance.

Note: The caller is responsible for removing or otherwise dealing with the additional data.

<b>Code</b>	<b>Result</b>
<code>3 {{ \$proc .call . }} .start</code>	<code>#&lt;Thread:0XXXXXXXX&gt; (Prints out 6)</code>

### **[unspecified a\_string a\_procedure] .start\_named [unspecified a\_thread]**

Routing: TOS

Start the procedure object in its own named thread. Any additional data on the stack is copied to the stack of the new virtual machine created with the new thread instance.

Note: The caller is responsible for removing or otherwise dealing with the additional data. The thread name however is removed by the method.

<b>Code</b>	<b>Result</b>
<code>"Fred" {{ vm .vm_name . }} .start</code>	<code>#&lt;Thread:0XXXXXXXX&gt; (Prints out Fred)</code>

# Queue

Inheritance: Queue ← Object

```
Queue Shared Methods =  
.clear .empty? .length .pend .pop .push
```

The queue class implements a data “pipeline” which permits data objects to be inserted into the queue and retrieved from the queue in the order they were inserted. Queues are especially useful in buffering data for use by a producer thread to a consumer thread.

Queue objects are created using the default implementation of the .new method in the Object class.

## *Instance Methods*

### **[a\_queue] .clear []**

Routing: TOS

This method removes the data elements from the queue.

Code	Result
@q .clear	(The queue is cleared.)

### **[a\_queue] .empty? [a\_boolean]**

Routing: TOS

Is this queue empty?

Code	Result
@q .empty?	true or false

### **[a\_queue] .length [count]**

Routing: TOS

How many data elements reside in the queue?

<b>Code</b>	<b>Result</b>
@q .length	Count

### **[a\_queue] .pend [an\_object]**

Routing: TOS

Wait for a data element in the queue. This method is intended for use by a “consumer” thread and enables it to wait for data to process from a “producer” thread.

Warning: If this operation creates a deadlock this may result in a fatal error or a program lock-up.

<b>Code</b>	<b>Result</b>
@q .pend	an_object

### **[a\_queue] .pop [an\_object]**

Routing: TOS

Get a data element from the queue.

Note: If the queue is empty when this method is invoked, an error is raised.

<b>Code</b>	<b>Result</b>
@q .pop	an_object
@q .pop	F31: Queue Underflow: .pop

### **[an\_object a\_queue] .push []**

Routing: TOS

Add a data element to the queue.

<b>Code</b>	<b>Result</b>
42 @q .push	(The data 42 is added to the queue)



# Rational

Inheritance: Rational ← Numeric ← Object

```
Rational Shared Methods =  
.split
```

```
Helper Methods =  
.to_r      .to_r!      rational  .rationalize_to
```

Rational numbers<sup>84</sup> are those numbers that may be represented as  $a/b$  where  $a$  and  $b$  are both integers. Since rational numbers are implemented with fOOth integers, they are not subject to (most) sizing restrictions and can thus represent numbers large and small with no loss of precision. Rational numbers inherit most of their methods from the Numeric class.

## Rational Literals

Rational literals are supported directly by the compiler. Any number with an embedded '/' is considered to be a rational number. The regular expression detecting potential rational numbers is:

```
/\d\/\d/
```

Some example values follow:

Literal <sup>85</sup>	Value <sup>86</sup>
1/2	1/2
1.2/3	2/5

## Instance Methods

**[a\_rational] .split [numerator denominator]**

**Routing:** TOS.

Split a rational number into its two component parts.

Code	Result
1/2 .split	1 2
3/4 .split	3 4

<sup>84</sup> See [http://en.wikipedia.org/wiki/Rational\\_number](http://en.wikipedia.org/wiki/Rational_number)

<sup>85</sup> No spaces are permitted within the literal.

<sup>86</sup> The numerator may be an integer or a float, the denominator must be an integer. See the respective sections for more details on those types of literals.

**[an\_object] .to\_r [a\_rational or nil]****Routing:** TOS

Try to convert the object into a Rational. If this is not possible, return nil. Contrast with .to\_r!  
This is a helper method of the Object class.

Code	Result
2 .to_r	2/1
2.5 .to_r	5/2
"2.5" .to_r	5/2
"5/2" .to_r	5/2
"apple" .to_r	nil

**[an\_object] .to\_r! [a\_rational]****Routing:** TOS

Try to convert the object into a Rational. If this is not possible, raise an error. Contrast with .to\_r!  
This is a helper method of the Object class.

Code	Result
2 .to_r!	2/1
2.5 .to_r!	5/2
"2.5" .to_r!	5/2
"5/2" .to_r!	5/2
"apple" .to_r!	Cannot convert a String instance to a Rational instance

### **[numerator denominator] rational [a\_rational]**

Routing: VM

This is a helper method of the Virtual Machine class. Given a numerator and denominator, create a rational number. This method is quite flexible in accepting a wide variety of numeric input. If, for some reason, the conversion cannot be performed, nil is returned.

<b>Code</b>	<b>Result</b>
3 4 rational	3/4
3.5 4 rational	7/8
4 3.5 rational	8/7
1+2i 3 rational	1/3+2/3i
3.1 4 rational	31/40
"apple" 3 rational	nil

### **[numerator denominator] rational! [a\_rational]**

Routing: VM

This is a helper method of the Virtual Machine class. Given a numerator and denominator, create a rational number. This method is quite flexible in accepting a wide variety of numeric input. If, for some reason, the conversion cannot be performed, an error occurs.

<b>Code</b>	<b>Result</b>
3 4 rational!	3/4
3.5 4 rational!	7/8
4 3.5 rational!	8/7
1+2i 3 rational!	1/3+2/3i
3.1 4 rational!	31/40
"apple" 3 rational!	F40: Cannot coerce a String instance, Fixnum instance to a Rational

**[error\_float a\_numeric] .rationalize\_to [a\_rational]**

Routing: TOS

Convert a numeric into the simplest rational with an error not greater than the error\_float. If this is not possible, an error is generated.

This is a helper method of the Numeric class.

<b>Code</b>	<b>Result</b>
0.01 pi .rationalize_to	22/7
0.001 pi .rationalize_to	201/64
0.01 1234/55 .rationalize_to	157/7
0.001 1234/55 .rationalize_to	875/39
0.01 1+5i .rationalize_to	F20: A Complex instance does not understand .rationalize_to (:_156).

# Stack

Inheritance: Stack ← Object

```
Stack Shared Methods =  
.clear .empty? .length .peek .pop .push
```

The stack class implements a data “well” which permits data objects to be inserted into the stack and retrieved in the reverse of the order they were inserted. Stacks are *not* thread safe and should not be used to communicate between threads.

Stack objects are created using the default implementation of the `.new` method in the Object class.

## Instance Methods

### **[a\_stack] .clear []**

Routing: TOS

Clear out the data elements of the stack.

Code	Result
@s .clear	(The stack is cleared)

### **[a\_stack] .empty? [a\_boolean]**

Routing: TOS

description

Code	Result
@s .empty?	true or false

### **[a\_stack] .length [count]**

Routing: TOS

How many data elements are in this stack?

Code	Result
@s .length	count

### [a\_stack] .peek [an\_object]

Routing: TOS

Peek at the top-of-stack data element without removing it. Note that if there is no element to peek at, an error is thrown.

Code	Result
@s .peek	an_object
@s .peek	F31: Stack Underflow: .peek

### [a\_stack] .pop [an\_object]

Routing: TOS

Get the top-of-stack data element. Note that if there is no element to get, an error is thrown.

Code	Result
@s .pop	an_object
@s .pop	F31: Stack Underflow: .pop

### [an\_object a\_stack] .push []

Routing: TOS

Push a data element onto the stack

Code	Result
42 @s .push	(Push 42 onto the stack)

# String

Inheritance: String ← Object

```
String Shared Methods =
*      .-left      .each{{      .load      .right      .throw      <=
+      .-mid       .emit       .rstrip     .right?     .to_lower   <=>
."     .-midlr     .left       .mid        .rjust      .to_t       >
.+left .-right      .left?     .mid?       .rstrip     .to_t!     >=
.+mid  .call        .length    .midlr     .shell      .to_upper
.+midlr .cjust      .lines     .posn      .split      <
.+right .contains? .ljust     .reverse   .strip      <<

Helper Methods =
.to_s      "          format      format"
```

The String class provides a wide range of character and string manipulating capabilities.

## String Literals

String literals are directly supported by the compiler. Any method with a " character in it contains an embedded string literal. See String Literals in The Syntax and Style of fOOrth above. The most basic string literal uses a virtual machine macro ", but all methods with embedded strings work in a similar manner. It is illustrated below.

```
"string contents go here"
```

Within the string literal, characters usually represent themselves, but there are exceptions to this called escape sequences. Escape sequences allow the string literal to contain characters that do not fit the normal rules. These are shown below:

Escape Sequence	Interpretation
\ "	A single " character
\\	A single \ character
\ <sup>87</sup>	The string is continued on next line.
\n	A newline character.
\xFF <sup>88</sup>	An 8 bit character value.
\uFFFF <sup>89</sup>	A 16 bit character value.

<sup>87</sup> This is a backslash character followed by the end-of-line character(s).

<sup>88</sup> The FF represents a two digit hexadecimal value.

<sup>89</sup> The FFFF represents a four digit hexadecimal value.

## Embedded String Literals

Any method ending with a double quote mark (") will contain an embedded string literal. In effect the string value contained therein becomes an argument of the method that contains it.

It is important to understand that in methods with embedded strings, that string is pushed onto the stack *before* the method is invoked. Thus the top-of-stack will always be that string literal.

## Multi-line String Literals

In fOOrth, string literals can span multiple lines by use of the backslash (\) character. In order for this to work, the backslash character needs to be the last character on the line. The string literal then picks up on the next line at the first non-blank character. For example:

```
> show

[]
> "4567\

[]
> " 666"

["4567666"]
```

Note first how leading spaces on the continuation line are removed. Also note how a " is added to the prompt to remind the user that a string is in the process of being entered.

## Lazy String Literals

A special case exists where a string is started on a line, and neither terminated with a closing double quote mark or a line extension mark, backslash. In this case, the fOOrth language performs a lazy string termination, closing the string and removing any trailing blank characters. This is shown below:

```
> "Test

> .
Test
> "ls
Gemfile          demo.rb          fOOrth.reek    license.txt    rdoc          t.txt
Gemfile.lock     docs             integration    pkg            reek.txt     test.foorth
README.md        fOOrth.gemspec  lib           rakefile.rb   sire.rb      tests
```

## Format Strings

The string formatting facility is a direct transplant of the Ruby mechanisms for the same<sup>90</sup>. A format string is a string with optional text and zero or more format sequences. The data being formatted may be in one of two forms. Either a discrete object or an array<sup>91</sup> of objects may be formatted, however, a lone object may only be used if the formatting string contains no more

---

<sup>90</sup> The documentation for this feature is largely taken from the Ruby1.9.3-p448 Core API Reference.

<sup>91</sup> Ruby supports formatting data from hashes, but fOOrth does not.



than one format sequence. The structure of a format sequence is shown below with elements in brackets representing optional components.

```
%[flags][width][.precision]type
```

The type parameter is a single character that describes the data being formatted. There are three major groups of types: Integer, Float, and Other.

### Integer Format Types

Type	Format Description
b	Convert argument as a binary number. Negative numbers will be displayed as a two's complement prefixed with '..1'.
B	Equivalent to 'b', but uses an uppercase 0B for prefix if the alternative format indicated by # is active.
d	Convert argument as a decimal number.
i	Identical to 'd'.
o	Convert argument as an octal number. Negative numbers will be displayed as a two's complement prefixed with '..7'.
u	Identical to 'd'.
x	Convert argument as a hexadecimal number. Negative numbers will be displayed as a two's complement prefixed with '..f' (representing an infinite string of leading 'ff's).
X	Equivalent to 'x', but uses uppercase letters.

### Float Format Types

Type	Format Description
e	Convert floating point argument into exponential notation with one digit before the decimal point as [-]d.dddddde[+-]dd. The precision specifies the number of digits after the decimal point (defaulting to six).
E	Equivalent to 'e', but uses an uppercase E to indicate the exponent.
f	Convert floating point argument as [-]ddd.ddddd, where the precision specifies the number of digits after the decimal point.
g	Convert a floating point number using exponential form if the exponent is less than -4 or greater than or equal to the precision, or in dd.dddd form otherwise. The precision specifies the number of significant digits.
G	Equivalent to 'g', but use an uppercase 'E' in exponent form.
a	Convert floating point argument as [-]0xh.hhhhp[+-]dd, which is consisted from optional sign, "0x", fraction part as hexadecimal, "p", and exponential part as decimal.
A	Equivalent to 'a', but use uppercase 'X' and 'P'.

## Other Format Types

Type	Format Description
c	Argument is the numeric code for a single character or a single character string itself.
p	Convert the argument to a string using the Ruby argument.inspect.
s	Argument is a string to be substituted. If the format sequence contains a precision, at most that many characters will be copied.
%	A percent sign itself will be displayed. No argument taken. That is %% displays as a single % sign.

## Formatting Flags

The flags are zero or more optional characters that modify how the formatting is done. Flags tend to be specific to certain types.

Flag	Applies to:	Description
space	Integer or Float	Leave a space at the start of non-negative numbers. For 'o', 'x', 'X', 'b' and 'B', use a minus sign with absolute value for negative values.
(digit)\$	All	Specifies the absolute argument number for this field. Absolute and relative argument numbers cannot be mixed in a format string.
#	BboxX aAeEfgG	Use an alternative format. For the conversions 'o', increase the precision until the first digit will be '0' if it is not formatted as complements. For the conversions 'x', 'X', 'b' and 'B' on non-zero, prefix the result with "0x", "0X", "0b" and "0B", respectively. For 'a', 'A', 'e', 'E', 'f', 'g', and 'G', force a decimal point to be added, even if no digits follow. For 'g' and 'G', do not remove trailing zeros.
+	Integer or Float	Add a leading plus sign to non-negative numbers. For 'o', 'x', 'X', 'b' and 'B', use a minus sign with absolute value for negative values.
-	All	Left-justify the result of this conversion.
0	Integer or Float	Pad with zeros, not spaces. For 'o', 'x', 'X', 'b' and 'B', radix-1 is used for negative numbers formatted as complements.
*	All	Use the next argument as the field width. If negative, left-justify the result. If the asterisk is followed by a number and a dollar sign, use the indicated argument as the width.

The width is an optional numeric value that specifies the minimum size of the formatting field. Finally the optional precision specification is used to specify the number of digits past the decimal point for floating point data.

## Examples

The following illustrates a very few of the possible formatting options:

Code	Result
1234 f"%10d"	" 1234"
1234 f"%-10d"	"1234 "
1234 f"%010d"	"0000001234"
1234 f"%x"	"4d2"
1234 f"%X"	"4D2"
1234 f"%#x"	"0x4d2"
1234 f"%#X"	"0X4D2"
12.34 f"%f"	"12.340000"
12.34 f"%0.2f"	"12.34"
12.34 f"%6.2f"	" 12.34"
12.34e6 f"%g"	"1.234e+07"
12.34e6 f"%#g"	"1.23400e+07"
"Hello World" f"%s"	"Hello World"
"Hello World" f"%15s"	" Hello World"
"Hello World" f"%15.5s"	" Hello"
[ 5 100 ] f"%*d"	" 100"
[ 6 2 12.34 ] f"%*. *f"	" 12.34"
100 f"% 4d%"	" 100%"
-100 f"% 4d%"	"-100%"

## Instance Methods

### [a\_string count] \* [a\_string]

Routing: NOS

Create a string with the original string repeated count times

Note: The original string is *not* mutated by this operation.

Code	Result
"*" 10 *	"*****"
"Knock Knock Penny " 3 *	"Knock Knock Penny Knock Knock Penny Knock Knock Penny "

### [a\_string an\_object] + [a\_string]

Routing: NOS

Create a new string that is the concatenation of the original string and the object, converted to a string if needed.

Note: The original string is *not* mutated by this operation.

Code	Result
"Hello " "World" +	"Hello World"
"Hello " 42 +	"Hello 42"

### [] ."a string" []

Routing: TOS

Print the embedded string.

Code	Result
."Hello World"	(Prints Hello World)

### **[width an\_object a\_string] .+left [a\_string]**

Routing: TOS

Replace width characters on the left part of the string with the object, converted to a string if needed.

Note: The original string is *not* mutated by this operation.

<b>Code</b>	<b>Result</b>
3 "123" "abcdefg" .+left	"123defg"
2 4552 "XX is the answer" .+left	"4552 is the answer"

### **[posn width an\_object a\_string] .+mid [a\_string]**

Routing: TOS

Replace width characters, starting at posn of the string with the object, converted to a string if needed.

Note: The original string is *not* mutated by this operation.

<b>Code</b>	<b>Result</b>
3 2 "XXXX" "abcdefgh" .+mid	"abcXXXXfgh"

### **[left\_posn right\_posn an\_object a\_string] .+midlr [a\_string]**

Routing: TOS

Replace the characters, starting at left\_posn and ending at right\_posn (counted from the right), of the string with the object, converted to a string if needed.

Note: The original string is *not* mutated by this operation.

<b>Code</b>	<b>Result</b>
3 3 "XXXX" "abcdefgh" .+midlr	"abcXXXXfgh"

**[width an\_object a\_string] .+right [a\_string]**

Routing: TOS

Replace width characters on the right part of the string with the object, converted to a string if needed.

Note: The original string is *not* mutated by this operation.

Code	Result
3 "123" "abcdefg" .+right	"abcd123"

**[width a\_string] .-left [a\_string]**

Routing:

Remove the width characters from the left of the string.

Note: The original string is *not* mutated by this operation.

Code	Result
3 "abcdefg" .-left	"defg"

**[posn width a\_string] .-mid [a\_string]**

Routing: TOS

Remove width characters from the string starting at the specified position.

Note: The original string is *not* mutated by this operation.

Code	Result
2 4 "abcdefg" .-mid	"abg"

**[left\_posn right\_posn a\_string] .-midlr [a\_string]**

Routing: TOS

Delete the characters, starting at left\_posn and ending at right\_posn (counted from the right), of the string.

Note: The original string is *not* mutated by this operation.

Code	Result
1 1 "abcdefg" .-midlr	"ag"

**[width a\_string] .-right [a\_string]**

Routing: TOS

Delete width characters from the right of the string.

Note: The original string is *not* mutated by this operation.

Code	Result
2 "abcdefg" .-right	"abcde"

**[a\_string] .call [unspecified]**

Routing: TOS

Execute the string as code.

Note: This method can be a source of security problems, especially if the string being executed contains user input.

Code	Result
"2 7 +" .call	9

**[width a\_string] .cjust [a\_string]**

Routing: TOS

Create a string with the given string centered in a field of the specified width.

Note: The original string is *not* mutated by this operation.

Code	Result
10 "abcd" .cjust	" abcd "

**[sub\_string a\_string] .contains? [a\_boolean]**

Routing: TOS

Return true if a\_string contains the sub\_string, else return false.

Code	Result
"bcd" "abcdefg" .contains?	true
"b3d" "abcdefg" .contains?	false

## **[a\_string].each{{ ... }} []**

Routing: NOS (since the Procedure Literal is TOS)

This method is the string iterator. It processes each character in the string in turn, calling the embedded procedure literal block ( between {{ and }} ) with the character value (v) and index (x) of the current array item.

For more information on the methods local to the embedded procedure, see the Procedure class.

<b>Code</b>	<b>Result</b>
"Hello" .each{ v x + . space }	(Prints out H0 e1 l2 l3 o4)
"Hello" .each{ v dup + . space }	(Prints out HH ee ll ll oo)
"Hello" .each{ x . space }	(Prints out 0 1 2 3 4)

## **[a\_string].emit []**

Routing: TOS

Print the first character of the string

<b>Code</b>	<b>Result</b>
"abcd" .emit	(Prints "a")

## **[width a\_string].left [a\_string]**

Routing: TOS

This method returns the left most width characters from the string.

Note: The original string is *not* mutated by this operation.

<b>Code</b>	<b>Result</b>
2 "abcdefg" .left	"ab"



### [sub\_string a\_string] .left? [a\_boolean]

Routing: TOS

This method determines if the string starts with the sub-string.

Code	Result
"abc" "abcdefg" .left?	true
"ab3" "abcdefg" .left?	false

### [a\_string] .length [count]

Routing: TOS

How many characters are in this string? Note that this count is of characters and not bytes.

Code	Result
"abc" .length	3
"ab\uFFFFc" .length	4

### [a\_string] .lines [a\_array]

Routing: TOS

This method takes a string with optional embedded line feeds and produces an array of strings broken at those line feeds.

Note: The array strings do *not* contain any line feed characters.

Code	Result
"qwer" .lines	["qwer"]
"qwer\nasdf\nzxcv\n" .lines	["qwer", "asdf", "zxcv"]
"qwer\nasdf\nzxcv" .lines	["qwer", "asdf", "zxcv"]

### [width a\_string] .ljust [a\_string]

Routing: TOS

Create a string with the given string left justified in a field of the specified width.

Note: The original string is *not* mutated by this operation.

Code	Result
10 "abcd" .ljust	"abcd "

### [a\_string] .load [unspecified]

Routing: TOS

This method loads the file with the name given in the string. If no file type is specified, a type of ".forth" is used as the default. The file is interpreted as fOOrth source code.

Note: This command is similar to the command )load" name" except that it does not report or provide feedback to the console.

Code	Result
"docs/snippets/times_table" .load	(loads the file times_table.forth)

### [a\_string] .lstrip [a\_string]

Routing: TOS

This method strips of any leading spaces on the left of the string

Note: The original string is *not* mutated by this operation.

Code	Result
" abc " .lstrip	"abc "

### [posn width a\_string] .mid [a\_string]

Routing: TOS

This method extracts width characters starting at the specified position in the string.

Note: The original string is *not* mutated by this operation.

Code	Result
3 2 "abcdefg" .mid	"de"

### [posn sub\_string a\_string] .mid? [a\_boolean]

Routing: TOS

Return true if a\_string contains the sub\_string at the indicated position. Otherwise return false.

Code	Result
2 "cde" "abcdefgh" .mid?	true
3 "cde" "abcdefgh" .mid?	false

### **[left\_posn right\_posn a\_string] .midlr [a\_string]**

Routing: TOS

This method extracts width characters starting left\_posn and ending at right\_posn (counted from the end of the string) from the specified string.

Note: The original string is *not* mutated by this operation.

<b>Code</b>	<b>Result</b>
2 2 "abcdefgh" .midlr	"cdef"

### **[sub\_string a\_string] .posn [a\_posn or nil]**

Routing: TOS

This method returns the first position that sub\_string occurs within the specified string. If the sub\_string does *not* occur, then nil is returned.

<b>Code</b>	<b>Result</b>
"cde" "abcdefgh" .posn	2
"cdx" "abcdefgh" .posn	nil

### **[a\_string] .reverse [a\_string]**

Routing: TOS

Create a new string with the characters reversed.

Note: The original string is *not* mutated by this operation.

<b>Code</b>	<b>Result</b>
"Able was I ere I saw Elba" .reverse	"ablE was I ere I saw elbA"
"pup" .reverse	"pup"
"dog" .reverse	"god"

### **[width a\_string] .right [a\_string]**

Routing: TOS

Return the width number of characters at the end (right side) of the string.

Note: The original string is *not* mutated by this operation.

<b>Code</b>	<b>Result</b>
3 "abcdefgh" .right	"fgh"

### **[sub\_string a\_string] .right? [a\_boolean]**

Routing: TOS

Does the string end with the characters of sub\_string?

<b>Code</b>	<b>Result</b>
"fgh" "abcdefgh" .right?	true
"f4h" "abcdefgh" .right?	false

### **[width a\_string] .rjust [a\_string]**

Routing: TOS

Create a string with the given string right justified in a field of the specified width.

Note: The original string is *not* mutated by this operation.

<b>Code</b>	<b>Result</b>
10 "abcd" .rjust	" abcd"

### **[a\_string] .rstrip [a\_string]**

Routing: TOS

This method strips of any trailing spaces on the right of the string

Note: The original string is *not* mutated by this operation.

<b>Code</b>	<b>Result</b>
" abc " .rstrip	" abc"

### **[a\_string] .split [an\_array]**

Routing: TOS

Given a string, create an array of strings by splitting along spaces. Multiple spaces still create only one split.

Note: The original string is *not* mutated by this operation.

<b>Code</b>	<b>Result</b>
"abc def 123" .split	["abc", "def", "123"]
"abc def 123" .split	["abc", "def", "123"]
"abcdef123" .split	["abcdef123"]

### **[a\_string] .strip [a\_string]**

Routing: TOS

Create a string with leading and trailing spaces removed.

Note: The original string is *not* mutated by this operation.

<b>Code</b>	<b>Result</b>
" abc " .strip	"abc"

### **[a\_string] .throw []**

Routing: TOS

Signal an exception.

Note: This method is similar to the Virtual Machine method throw".

<b>Code</b>	<b>Result</b>
"A35: Grundle Skew Error" .throw	(Throws an error A35)

### **[a\_string] .to\_lower [a\_string]**

Routing: TOS

Create a new string with all the characters converted to lower case.

Note: The original string is *not* mutated by this operation.

<b>Code</b>	<b>Result</b>
"AbCd" .to_lower	"abcd"

**[an\_object] .to\_s [a\_string]****Routing:** TOS

Convert the object to a string. This is a helper method of the Object class.

Code	Result
2 .to_s	"2"
2.5 .to_s	"2.5"
5/2 .to_s	"5/2"
"apple" .to_s	"apple"

**[string] .to\_t [a\_time]****Routing:** TOS

Convert the string to a time object. This is a helper method for the Time class.

**[string] .to\_t! [a\_time]****Routing:** TOS

Convert the string to a time object. This is a helper method for the Time class.

**[a\_string] .to\_upper [a\_string]****Routing:** TOS

Create a new string with all the characters converted to upper case.

Note: The original string is *not* mutated by this operation.

Code	Result
"AbCd" .to_upper	"ABCD"

**[a\_string a\_string] < [a\_boolean]**

Routing: NOS

Is the first string less than the second one?

Code	Result
"B" "A" <	false
"B" "B" <	false
"A" "B" <	true

**[a\_string an\_object] << [a\_string]**

Routing: NOS

Append the string representation of the object onto the first string

Note: The original string *is* mutated by this operation.

Code	Result
"ABC" "DEF" <<	"ABCDEF"
"ABC" 42 <<	"ABC42"

**[a\_string a\_string] <= [a\_boolean]**

Routing: NOS

Is the first string less than or equal to the second one?

Code	Result
"B" "A" <=	false
"B" "B" <=	true
"A" "B" <=	true

**[a\_string a\_string] <=> [1, 0, -1]**

Routing: NOS

Perform a “three outcome” comparison of the first value with the second value.

Code	Result
"B" "A" <=>	1
"B" "B" <=>	0
"A" "B" <=>	-1

**[a\_string a\_string] > [a\_boolean]**

Routing: NOS

Is the first string greater than the second one?

Code	Result
"B" "A" >	true
"B" "B" >	false
"A" "B" >	false

**[a\_string a\_string] >= [a\_boolean]**

Routing: NOS

Is the first string greater than or equal to the second one?

Code	Result
"B" "A" >=	true
"B" "B" >=	true
"A" "B" >=	false



### **[an\_object] f"a format string" [a\_string]**

Routing: NOS

Create a string version of the object using the embedded formatting string. The code:

```
f"format string"
```

is short for:

```
"format string" format
```

This shorter form is generally more convenient except in those cases where the format string must be computed or retrieved from storage. See Format Strings above for more details. This is a helper method of the Object class.

<b>Code</b>	<b>Result</b>
1234 f"%X"	"4D2"
[ 23 45 ] f"%X %X"	"17 2D"

### **[an\_object a\_format\_string] format [a\_string]**

Routing: NOS

Create a string version of the object using the specified formatting string.

See Format Strings above for more details. This is a helper method of the Object class.

<b>Code</b>	<b>Result</b>
1234 "%X" format	"4D2"
[ 23 45 ] "%X %X" format	"17 2D"



# Thread

Inheritance: Thread ← Object

```
Thread Class Methods =  
.current .list .main .new{  
  
Thread Shared Methods =  
.alive? .exit .join .status .vm  
  
Helper Methods =  
.sleep .start pause  
  
Thread Class Stubs =  
.new
```

The Thread class is largely used to facilitate the management of the threads in a multi-threaded application. It also provides methods to access the main thread and to retrieve the virtual machine of a given thread.

## Class Methods

### [Thread] .current [a\_thread]

Routing: TOS

Get the current thread.

Code	Result
Thread .current	#<Thread:0XXXXXXXX>

### [Thread] .list [an\_array]

Routing: TOS

Get a array of all currently running threads.

Code	Result
Thread .list	[#<Thread:0XXXXXXXX run>]

### **[Thread] .main [a\_thread]**

Routing: TOS

Get the main (first) thread of this application.

<b>Code</b>	<b>Result</b>
<code>Thread .main</code>	<code>#&lt;Thread:0XXXXXXXX&gt;</code>

### **[a\_string Thread] .new{{ ... }} [a\_thread]**

Routing: NOS (since the Procedure Literal is TOS)

This method is used to create a named thread with the name coming from the string and the body specified in the embedded procedure literal block bound by `{{ ... }}`. The thread is returned to the caller.

For more information on the methods local to the embedded procedure, see the Procedure class.

<b>Code</b>	<b>Result</b>
<code>"Fred" Thread .new{ 5 .sleep }</code>	<code>#&lt;Thread:0XXXXXXXX&gt;</code>

## ***Instance Methods***

### **[a\_thread] .alive? [a\_boolean]**

Routing: TOS

Is the thread argument alive? Returns true if it else and false if not.

<b>Code</b>	<b>Result</b>
<code>Thread .current .alive?</code>	<code>true</code>

### **[a\_thread] .exit []**

Routing: TOS

Instruct the thread argument to exit.

<b>Code</b>	<b>Result</b>
<code>Thread .current .exit</code>	<code>(The thread exits)</code>

### **[a\_thread] .join []**

Routing: TOS

Wait for the specified thread to exit.

<b>Code</b>	<b>Result</b>
<code>"Fred" Thread .new{ 5 .sleep } .join</code>	(Waits five seconds for the thread to exit)

### **[a\_numeric] .sleep []**

Routing: TOS

This method will put the current thread to sleep for the specified number of seconds.

This is a helper of the Numeric class.

<b>Code</b>	<b>Result</b>
<code>1 .sleep</code>	(Sleep for one second)
<code>0.1 .sleep</code>	(Sleep for one tenth of a second)
<code>1/1000 .sleep</code>	(Sleep for one millisecond)

### **[unspecified a\_procedure] .start [a\_thread]**

Routing: TOS

Start the procedure object in its own thread. Any additional data on the stack is copied to the stack of the new virtual machine created with the new thread instance.

This is a helper method of the Procedure class.

<b>Code</b>	<b>Result</b>
<code>3 {{ \$proc .call . }} .start</code>	<code>#&lt;Thread:0x211f2a8&gt;</code> (Prints out 6)

### **[a\_thread] .status [a\_string]**

Routing: TOS

Get the status of the specified thread as a string

<b>Code</b>	<b>Result</b>
<code>Thread .current .status</code>	<code>"run"</code>

## **[a\_thread] .vm [a\_virtual\_machine]**

Routing: TOS

Retrieve the virtual machine associated with the thread.

<b>Code</b>	<b>Result</b>
<code>{{ Thread .list . }} .start .vm</code>	<code>#&lt;XfOOrth::VirtualMachine:0x1bb6898&gt;</code>

## **[] pause []**

Routing: VM

This method causes the current thread to pause briefly to allow a chance for other threads to run.

This is a helper method of the Virtual Machine.

<b>Code</b>	<b>Result</b>
<code>pause</code>	<code>(The thread pauses briefly)</code>

# Time

Inheritance: Time ← Object

```
Time Class Methods =
p!"          p"          parse          parse!

Time Shared Methods =
+          .as_zone  .minute  .second  .to_t!  <=      f"
-          .day      .month   .time_s  .utc?   <=>     format
.as_local .fraction .offset  .to_a   .year   >
.as_utc   .hour     .sec_frac .to_t   <       >=

Helper Methods =
.to_t      local_offset  now

Time Class Stubs =
.new
```

The Time class is used to represent values of dates, times, and fractions of seconds. Times are represented internally as a number of seconds (and possibly fractions of seconds) since the initial time value (January 1, 1970 00:00 UTC). To be clear, the Time class is designed to operate in the current time frame. Attempting to use it for historical date references will likely yield incorrect results<sup>92</sup>.

## Creating Time Values

The Time class does not have a literal representation. In addition, the .new method is not supported. Time values are created by one of two strategies:

1. Using a special helper method, now, to create a time object for the present. See the now method in the section Special Time Values below.
2. Converting other values into time values with the “.to\_t” and “.to\_t!” methods. Both of these methods convert their argument value into a time value. If this is not possible, the “to\_t” method returns nil while the “to\_t!” method generates an error. The supported forms of conversion are listed below:

Source Type: A Numeric <sup>93</sup>
Example: 1434322201 .to_t
Value: 2015-06-14 18:50:01 -0400
Description: The numeric value describes the number of seconds (and fractions of seconds) since the initial time (January 1, 1970 00:00 UTC).

<sup>92</sup> In addition the Time class only *represents* time values. In order to change the behavior of time, the optional Tardis attachment (not detailed in this document) is required.

<sup>93</sup> Excluding Complex numeric values which generate an error.

<b>Source Type:</b> A String	
<b>Examples:</b>	<code>"Oct 26 1985 1:22" .to_t</code> <code>"Oct 26 1985 1:22 UTC" .to_t</code>
<b>Values:</b>	1985-10-26 01:22:00 -0400 1985-10-26 01:22:00 UTC
<b>Description:</b>	The string is converted to a time value using best-guess, sensible default assumptions. While it is possible to specify a time-zone, this can be very tricky in practice. If no time zone is specified, the machine local time zone is used. If UTC is specified, the Coordinated Universal Time <sup>94</sup> is used.
<b>Note:</b>	For more control over the conversion process from string to time, consider the parse methods below.

<b>Source Type:</b> An Array	
<b>Example:</b>	<code>[ 2015 6 14 18 50 0.0 -14400 ] .to_t</code> <code>[ 2015 6 14 18 ] .to_t</code>
<b>Value:</b>	2015-06-14 18:50:00 -0400 2015-06-14 00:00:00 -0400
<b>Description:</b>	The array contains values for the time components: year, month, day, hour, minutes, seconds, and offset from UTC. The array need not contain all of the values, missing data default to sensible values.

Note: It is also possible to convert a time value into a time value. This performs no action.

## ***Special Time Values***

<b>[] local_offset [an_integer]</b>	
Routing: VM	
This method returns the offset in seconds between local time and UTC. This value is not actually a constant as it is subject to change with factors such as daylight savings time and other manipulations of local time.	
<b>Code</b>	<b>Result</b>
<code>local_offset</code>	-14400

<sup>94</sup> UTC does indeed stand for Coordinated Universal Time. I hear that a committee was involved.



## `[] now [a_time]`

Routing: VM

This method returns the current local time of the host computer system.

Code	Result
<code>now</code>	2015-06-17 11:51:30 -0400

## Time Formatting

The standard<sup>95</sup> for formatting time values to strings is largely based on the `strftime()` function defined in ISO C<sup>96</sup> and POSIX<sup>97</sup>. Note that the same formatting codes are used by `fOOrth` for controlling the conversion of time objects into strings in the `format` and `f"` methods and the parsing of strings into time objects with the `parse`, `parse!`, `p"`, and `p!"` methods.

These format codes, grouped in related categories are listed below:

Date formats (Year, Month, Day):	
Format	Description
<code>%Y</code>	Year with century if provided, will pad result at least 4 digits.
<code>%C</code>	The century (Year/100)
<code>%m</code>	Month of the year, zero-padded (01..12)
<code>%_m</code>	Month of the year, blank-padded ( 1..12)
<code>%-m</code>	Month of the year, with no-padding (1..12)
<code>%B</code>	The full month name ("January")
<code>%^B</code>	The full month name in upper-case ("JANUARY")
<code>%b</code>	The abbreviated month name ("Jan")
<code>%^b</code>	The abbreviated month name in upper-case ("JAN")
<code>%h</code>	Equivalent to <code>%b</code>
<code>%d</code>	Day of the month, zero-padded (01..31)
<code>%-d</code>	Day of the month, with no padding (1..31)
<code>%e</code>	Day of the month, blank-padded ( 1..31)
<code>%j</code>	Day of the year (001..366)

<sup>95</sup> This material is largely taken from <http://ruby-doc.org/core-2.2.0/Time.html#method-i-strftime>

<sup>96</sup> Please see: [https://en.wikipedia.org/wiki/ANSI\\_C](https://en.wikipedia.org/wiki/ANSI_C)

<sup>97</sup> Please see: <https://en.wikipedia.org/wiki/POSIX>

<b>Time formats (Hour, Minute, Second, Subsecond):</b>	
<b>Format</b>	<b>Description</b>
%H	Hour of the day, 24-hour clock, zero-padded (00..23)
%k	Hour of the day, 24-hour clock, blank-padded ( 0..23)
%I	Hour of the day, 12-hour clock, zero-padded (01..12)
%I <sup>98</sup>	Hour of the day, 12-hour clock, blank-padded ( 1..12)
%P	Meridian indicator, lowercase ("am" or "pm")
%p	Meridian indicator, uppercase ("AM" or "PM")
%M	Minute of the hour (00..59)
%S	Second of the minute (00..60)
%L	Millisecond of the second (000..999)
%N	Fractional seconds digits, default is 9 digits (nanosecond)
%3N	Fractional seconds digits, 3 digits (millisecond)
%6N	Fractional seconds digits, 6 digits (microsecond)
%9N	Fractional seconds digits, 9 digits (nanosecond)

<b>Time zone formats:</b>	
<b>Format</b>	<b>Description</b>
%z	Time zone as hour and minute offset from UTC (e.g. +0900)
%:z	Time zone as hour and minute offset from UTC with a colon (e.g. +09:00)
%::z	Time zone as hour, minute and second offset from UTC with a colon (e.g. +09:00:00)
%Z	Abbreviated time zone name or similar information. (OS dependent)

<b>Weekday formats:</b>	
<b>Format</b>	<b>Description</b>
%A	The full weekday name ("Sunday")
%^A	The full weekday name in upper-case ("Sunday")
%a	The abbreviated name ("Sun")
%^a	The abbreviated name in upper-case ("Sun")
%u	Day of the week (Monday is 1, 1..7)
%w	Day of the week (Sunday is 0, 0..6)

---

<sup>98</sup> This character is a lower case "l", and not an upper-case "I".

**ISO 8601 week-based year and week number formats:**

Note: The first week of YYYY starts with a Monday and includes YYYY-01-04. The days in the year before the first week are in the last week of the previous year.

Format	Description
%G	The week-based year
%g	The last 2 digits of the week-based year (00..99)
%V	Week number of the week-based year (01..53)

**Week number formats:**

Note: The first week of YYYY that starts with a Sunday or Monday (according to %U or %W). The days in the year before the first week are in week 0.

Format	Description
%U	Week number of the year. The week starts with Sunday. (00..53)
%W	Week number of the year. The week starts with Monday. (00..53)

**Seconds since the Epoch formats:**

Format	Description
%s	Number of seconds since 1970-01-01 00:00:00 UTC.

**Literal strings:**

Format	Description
%n	A newline character (\n)
%t	A tab character (\t)
%%	A literal "%" character

Combination formats:	
Format	Description
%c	Date and time (%a %b %e %T %Y)
%D	Date (%m/%d/%y)
%F	The ISO 8601 date format (%Y-%m-%d)
%v	VAX <sup>99</sup> VMS date (%e-%^b-%4Y)
%x	Same as %D
%X	Same as %T
%r	12-hour time (%l:%M:%S %p)
%R	24-hour time (%H:%M)
%T	24-hour time (%H:%M:%S)

## Class Methods

<p><b>[a_string Time] p!" ... " [a_time]</b></p> <p>Routing: NOS</p> <p>This is the form of the parse method with an embedded format string. For details on the parse string, see the section Time Formatting above.</p> <p>If the source string cannot be parsed into a time, an error occurs. Contrast this with the p" method.</p>	
Code	Result
"Sunday June 14 at 06:50 PM" Time p"%A %B %d at %I:%M %p"	2015-06-14 18:50:00 -0400
"Someday June 14 at 06:50 PM" Time p"%A %B %d at %I:%M %p!"	F40: Cannot parse "Someday June 14 at 06:50 PM" into a Time instance

---

<sup>99</sup> Oh such memories of the beloved (but *really* slow) VAX 11/780 of my college days.

### **[a\_string Time] p" ... " [a\_time]**

Routing: NOS

This is the form of the parse method with an embedded format string. For details on the parse string, see the section Time Formatting above.

If the source string cannot be parsed into a time, the value nil is returned. Contrast this with the p!" method.

<b>Code</b>	<b>Result</b>
"Sunday June 14 at 06:50 PM" Time p"%A %B %d at %I:%M %p"	2015-06-14 18:50:00 -0400
"Someday June 14 at 06:50 PM" Time p"%A %B %d at %I:%M %p"	nil

### **[a\_string Time format\_string] parse [a\_time]**

Routing: NOS

This is the form of the parse method with a format string. For details on the parse string, see the section Time Formatting above.

If the source string cannot be parsed into a time, the value nil is returned. Contrast this with the parse! method.

<b>Code</b>	<b>Result</b>
"Sunday June 14 at 06:50 PM" Time "%A %B %d at %I:%M %p" parse	2015-06-14 18:50:00 -0400
"Someday June 14 at 06:50 PM" Time "%A %B %d at %I:%M %p" parse	nil

### **a\_string Time format\_string] parse! [a\_time]**

Routing: NOS

This is the form of the parse method with a format string. For details on the parse string, see the section Time Formatting above.

If the source string cannot be parsed into a time, an error occurs. Contrast this with the parse method.

<b>Code</b>	<b>Result</b>
"Sunday June 14 at 06:50 PM" Time "%A %B %d at %I:%M %p" parse!	2015-06-14 18:50:00 -0400
"Someday June 14 at 06:50 PM" Time "%A %B %d at %I:%M %p" parse!	F40: Cannot parse "Someday June 14 at 06:50 PM" into a Time instance

## Instance Methods

### **[time numeric] + [time]**

Routing: NOS

Add the number of seconds in the numeric to the time to create a new time object in the future (or in the past if a negative number is added).

Note: The original time object is not mutated by this method.

Code	Result
<code>now 10 +</code>	2015-06-17 12:58:18 -0400 (A time 10 seconds in the future)

### **[time time or a\_number] – [a\_duration or a\_time]**

Routing: NOS

The time subtraction method has two distinct behaviors:

- In the first form, one time is subtracted from another, the result is a Duration with a span equal to the number of seconds between the two time values. The span is negative if the first time value is less than the second time value.
- In the second form, a number of seconds is subtracted from a time and the result is a new time in the past (or in the future if a negative number is subtracted.).

Note: The original time object is not mutated by this method.

Code	Result
<code>"1955-11-5 13:00" .to_t "Oct 26 1985 1:22" .to_t -</code>	Duration instance <-945865320.0 seconds> <sup>100</sup> .
<code>now 10 -</code>	2015-06-17 13:30:21 -0400 (A time 10 seconds ago)

---

<sup>100</sup>The approximate amount of time, in seconds, that Marty McFly travels on his first time travel voyage.

### [time] .as\_local [time]

Routing: TOS

Convert the given time to the same time in the local time zone. If the given time is already in the local time zone, then no change is made.

Note: The original time object is not mutated by this method.

Code	Result
"12:00 UTC" .to_t .as_local	2015-06-17 08:00:00 -0400

### [time] .as\_utc [time]

Routing: TOS

Convert the given time to the same time zone as UTC. If the given time is already UTC, then no change is made.

Note: The original time object is not mutated by this method.

Code	Result
"8:00" .to_t .as_utc	2015-06-17 12:00:00 +0000

### [new\_offset time] .as\_zone [time]

Routing: TOS

Convert the given to to the time zone with the specified offset from UTC. If the given time already has that offset, no change is made.

Note:

- If the new offset used is local\_offset, then this is the same as .as\_local
- If the new offset used is 0, the this is the same as .as\_utc.
- The original time object is not mutated by this method.

Code	Result
3600 "12:00" .to_t .as_zone	2015-06-17 17:00:00 +0100
0 "8:00" .to_t .as_zone	2015-06-17 12:00:00 +0000
local_offset "12:00 UTC" .to_t .as_zone	2015-06-17 08:00:00 -0400

**[time] .day [day\_of\_month]**

Routing: TOS

Extract the day of the month (1..31) from the time object.

Code	Result
<code>now .day</code>	17

**[time] .fraction [float]**

Routing: TOS

Extract the fractions of a second (0.0..0.9999...) from the time object.

Code	Result
<code>now .fraction</code>	0.725853

**[time] .hour [integer]**

Routing: TOS

Extract the hour (0..23) from the time object.

Code	Result
<code>now .hour</code>	14

**[time] .minute [integer]**

Routing: TOS

Extract the minute (0..59) from the time object.

Code	Result
<code>now .minute</code>	39



**[time] .month [integer]**

Routing: TOS

Extract the month (1..12) from the time object

Code	Result
<code>now .month</code>	6

**[time] .offset [integer]**

Routing: TOS

Extract from the time object, the offset in seconds from UTC.

Code	Result
<code>now .offset</code>	-14400

**[time] .sec\_frac [integer]**

Routing: TOS

Extract the fractional seconds (0.0..59.9999...) from the time object.

Code	Result
<code>now .sec_frac</code>	32.578591

**[time] .second [integer]**

Routing:

Extract the whole seconds (0..59) from the time object.

Code	Result
<code>now .second</code>	24

**[time] .time\_s [string]**

Routing: TOS

Convert the time to a reasonable string representation. For more control over the conversion process, consider the `format` and `f` methods instead.

Code	Result
<code>now .time_s</code>	Wed Jun 17 14:49:27 2015

**[time] .to\_a [array]**

Routing: TOS

Break out all of the time information into an array of 7 elements. These elements, by position in the array, are:

```
[ Year Month Day Hour Minute Seconds Offset ]
```

These values are all integers except the Seconds which is a float value including any fractions of seconds.

Note: The array created by the `.to_a` method is compatible with the array required by the `to_t` and `to_t!` methods.

Code	Result
<code>now .to_a</code>	[ 2015 6 17 14 51 9.094222 -14400 ]

## [array/numeric/string/time] .to\_t [time]

Routing: TOS

Convert the argument into a time object. This method is actually a composite of three helper methods and a time method.

See Creating Time Values above for more details.

If it is not possible to convert the argument into a time object, nil is returned. Contrast with the to\_t! method.

Code	Result
[ 2015 6 17 14 51 9.09422 -14400 ] .to_t	2015-06-17 14:51:09 -0400
1434322201 .to_t	2015-06-14 18:50:01 -0400
"1955-11-5 13:00" .to_t	1955-11-05 13:00:00 -0400
now .to_t	2015-06-17 15:18:33 -0400
[ 2015 13 7 14 51 9.094222 -14400 ] .to_t	nil
infinity .to_t	nil
1+3i .to_t	F20: A Complex instance does not understand .to_t (:_218).
"apple" .to_t	nil

## **[array/numeric/string/time] .to\_t! [time]**

Routing: TOS

Convert the argument into a time object. This method is actually a composite of three helper methods and a time method.

See [Creating Time Values](#) above for more details.

If it is not possible to convert the argument into a time object, an error occurs. Contrast with the `to_t` method.

<b>Code</b>	<b>Result</b>
<code>[ 2015 6 17 14 51 9.09422 -14400 ] .to_t!</code>	2015-06-17 14:51:09 -0400
<code>1434322201 .to_t!</code>	2015-06-14 18:50:01 -0400
<code>"1955-11-5 13:00" .to_t!</code>	1955-11-05 13:00:00 -0400
<code>now .to_t!</code>	2015-06-17 15:18:33 -0400
<code>[ 2015 13 7 14 51 9.09422 -14400 ] .to_t!</code>	F40: Cannot convert [2015, 13, 7, 14, 51, 9.09422, -14400] to a Time instance
<code>infinity .to_t!</code>	F40: Cannot convert Infinity to a Time instance
<code>1+3i .to_t!</code>	F20: A Complex instance does not understand .to_t (:_218).
<code>"apple" .to_t!</code>	F40: Cannot convert "apple" to a Time instance

## **[time] .utc? [a\_boolean]**

Routing: TOS

This method returns true if the argument is in the same time zone as UTC.

<b>Code</b>	<b>Result</b>
<code>now .utc?</code>	false
<code>"11:45 UTC" to_t .utc?</code>	true

## **[time] .year [integer]**

Routing: TOS

Extract the year from the time object.

<b>Code</b>	<b>Result</b>
<code>now .year</code>	2015

**[time time] < [a\_boolean]**

Routing: NOS

Is the first time less than the second one?

Code	Result
1434322200 .to_t 1434322201 .to_t <	true
1434322201 .to_t 1434322201 .to_t <	false
1434322201 .to_t 1434322200 .to_t <	false

**[time time] <= [a\_boolean]**

Routing: NOS

Is the first time less than or equal to the second one?

Code	Result
1434322200 .to_t 1434322201 .to_t <=	true
1434322201 .to_t 1434322201 .to_t <=	true
1434322201 .to_t 1434322200 .to_t <=	false

**[time time] <=> [1, 0, -1]**

Routing: NOS

Perform a “three outcome” comparison of two time values.

Code	Result
1434322200 .to_t 1434322201 .to_t <=>	-1
1434322201 .to_t 1434322201 .to_t <=>	0
1434322201 .to_t 1434322200 .to_t <=>	1

**[time time] > [a\_boolean]**

Routing: NOS

Is the first time greater than the second one?

Code	Result
1434322200 .to_t 1434322201 .to_t >	false
1434322201 .to_t 1434322201 .to_t >	false
1434322201 .to_t 1434322200 .to_t >	true

**[before] >= [after]**

Routing: NOS

Is the first time greater than or equal to the second one?

Code	Result
1434322200 .to_t 1434322201 .to_t >=	false
1434322201 .to_t 1434322201 .to_t >=	true
1434322201 .to_t 1434322200 .to_t >=	true

**[time] f" ... " [a\_string]**

Routing: NOS

Format the time value using the embedded format string as a template. See the section Time Formatting for more details on the available options.

Code	Result
1434322201 .to_t f"%A %B %d at %I:%M %p"	"Sunday June 14 at 06:50 PM"
1434322201 .to_t f"%A %B %d, %r"	"Sunday June 14, 06:50:01 PM"
1434322201 .to_t f"%A %B %d, %T"	"Sunday June 14, 18:50:01"

## **[time fmt\_string] format [a\_string]**

Routing: NOS

Format the time value using the format string argument as a template. See the section Time Formatting for more details on the available options.

<b>Code</b>	<b>Result</b>
1434322201 .to_t "%A %B %d at %I:%M %p" format	"Sunday June 14 at 06:50 PM"
1434322201 .to_t "%A %B %d, %r" format	"Sunday June 14, 06:50:01 PM"
1434322201 .to_t "%A %B %d, %T" format	"Sunday June 14, 18:50:01"

## ***Class Stubs***

The following method is stubbed out in the Time class and not available: .new





## TrueClass

Inheritance: TrueClass ← Object

```
No unique methods defined.
```

```
Helper Methods =  
true
```

The TrueClass is used to implement the true constant value. In spite of this, the functionality of true values is actually contained in the Object class.

### ***TrueClass Literals***

Instances of the TrueClass are made available by the Virtual Machine helper method “true”.



## VirtualMachine

Inheritance: VirtualMachine ← Object

```
VirtualMachine Shared Methods =
!:)show      .to_s      clear      max_float  switch
")start     .vm_name    clone      min_float  throw"
)threads   2drop      complex    nan        true
)classes   )time      2dup      copy      nil        try
)context   )unmap"    :         cr         nip        tuck
)context!  )version   ?dup      do         now        val#:
)debug     )vm        [         dpr        over       val$:
)elapsed   )vm!      a_day     drop       pause      var#:
)entries   )words     a_minute  dup        pi         var$:
)globals   -infinity  a_month   e          pick       vm
)irb       .:         a_second  epsilon    rational   {
)load"     .::       a_year    false     rational!  {{
)map"      .dump     accept    gather     rot
)nodebug   .elapsed  accept"   if         self
)noshow    .restart  an_hour   infinity   space
)quit      .start    begin     load"      spaces
)restart   .subclass: class:    local_offset swap
```

The Virtual Machine is the center of activity of the fOOrth language system. It contains the stack, compiler, symbol mapping facility, context tracking and many other essential services utilized by the the entire class hierarchy. The same is also somewhat true of the Object class. The distinction between these is a matter of scope. The Object class is system wide. The virtual machine exists as a distinct instance per thread. Thus the virtual machine is better suited to managing the large scope of activities that are on a per-thread basis.

Since every thread must have exactly one virtual machine, it also serves as a universal routing target. Thus the virtual machine is used heavily by the compiler in the implementation of control and data literal structures.

The virtual machine is also the target for almost all user command level methods for the same reason.

## Instance Methods

**[] !: method\_name ... ; []**

Routing: VM

This method is used to define a method on the virtual machine. These methods execute immediately even when in deferred or compile modes.

Notes

- There are pretty much no restrictions on the name except that it not contain spaces and any " signals an embedded string (which is also immediate).

Code	Result
!: one 1 ;	(Creates an immediate VM method one)

### **Local Methods:**

**[undefined] super [undefined]**

Routing: Compiler Context.

Invoke the definition of this method in the nearest parent class of this class that defines a method of the same name. The arguments to the super method must match those of the parent class's implementation of this method. The return values will also be those of the parent class. If no parent class defines a method of the same name as this one, an error is generated.

Note: This method is rarely useful in Virtual Machine methods because so few of them override a parent method.

**[value] val: local\_name []**

Routing: Compiler Context.

This method defines a local value in the current method.

See Data Storage in fOOrth, above, for more details on values and variables.

Code	Result
10 val: limit	(Creates a value named limit set to 10)

***[value] var: local\_name []***

Routing: Compiler Context.

This method defines a local variable in the current method.

See Data Storage in fOOrth, above, for more details on values and variables.

Code	Result
10 var: limit	(Creates a variable named limit set to 10)

***[value] val@: @instance\_name []***

Routing: Compiler Context.

This method creates an instance value in the instance of the host class.

See Data Storage in fOOrth, above, for more details on values and variables.

Code	Result
10 val@: @limit	(Creates an instance value named @limit set to 10)

***[value] var@: @instance\_name []***

Routing: Compiler Context.

This method creates an instance value in the instance of the host class.

See Data Storage in fOOrth, above, for more details on values and variables.

Code	Result
10 var@: @limit	(Creates an instance variable named @limit initially set to 10)

***[] ... ; []***

Routing: Compiler Context.

Close off the method definition.

***[] " ... " [a\_string]***

Routing: VM

This is the string literal support method of the Virtual Machine. Please see class String Literals for more information.

## **[] -infinity [-Infinity]**

Routing: VM

Please see Numeric – Special Numeric Values, above, for more information.

## **[a\_class] .: method\_name ... ; []**

Routing: VM

This method is used to define new methods on the specified class. Please see the Class class for more details.

## **[an\_object] .:: []**

Routing: VM.

Start defining an exclusive (singleton in Ruby parlance) method on the receiver object. Please see the Object class for more details.

## **[a\_virtual\_machine] .dump []**

Routing: TOS

This debug method displays a “dump” of crucial data in the given virtual machine. See Tracking the Virtual Machine above for mere details.

<b>Code</b>	<b>Result</b>
vm .dump	(Displays a dump of the virtual machine)

## **[a\_virtual\_machine] .elapsed [a\_float]**

Routing: TOS

This method returns the number of seconds since the virtual machine was started or restarted.

<b>Code</b>	<b>Result</b>
vm .elapsed	68.952106 (Example only)

**[a\_class] .subclass: class\_name []**

Routing: VM

This method is used to create new classes. See the Class class for more details.

**[a\_virtual\_machine] .restart []**

Routing: TOS

Reset the start time of the virtual machine to now.

Code	Result
vm .restart	

**[a\_virtual\_machine] .to\_s [a\_string]**

Routing: TOS

Convert the virtual machine to a string. This method overrides the default implementation in the Object class.

Code	Result
vm .to_s	"VirtualMachine instance <Main>"

**[a\_virtual\_machine] .start [a\_date\_time]**

Routing: TOS

Get the start time of the virtual machine.

Code	Result
vm .start	a_time_object

**[before] .vm\_name [after]**

Routing: VM

Return the name of the virtual machine as a string.

Code	Result
vm .vm_name	"Main"

## **[obj\_a obj\_b] 2drop []**

Routing: VM

This method drops the top 2 elements from the data stack.

<b>Code</b>	<b>Result</b>
1 2 3 4 2drop	1 2

## **[obj\_a obj\_b] 2dup [obj\_a obj\_b obj\_a obj\_b]**

Routing: VM

This method duplicates the top 2 elements on the stack.

<b>Code</b>	<b>Result</b>
1 2 3 4 2dup	1 2 3 4 3 4

## **[] : method\_name ... ; []**

Routing: VM

This method is used to define a method on the virtual machine. These methods execute normally with to the current mode.

Notes

- There are pretty much no restrictions on the name except that it not contain spaces and any " signals an embedded string.
- This type of fOOrth method most closely resembles a classical FORTH word.

<b>Code</b>	<b>Result</b>
: double dup + ;	(Create the double method)

### ***Local Methods:***

#### ***[undefined] super [undefined]***

Routing: Compiler Context.

Invoke the definition of this method in the nearest parent class of this class that defines a method of the same name. The arguments to the super method must match those of the parent class's implementation of this method. The return values will also be those of the parent class. If no parent class defines a method of the same name as this one, an error is generated.

Note: This method is rarely useful in Virtual Machine methods because so few of them override a parent method.



***[value] val: local\_name []***

Routing: Compiler Context.

This method defines a local value in the current method.

See Data Storage in fOOrth, above, for more details on values and variables.

Code	Result
10 val: limit	(Creates a value named limit set to 10)

***[value] var: local\_name []***

Routing: Compiler Context.

This method defines a local variable in the current method.

See Data Storage in fOOrth, above, for more details on values and variables.

Code	Result
10 var: limit	(Creates a variable named limit set to 10)

***[value] val@: @instance\_name []***

Routing: Compiler Context.

This method creates an instance value in the instance of the host class.

See Data Storage in fOOrth, above, for more details on values and variables.

Code	Result
10 val@: @limit	(Creates an instance value named @limit set to 10)

***[value] var@: @instance\_name []***

Routing: Compiler Context.

This method creates an instance value in the instance of the host class.

See Data Storage in fOOrth, above, for more details on values and variables.

Code	Result
10 var@: @limit	(Creates an instance variable named @limit initially set to 10)

***[] ... ; []***

Routing: Compiler Context.

Close off the method definition.

**[an\_object] ?dup [an\_object an\_object] or [false/nil]**

Routing: VM

Duplicate the top element of the stack unless it is false or nil.

Code	Result
43 ?dup	43 43
true ?dup	true true
false ?dup	false false
nil ?dup	nil nil

**[] [ ... ] [an\_array]**

Routing: VM

This method is used to create array literal. See Array Literals above for more details.

**[] a\_day [a\_duration]**

Routing: VM

A helper method for Duration. See Special Duration Values for more information.

**[] a\_minute [a\_duration]**

Routing: VM

A helper method for Duration. See Special Duration Values for more information.

**[] a\_month [a\_duration]**

Routing: VM

A helper method for Duration. See Special Duration Values for more information.

### **[] a\_second [a\_duration]**

Routing: VM

A helper method for Duration. See Special Duration Values for more information.

### **[] a\_year [a\_duration]**

Routing: VM

A helper method for Duration. See Special Duration Values for more information.

### **[] accept [a\_string]**

Routing: VM

With a prompt of '? ', get a line of text from the console.

<b>Code</b>	<b>Result</b>
<code>accept</code>	<code>a_string</code>

### **[] accept" ... " [a\_string]**

Routing: VM

Using the embedded string as a prompt, get a line of text from the console

<b>Code</b>	<b>Result</b>
<code>accept"Enter cost"</code>	<code>a_string</code>

### **[] an\_hour [a\_duration]**

Routing: VM

A helper method for Duration. See Special Duration Values for more information.

## **[] begin ... until/again/repeat []**

Routing: VM

These methods are used to support arbitrary loops in fOOrth. There are three types of methods involved: begin, optional while expression, and ending.

The begin method, marks the start of the loop.

The optional while method bails out of the loop if its argument is false. Zero or more while methods may be present in one loop.

Finally the ending methods until, again, or repeat, mark the end of the loop. The until method will exit the loop if given a true parameter. The again and repeat methods rely on a while method to terminate the loop.

This statement may be structured in many ways, here are a few examples:

```
(loop ends when condition is true)
begin (body) (condition) until

(loop end when condition is false)
begin (body) (condition) while (body) again

(loop end when condition1 or condition2 are false)
begin (body) (condition1) while (body) (condition2) while (body) again

(loop end when condition1 is false or condition2 is true)
begin (body) (condition1) while (body) (condition2) until
```

Where (body) represents the loop body code, and (condition) is a loop test or exit criteria. See the begin statement above for more details.

### ***Local Methods:***

#### ***[a\_boolean] while []***

Routing: Compiler Context.

This method exits the loop if the boolean is false.

#### ***[a\_boolean] ... until []***

Routing: Compiler Context.

This method marks the end of the loop. Further, it ends the loop if the boolean is true.

#### ***[] ... again []***

Routing: Compiler Context.

This method marks the end of the loop. This method is interchangeable with repeat.

**[] ... repeat []**

Routing: Compiler Context.

This method marks the end of the loop. This method is interchangeable with again.

**[] class: class\_name []**

Routing: VM

This method is used to create new classes. See the Class class for more details.

**[an\_object] clone [an\_object an\_object]**

Routing: VM

Take the top element of the stack and create a clone (deep copy) of it. The original object becomes the second element on the stack.

Code	Result
"apple" clone	"apple" "apple"
"apple" clone distinct?	true

**[real\_part imaginary\_part] complex [a\_complex]**

Routing: VM

Given two numbers, create a complex number. See the Complex class for more details.

**[an\_object] copy [an\_object an\_object]**

Routing: VM

Take the top element of the stack and create a (shallow) copy of it. The original object becomes the second element on the stack.

Code	Result
"apple" clone	"apple" "apple"
"apple" clone distinct?	true

## **[] cr []**

Routing: VM

Send a new line character to the console.

<b>Code</b>	<b>Result</b>
<code>cr</code>	(A new line is sent to the console.)

## **[start\_value end\_stop] do ... loop/+loop []**

Routing: VM

The do loop is used to facilitate counted iteration in fOOrth. In general, looping proceeds from the start\_value up to the end\_stop-1. Access to the iteration value is provided by the “i” method while “-i” supplies the reverse iteration value. The related “j” and “-j” methods allow access to an “outer” loop iteration value. Finally the “loop” method closes off the loop body and adds one to the iteration value, while “+loop” allows the iteration step to be specified.

Note: In order to work correctly the “-i”/“-j” methods require the end\_stop to be one more than the last value iterated.

See the do statement above for more information.

<b>Code</b>	<b>Result</b>
<code>0 10 do i . space loop</code>	(Prints 0 1 2 3 4 5 6 7 8 9)
<code>0 10 do -i . space loop</code>	(Prints 9 8 7 6 5 4 3 2 1 0)
<code>0 9 do i . space 2 +loop</code>	(Prints 0 2 4 6 8)
<code>0 9 do -i . space 2 +loop</code>	(Prints 8 6 4 2 0)
<code>0 10 do -i . space 2 +loop</code>	(Prints 9 7 5 3 1)

### ***Local Methods:***

#### ***[] i [iteration\_value]***

Routing: Compiler Context.

Get the iteration value of the do loop. See above.

### **[] j [iteration\_value]**

Routing: Compiler Context.

Get the iteration value of an outer loop. This is to support nested loops. If there is no outer loop, the value zero is returned.

Code	Result
<pre>0 2 do   0 2 do i . .", " j . space loop loop</pre>	(Prints 0,0 1,0 0,1 1,1)
<pre>0 2 do j . space loop</pre>	(Prints 0 0)

### **[] -i [iteration\_value]**

Routing: Compiler Context.

Get the reverse iteration value. Specifically, this is computed as:

```
(start_value + end_stop - 1) - i.
```

Code	Result
<pre>10 20 do -i . space loop</pre>	(Prints 19 18 17 16 15 14 13 12 11 10)

### **[] -j [iteration\_value]**

Routing: Compiler Context.

Get the reverse iteration value of an outer loop. This supports reverse outer nested loops. If there is no outer loop, the value zero is returned.

Code	Result
<pre>0 2 do   0 2 do -i . .", " -j . space loop loop</pre>	(Prints 1,1 0,1 1,0 0,0)
<pre>0 2 do j . space loop</pre>	(Prints 0 0)

### **[] ... loop []**

Routing: Compiler Context.

This method marks the end of the loop.

### ***[step\_value] ... +loop []***

Routing: Compiler Context.

This method increments the loop index by the specified value and marks the end of the loop. If the step value is not a number or is less than or equal to zero, an error occurs.

<b>Code</b>	<b>Result</b>
0 10 do i . space 2 +loop	(Displays "0 2 4 6 8")
0 10 do i . space "apple" +loop	F40: Cannot convert a String instance to a Numeric instance
0 10 do i . space 0 +loop	F41: Invalid loop increment value: 0

### **[] dpr [a\_float]**

Routing: VM

A helper method for Numeric. See Special Numeric Values for more information.

### **[an\_object] drop []**

Routing: VM

Drop the top-of-stack element. If there is no such element, an error occurs.

<b>Code</b>	<b>Result</b>
1 2 3 drop	1 2
drop	F30: Data Stack Underflow: pop

### **[an\_object] dup [an\_object an\_object]**

Routing: VM

Duplicate the top-of-stack element. This only duplicates references, not the data itself

<b>Code</b>	<b>Result</b>
4 dup	4 4
"apple" dup	"apple" "apple"
"apple" dup identical?	true
"apple" dup distinct?	false



**[] e [a\_float]**

Routing: VM

A helper method for Numeric. See Special Numeric Values for more information.

**[] epsilon [a\_float]**

Routing: VM

A helper method for Numeric. See Special Numeric Values for more information.

**[] false [false]**

Routing: VM

A helper method for FalseClass. See FalseClass literals for more information.

**[d<sub>0</sub> .. d<sub>N</sub>] gather [[d<sub>0</sub> .. d<sub>N</sub>]]**

Routing: VM

A helper method for Array. See Array for more details.

**[a\_boolean] if ... then [unspecified]**

Routing: VM

The “if” method implements the classic if statement in fOOrth. The if statement is used for cases where one or two branches are required. Where an arbitrary number of code branches, please see the switch statement below. The generalized layout of the if statement is:

```
(a condition) if (true clause) else (false clause) then
```

Where the else clause is optional, and only one of them is allowed. See the if statement above for more details.

Code	Result
2 odd? if ."ODD" else ."EVEN" then	(Prints EVEN)
3 odd? if ."ODD" else ."EVEN" then	(Prints ODD)
true if space else cr else ."?" then	F11: ?else?

**Local Methods:**

**[] ... else ... []**

Routing: Compiler Context.

This marks the beginning of the optional else clause.

**[] ... then []**

Routing: Compiler Context.

This marks the end of the if statement.

**[] infinity [a\_float]**

Routing: VM

A helper method for Numeric. See Special Numeric Values for more information.

**[] load"file\_name" [unspecified]**

Routing: VM

This methods loads a fOorth source file, executing the code contained therein. If no file type is given, a type of ".forth" is used as a default.

Note: This method is similar to the )load" command except that it does not provide feedback to the console.

Code	Result
load"my_file.forth"	(Loads my_file.forth)
load"my_file"	(Loads my_file.forth)
load"my_file."	(Loads my_file.)

**[] max\_float [a\_float]**

Routing: VM

A helper method for Numeric. See Special Numeric Values for more information.

### **[] min\_float [a\_float]**

Routing: VM

A helper method for Numeric. See Special Numeric Values for more information.

### **[] nan [a\_float]**

Routing: VM

A helper method for Numeric. See Special Numeric Values for more information.

### **[before] nil [nil]**

Routing: VM

A helper method for NilClass. See NilClass Literals for more information.

### **[object\_a object\_b] nip [object\_b]**

Routing: VM

Drop the next-of-stack element. The top-of-stack element is not affected.

<b>Code</b>	<b>Result</b>
1 2 3 nip	1 3

### **[object\_a object\_b] over [object\_a object\_b object\_a]**

Routing: VM

Push the next-of-stack element onto the stack. This becomes the new top-of-stack element.

<b>Code</b>	<b>Result</b>
1 2 3 over	1 2 3 2

### **[] pause []**

Routing: VM

Pause the current thread. See the Thread class above for more details.

**[] pi [a\_float]**

Routing: VM

A helper method for Numeric. See Special Numeric Values for more information.

**[index] pick [an\_object]**

Routing: VM

This method picks off the item on the stack selected by the index, where 1 represents the top-of-stack, 2 the next-of-stack, etc. Attempting to read elements deeper than the total stack or “before” the top-of-stack generate an error.

Code	Result
1 2 3 1 pick	1, 2, 3, 3
1 2 3 3 pick	1, 2, 3, 1
1 2 3 "apple" pick	F40: Cannot coerce a String instance to an Integer instance
1 2 3 0 pick	F30: Data Stack Underflow: peek

**[numerator denominator] rational [a\_rational]**

Routing: VM

Convert a numerator and denominator into a rational number. See the Rational class for more details.

**[numerator denominator] rational! [a\_rational]**

Routing: VM

Convert a numerator and denominator into a rational number. See the Rational class for more details.

### [object\_a object\_b object\_c] rot [object\_b object\_c object\_a]

Routing: VM

This method “rotates” the top three elements on the stack.

Code	Result
1 2 3 rot	2 3 1

### [] self [a\_object]

Routing: VM

This method pushes the current “owner” object onto the stack.

See the section Self, above, for more details.

Code	Result
> <u>self</u>	VirtualMachine instance <Main>
4 .with{ self }	4
class: MyClass MyClass .: .who_r_u self ; MyClass .new .who_r_u .name	“MyClass instance”

### [] space []

Routing: VM

Prints a space character on the console.

Code	Result
space	(Prints a space)

### [count] spaces []

Routing: VM

Prints count spaces on the console.

Code	Result
1 . 5 spaces 1 .	(Prints 1 1)

## **[object\_a object\_b] swap [ object\_b object\_a]**

Routing: VM

This method exchanges (swaps) the top two elements of the stack.

<b>Code</b>	<b>Result</b>
1 2 swap	2 1

## **[unspecified] switch ... end [unspecified]**

Routing: VM

The switch statement is used to create a program decision point with an arbitrary number of code branches. Recall that the if statement is used for cases where one or two branches suffice.

In general, the switch statement is bound by the key words “switch” and “end”. In between, arbitrary code is permitted with two additional local methods: “break” and “?break”. When a break is executed, the program “jumps” to the end of the switch and exits. The ?break is the same except that this jump action is only taken if its argument is not false or nil.

The switch statement is laid out along the following lines:

```
switch
  condition1 if action1 break then
  condition2 if action2 break then
  condition3 ?break
  condition4 if action4 break then

  (etc)

  default_action_here
end
```

There are many possible ways to utilize the switch statement, the above is merely one example. See the switch statement above for more details.

### ***Local Methods:***

#### ***[] break []***

Routing: Compiler Context.

This method breaks out of the switch code block.

### ***[a\_boolean] ?break []***

Routing: Compiler Context.

This method breaks out of the switch code block if the argument is true, else it takes no action.

### ***[] ... end []***

Routing: Compiler Context.

This method marks the end of the switch block.

### **[] throw "Error Message" []**

Routing: VM

This method is used to send exception messages. These messages consist of strings with a formal error code followed by a free-form descriptive message.

See Handling Exceptions above for more details.

<b>Code</b>	<b>Result</b>
<code>throw "U01: Invalid User Id."</code>	(Throws the exception U01)

### **[] true [true]**

Routing: VM

A helper method for TrueClass. See TrueClass Literals for more information.

<b>Code</b>	<b>Result</b>
<code>true</code>	true

### **[unspecified] try ... end [unspecified]**

Routing: VM

The try block is used to control and contain exceptions. The try block is composed of three sections:

- The try section that contains the potentially error prone code.
- The optional catch section that responds to and processes exceptions.
- The optional finally section that performs clean-up actions regardless of whether any exceptional conditions were encountered.

A simple example try block is:

```
: ttry
  try swap dup . ." / " swap dup . ." = " / .
  catch
    switch
      ?"E15" if clear ."Error" break then
      bounce
    end
  finally
    cr ."Done!" cr
  end ;
```

```
>100 2 ttry
100 / 2 = 50
Done!
```

```
>10 0 ttry
10 / 0 = Error
Done!
```

See Handling Exceptions above for more details.

### **Local Methods:**

#### **[] catch []**

Routing: Compiler Context.

This method starts the exception handling portion of the try block.

#### **[] ?"error\_code" [a\_boolean]**

Routing: Compiler Context.

This method matches the error code of the current exception with the embedded string. The strings are compared only as far as the length of the embedded string. If the sub-strings match, true is returned, else false. This method is only permitted in the catch section.

<b>Code</b>	<b>Result</b>
? "E"	(Matches all errors codes starting with "E")
? "E05"	(Matches all "E05" codes, Index Error)
? "E05, 01"	(Matches all "E05,01" codes, Key Error)

#### **[] bounce []**

Routing: Compiler Context.

Relaunch the current error so that some higher level catch clause can deal with it. This method is only permitted in the catch section.



### **[] error [a\_string]**

Routing: Compiler Context.

Retrieve the full text of the current error message. This method is only permitted in the catch section.

### **[] finally []**

Routing: Compiler Context.

This method starts the cleanup section of the try block. The finally section is always executed regardless of caught or un-caught exceptions that may occur.

### **[before] ... end [after]**

Routing: Compiler Context.

The method closes off the try block.

### **[object\_a object\_b] tuck [object\_b object\_a object\_b]**

Routing: VM

This method tucks the top element of the stack under the second element.

Code	Result
1 2 tuck	2 1 2

### **[an\_object] val#: thread\_data\_name []**

Routing: VM

This method is used to define a thread local value. This value is available at all points in this thread. A copy of this value will be made in any threads created after this value is created. The name of the value created must conform to the following regex:

```
/^#[a-z][a-z0-9_]*$/
```

This means the the name must start with a “#” and a lower case letter followed by zero or more lower case letters or digits or underscores “\_”.

See Data Storage in fOOrth – Scoping, for more details on this topic.

Code	Result
42 val#: #answer	(Creates the thread value #answer)
42 val#: wrong	F10: Invalid val name wrong

## [an\_object] val\$: global\_data\_name []

Routing: VM

This method is used to define a global value. This value is available to all points in the fOOrth program. The name of the value created must conform to the following regex:

```
/^\$[a-z][a-z0-9_]*$/
```

This means the the name must start with a “\$” and a lower case letter followed by zero or more lower case letters or digits or underscores “\_”.

See Data Storage in fOOrth – Scoping, for more details on this topic.

Code	Result
42 val\$: \$answer	(Creates the global value \$answer)
42 val\$: wrong	F10: Invalid val name wrong

## [an\_object] var#: thread\_data\_name []

Routing: VM

This method is used to define a thread local variable. This variable is available at all points in this thread. A copy of this variable will be made in any threads created after this variable is created. The name of the variable created must conform to the following regex:

```
/^#[a-z][a-z0-9_]*$/
```

This means the the name must start with a “#” and a lower case letter followed by zero or more lower case letters or digits or underscores “\_”.

See Data Storage in fOOrth – Scoping, for more details on this topic.

Code	Result
42 var#: #answer	(Creates the thread variable #answer)
42 var#: wrong	F10: Invalid var name wrong

## **[an\_object] var\$: global\_data\_name []**

Routing: VM

This method is used to define a global variable. This variable is available to all points in the fOOrth program. The name of the variable created must conform to the following regex:

```
/^\$[a-z][a-z0-9_]*$/
```

This means the the name must start with a “\$” and a lower case letter followed by zero or more lower case letters or digits or underscores “\_”.

See Data Storage in fOOrth – Scoping, for more details on this topic.

<b>Code</b>	<b>Result</b>
42 var\$: \$answer	(Creates the global variable \$answer)
42 var\$: wrong	F10: Invalid var name wrong

## **[] vm [a\_virtual\_machine]**

Routing: VM

Get the current thread's virtual machine instance.

<b>Code</b>	<b>Result</b>
vm .name	“VirtualMachine instance <Main>”

## **[] { ... } [a\_hash]**

Routing: VM

This is a helper method for creating Hash objects. See Hash Literals above for more details.

## **[] {{ ... }} [a\_procedure]**

Routing: VM

This is a helper method for creating Procedure objects. See Procedure Literals above for more details.

## Commands

**[ ]" ... " [ ]**

Routing: VM

This command submits the embedded string as input to the console's command processor. Some examples of this command in action are:

```
>)"ls"  
Gemfile          demo.rb          fOOrth.reek    license.txt    rdoc          t.txt  
Gemfile.lock     docs             integration    pkg            reek.txt      test.forth  
README.md        fOOrth.gemspec  lib           rakefile.rb    sire.rb       tests  
  
>)"git status"  
On branch master  
Your branch is up-to-date with 'origin/master'.  
  
Changes not staged for commit:  
  (use "git add <file>..." to update what will be committed)  
  (use "git checkout -- <file>..." to discard changes in working directory)  
  
    modified:   docs/The_fOOrth_User_Guide.odt  
    modified:   lib/fOOrth/compiler.rb  
    modified:   lib/fOOrth/compiler/parser.rb  
  
no changes added to commit (use "git add" and/or "git commit -a")
```

**Note:** This command can be used to do very naughty things to the host computer.

**[ ] )classes [ ]**

Routing: VM

Generate a list of the classes in the system. For example:

```
>)classes  
Array          Fixnum          NilClass        Queue           TrueClass  
Bignum         Float           Numeric          Rational        VirtualMachine  
Class          Hash            Object           Stack  
Complex        InStream        OutStream        String  
FalseClass     Integer         Procedure        Thread
```

## **[] )context []**

Routing: VM

Display the compiler context at execution of the )context command. See the section Context for more details.

## **[] )context! []**

Routing: VM

Display the compiler context at compiling of the )context command. See the section Context for more details.

## **[] )debug []**

Routing: VM

This method activates debug mode in which greater detail of compiler activity is displayed. For example:

```
>debug
```

```
>2 3 + 4 *
```

```
Tags=[:numeric] Code="vm.push(2); "  
Tags=[:numeric] Code="vm.push(3); "  
Tags=[:stub] Code="vm.swap_pop._016(vm); "  
Tags=[:numeric] Code="vm.push(4); "  
Tags=[:stub] Code="vm.swap_pop._018(vm); "
```

```
>: double dup + ;
```

```
Tags=[:immediate] Code="vm._085(vm); "  
begin_compile_mode  
Tags=[:macro] Code="vm.push(vm.peak()); "  
Tags=[:stub] Code="vm.swap_pop._016(vm); "  
Tags=[:immediate] Code="vm.context[:_316].does.call(vm); "  
double => lambda {|vm| vm.push(vm.peak()); vm.swap_pop._016(vm); }  
end_compile_mode
```

```
>5 double .
```

```
Tags=[:numeric] Code="vm.push(5); "  
Tags=[] Code="vm._317(vm); "  
Tags=[] Code="vm.pop._094(vm); "  
10
```

This command is canceled by the )nodebug command.

## **[] )elapsed []**

Routing: VM

Display how much time has elapsed since the current virtual machine was started.

```
> )elapsed  
Elapsed time is 606.454005 seconds
```

## **[] )entries []**

Routing: VM

Display the currently defined entries of the symbol table. See Appendix A for an example.

## **[] )globals []**

Routing: VM

Display the currently defined global values and variables and the strings they map to.

```
> 42 val$: $zz  
  
> )globals  
$zz (_304)
```

## **[] )irb []**

Routing: VM

Launch into an interactive Ruby debug session:

```
> irb  
  
Starting an IRB console for f00rth.  
Enter quit to return to f00rth.  
  
irb(main):001:0>
```

This command is canceled by the IRB quit command.

## **[] )load" ... " []**

Routing: VM

Load the file named in the embedded string. This unlike load" this method provides user feedback of the loading process.

```
> )load"docs/snippets/ugly_if"  
Loading file: docs/snippets/ugly_if.forth  
Completed in 0.01 seconds
```

## **[] )map" ... " []**

Routing: VM

Display the mapping information (if any) for the embedded string. See the section Exploring the Mapping System above for more information.

## **[] )nodebug []**

Routing: VM

Disable the debug mode described above.

## **[] )noshow []**

Routing: VM

Disable the show mode described below.

## **[] )quit []**

Routing: VM

Exit the fOOrth language system:

```
> )quit  
  
Quit command received. Exiting fOOrth.  
  
C:\Sites\fOOrth>
```

## [] )restart []

Routing: VM

Reset the virtual machine start time to now.

## [] )show []

Routing: VM

When this command is active, the contents of the stack are displayed after each command is processed.

```
> )show
> 1 2 3
[ 1 2 3 ]
> +
[ 1 5 ]
> *
[ 5 ]
```

This command is canceled by the )noshow command.

## [] )start []

Routing: VM

Display the start time of the virtual machine.

```
> )start
Start time is 2015-05-10 17:26:25 -0400
```

## [] )threads []

Routing: VM

Display the currently executing threads in the fOOrth system.

```
> )threads
#<Thread:0x1aec3b0> vm = <Main>
```



## **[] )time []**

Routing: VM

Display the current time.

```
>)time  
It is now: 2015-05-10 at 05:35pm
```

## **[] )unmap" ... " []**

Routing: VM

Display the reverse mapping information (if any) for the embedded string. See the section Exploring the Mapping System above for more information.

## **[] )version []**

Routing: VM

Display the version string of the fOOrth language system.

```
>)version  
fOOrth language system version = 0.0.6
```

## **[] )vm []**

Routing: VM

Display a virtual machine dump at execution of the )vm command. See the section Context for more details.

## **[] )vm! []**

Routing: VM

Display a virtual machine dump at compilation of the )vm command. See the section Context for more details.

## [ ] )words [ ]

Routing: VM

Display the active methods defined for this virtual machine:

> )words

VirtualMachine Shared Methods =

```
!:(      )nodebug  -infinity  ?dup      drop      over      true
"        )noshow   .:         [         dup       pause     try
)"       )quit     .::        accept    e         pi        tuck
)classes )restart  .dump      accept"   epsilon  pick      val#:
)context )show    .elapsed   begin     false    rational  val$:
)context! )start   .restart   class:    if       rational! var#:
)debug    )threads  .start     clear     infinity  rot       var$:
)elapsed  )time     .subclass: clone     load"    self      vm
)entries  )unmap"   .to_s      complex   max_float space     {
)globals  )version  .vm_name   copy      min_float spaces    {{
)irb      )vm      2drop      cr        nan      swap
)load"    )vm!     2dup       do        nil      switch
)map"     )words   :          dpr       nip      throw"
```

## Appendix A – Symbol Glossary

Symbol Map Entries =

!	.[]!	.denominator	.minutes
!:	.[]@	.do{{	.month
"	.abs	.dump	.months
&&	.acos	.e**	.name
)"	.acosh	.each{{	.new
)classes	.alive?	.elapsed	.new_size
)context	.angle	.emit	.new_value
)context!	.append	.empty?	.new_values
)debug	.append{{	.even?	.new{{
)elapsed	.as_days	.exit	.numerator
)entries	.as_hours	.floor	.odd?
)globals	.as_local	.fraction	.offset
)irb	.as_minutes	.gather	.open
)load"	.as_months	.gcd	.open{{
)map"	.as_seconds	.get_all	.p2c
)methods	.as_utc	.getc	.parent_class
)nodebug	.as_years	.gets	.peek
)noshow	.as_zone	.hour	.pend
)quit	.asin	.hours	.polar
)restart	.asinh	.hypot	.pop
)show	.atan	.imaginary	.posn
)start	.atan2	.init	.pp
)stubs	.atanh	.intervals	.push
)threads	.c2p	.is_class?	.r2d
)time	.call	.join	.rationalize_to
)unmap"	.call_v	.keys	.real
)version	.call_vx	.labels	.restart
)vm	.call_with	.largest_interval	.reverse
)vm!	.call_x	.lcm	.right
)words	.cbrt	.left	.right?
*	.ceil	.left?	.rjust
**	.cjust	.length	.round
+	.class	.lines	.round_to
-	.clear	.list	.rstrip
-infinity	.clone	.ljust	.scatter
.	.clone_exclude	.ln	.sec_frac
."	.close	.load	.second
.+left	.conjugate	.lock	.seconds
.+mid	.contains?	.log10	.select{{
.+midlr	.copy	.log2	.shell
.+right	.cos	.lstrip	.shuffle
.-left	.cosh	.magnitude	.sin
.-mid	.cr	.main	.sinh
.-midlr	.create	.map{{	.sleep
.-right	.create{{	.max	.sort
.1/x	.cube	.mid	.space
.10**	.current	.mid?	.spaces
.2**	.d2r	.midlr	.split
.:	.day	.min	.sqr
...:	.days	.minute	.sqrt

.start	0>=	VirtualMachine	nil=
.start_named	1+	[	nip
.status	1-	^^	not
.strip	2*	a_day	now
.strlen	2+	a_minute	or
.strmax	2-	a_month	over
.strmax2	2/	a_second	p!"
.subclass:	2drop	a_year	p"
.tan	2dup	accept	parse
.tanh	:	accept"	parse!
.throw	<	an_hour	pause
.time_s	<<	and	pi
.to_a	<=	begin	pick
.to_duration	<=>	class:	rational
.to_duration!	<>	clear	rational!
.to_f	=	clone	rot
.to_f!	>	com	self
.to_i	>=	complex	space
.to_i!	>>	copy	spaces
.to_lower	?dup	cr	swap
.to_n	@	distinct?	switch
.to_n!	Array	do	throw"
.to_r	Bignum	dpr	true
.to_r!	Class	drop	try
.to_s	Complex	dup	tuck
.to_t	Duration	e	val#:
.to_t!	FalseClass	epsilon	val\$:
.to_upper	Fixnum	f"	var#:
.to_x	Float	false	var\$:
.to_x!	Hash	format	vm
.unlock	InStream	gather	xor
.utc?	Integer	identical?	{
.values	Mutex	if	{{
.vm	NilClass	infinity	
.vm_name	Numeric	load"	~
.with{{	Object	local_offset	~"
.year	OutStream	max	~cr
.years	Procedure	max_float	~emit
/	Queue	min	~getc
0<	Rational	min_float	~gets
0<=	Stack	mod	~space
0<=>	String	nan	~spaces
0<>	Thread	neg	
0=	Time	nil	
0>	TrueClass	nil<>	

## Appendix B – Regular Expressions

Elements of syntax in this guide are expressed using regular expressions. While regular expressions are powerful and concise, they are also cryptic and non-intuitive. This summary provides a brief overview of those subset of regular expression elements used in this guide. It only provides a thread-bare overview of the subject of regular expressions and the reader is encouraged to seek further information on this complex subject.<sup>101</sup>

Expression Character	Description
.	Any character except newline
[A-Z]	Any uppercase alphabetical character.
[A-Za-z0-9_]	Any alphanumeric or underscore character.
\.	A single '.' character.
\/	A single '/' character
\\$	A single '\$' character.
\d	A digit (0..9)
x*	0 or more repetitions of the X expression.
x+	1 or more repetitions of the X expression.
^	The beginning of the line or string.
\$	The end of the line or string
other	Non-regex commands are expressions for themselves.

---

<sup>101</sup>For an excellent, interactive, free regular expression development tool see Rubular at <http://rubular.com/>



## Appendix C – Git


The fOOrth project's source code is managed through the git source version management system. Prior to version 0.0.4, all work, bug-fixes, updates, and improvements were all done on the master branch. Moving forward, this is not a suitable model for further development and a better, more manageable system is required.

The system adopted by the fOOrth project is that laid out in the blog “A successful Git branching model<sup>102</sup>”. Under this model, the master branch is reserved for ready-to-deliver code. All development efforts are shifted to the development branch.

Efforts of a short duration, like simple bug fixes, can be done directly on the development branch. Those with a longer duration or more uncertain outcome should be branched from the development branch with an appropriate descriptive name. These development branches are merged<sup>103</sup> back into the development branch or dropped as appropriate.

The development branch will be merged into the master branch to release new code. A release branch may be employed if the release complexity warrants using one.

Hot-fixes branch from the master and merges to both the master and development branches.

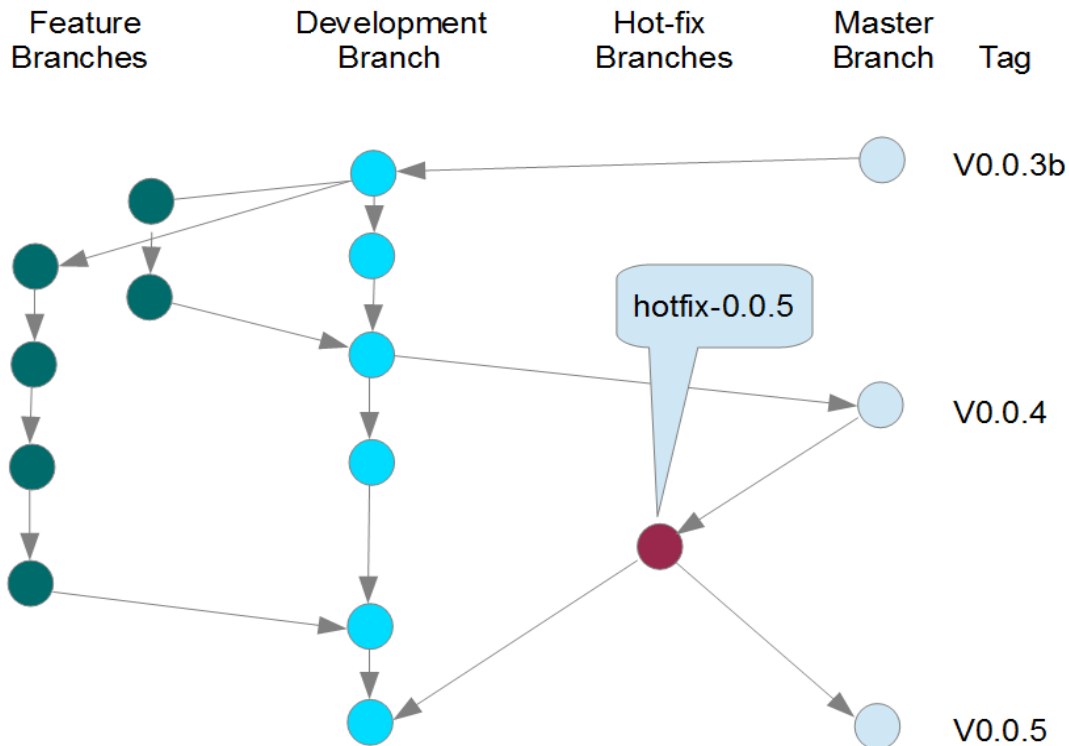

<sup>102</sup>This may be found at: <http://nvie.com/posts/a-successful-git-branching-model/>

<sup>103</sup>Git merges should always be done with the '--no-ff' option to avoid losing branch history information.





# Index

<b>0</b>		drop	23, 264	NilClass	69, 145
0<	165	Duck Typing	31	nip	23, 267
0<=	166	dup	23, 35, 264	not	186
0<=>	166	<b>E</b>		now	233
0<>	166	e	148, 265	Numeric	71, 147
0=	167	else	25, 266	<b>O</b>	
0>	167	end	271, 273	Object	69, 173
0>=	167	epsilon	148, 265	or	142
<b>1</b>		error	273	OutputStream	189
1-	119, 168	<b>F</b>		over	23, 267
1+	119, 168	f"	120, 184, 225, 246	<b>P</b>	
<b>2</b>		false	265	p!"	236
2-	120, 169	FalseClass	69, 121	p"	237
2*	119, 140, 168	finally	42, 43, 273	parse	237
2/	120, 140, 169	Float	123	parse!	237
2+	120, 168	format	120, 184, 225, 247	pause	230, 267
2drop	256	<b>G</b>		pi	149, 268
2dup	256	gather	96, 265	pick	23, 268
<b>A</b>		<b>H</b>		Polymorphism	54
a_day	109	Hash	127	Procedure	195
a_minute	109	<b>I</b>		Prototype	53
a_month	109	i	27, 262	<b>Q</b>	
a_second	109	identical?	184	Queue	199
a_year	110	if	25, 265	<b>R</b>	
accept	259	infinity	148, 266	Rake	15
accept"	259	Inheritance	51	rational	203, 268
again	29, 260	InStream	133	Rational	201
an_hour	110	Integer	137	rational!	203, 268
and	142	<b>J</b>		Referencing	32
Archive	16	j	27, 263	repeat	29, 261
Array	77	<b>K</b>		rot	269
<b>B</b>		Known Issues	16	Routing	61
begin	29, 260	<b>L</b>		Ruby	10
Boolean	69	Late Binding	54	<b>S</b>	
bounce	41, 43, 272	load"	266	Scoping	31
break	270	local_offset	232	self	67, 269
<b>C</b>		loop	27, 263	space	269
catch	40, 43, 272	<b>M</b>		spaces	269
Class	51, 97	max	184	Stack	205
class:	101, 261	max_float	149, 266	String	207
clone	35, 261	Method Mapping	55	super	98, 176, 252, 256
com	142	Methods	53	swap	23, 270
Commands	102, 276	min	185	switch	25, 270
complex	105, 261	min_float	149, 267	SymbolMap	55
Complex	103	mod	171	<b>T</b>	
copy	35, 261	Mutation	33	Testing	15
cr	262	Mutex	143	Thanks	10
<b>D</b>		<b>N</b>		then	25, 266
Declarations	31	nan	149, 267	Thread	227
Demo.rb	15	neg	171	throw"	44, 271
distinct?	183	nil	267	true	271
do	26, 262	nil<>	185	TrueClass	69, 249
dpr	148, 264	nil=	185	try	40, 43, 271

tuck	24, 273	.1/x	151	.emit	157, 191, 216
Typing	31	.10**	151	.empty?	87, 130, 199, 205
U		.2**	152	.even?	138
until	29, 260	.abs	152	.exit	228
V		.acos	152	.floor	158
v	196	.acosh	153	.fraction	240
val:	31, 98, 175, 252, 257	.alive?	228	.gather	87, 138
val@:	32, 99, 175, 253, 257	.angle	153	.gcd	138
val#:	32, 273	.append	189	.get_all	133
val\$:	32, 274	.append{{	190	.getc	134
var:	31, 99, 175, 253, 257	.as_days	114	.gets	135
var@:	32, 99, 175, 253, 257	.as_hours	114	.hour	240
var#:	32, 274	.as_local	239	.hours	115
var\$:	32, 275	.as_minutes	114	.hypot	158
VirtualMachine	251	.as_months	114	.imaginary	158
vm	275	.as_seconds	115	.init	32, 178
W		.as_utc	239	.intervals	112
while	260	.as_years	115	.is_class?	99, 178
X		.as_zone	239	.join	88, 138, 229
x	196	.asin	153	.keys	130
xor	142	.asinh	154	.labels	113
^		.atan	154	.largest_interval	116
^^	122, 145, 183	.atan2	154	.lcm	139
-		.atanh	155	.left	88, 216
-	113, 151	.c2p	155	.left?	217
->	127p.	.call	196, 215	.length	88, 131, 200, 205, 217
-i	27, 263	.call_v	197	.lines	217
-infinity	147, 254	.call_vx	197	.list	227
-j	27, 263	.call_with	197	.ljust	217
-		.call_x	197	.ln	158
-	238	.cbrt	104, 155	.load	218
;		.ceil	155	.lock	144
;	99, 176, 253, 257	.cjust	215	.log10	159
:		.class	176	.log2	159
:	63, 256	.clear	199, 205	.lstrip	218
!		.clone	35, 176	.magnitude	159
!	81	.clone_exclude	37, 177	.main	228
!:	252	.close	134, 191	.map{{	89
?		.conjugate	156	.max	89
?"	41, 43, 272	.contains?	215	.mid	90, 218
?break	271	.copy	35, 177	.mid?	218
?dup	258	.cos	156	.midlr	90, 219
.		.cosh	156	.min	91
.	174, 191	.cr	191	.minute	240
.-left	84, 214	.create	190	.minutes	116
.-mid	84, 214	.create{{	190	.month	241
.-midlr	85, 214	.cube	156	.months	116
.-right	85, 215	.current	227	.name	179
..	63, 97, 254	.d2r	157	.new	79, 100
..:	63, 174, 254	.day	240	.new_size	80
."	212	.days	115	.new_value	80
.[]!	86, 129	.denominator	157	.new_values	80
.[]@	86, 129	.do{{	143p.	.new{{	79, 228
.+left	82, 213	.dump	254	.numerator	160
.+mid	82, 213	.e**	104, 157	.odd?	139
.+midlr	83, 213	.each{{	87, 130, 216	.offset	241
.+right	83, 214	.elapsed	254	.open	133

.open{}	134	.to_duration!	94, 118, 179	)version	281
.p2c	160	.to_f	124, 180	)vm	59, 281
.parent_class	100	.to_f!	124, 180	)vm!	59, 281
.peek	206	.to_i	139, 180	)words	282
.pend	200	.to_i!	140, 180	[	
.polar	160	.to_lower	221	[	78, 258
.pop	200, 206	.to_n	164, 180	]	
.posn	219	.to_n!	165, 180	]	78
.pp	91, 131	.to_r	124, 181, 202	{	
.push	200, 206	.to_r!	125, 181, 202	{	127p., 275
.r2d	161	.to_s	94, 101, 118, 131, 181, 222, 255	{{	195, 275
.rationalize_to	161, 204	.to_t	94, 164, 222, 243	}	127p.
.real	161	.to_t!	95, 164, 222, 244	}}	196
.restart	255	.to_upper	222	@	
.reverse	91, 219	.to_x	105, 181	@	95
.right	92, 220	.to_x!	105, 181	*	
.right?	220	.unlock	144	*	113, 150, 212
.rjust	220	.utc?	244	**	150
.round	161	.values	132	/	
.round_to	162	.vm	230	/	119, 165
.rstrip	220	.vm_name	255	&	
.scatter	92	.with{}	68, 182	&&	121, 145, 173
.sec_frac	241	.year	244	+	
.second	241	.years	118	+	81, 113, 150, 212, 238
.seconds	117	"		+loop	27, 264
.select{}	92	"	253	<	
.shuffle	93	)		<	169, 223, 245
.sin	162	)"	276	<<	95, 141, 223
.sinh	162	)classes	276	<=	170, 223, 245
.sleep	162, 229	)context	57, 277	<=>	170, 224, 245
.sort	93	)context!	57, 277	<>	182
.space	192	)debug	277	=	
.spaces	192	)elapsed	278	=	183
.split	93, 104, 201, 221	)entries	278, 283	>	
.sqr	163	)globals	278	>	170, 224, 246
.sqrt	104, 163	)irb	278	>=	171, 224, 246
.start	198, 229, 255	)load"	279	>>	141
.start_named	198	)map"	279		
.status	229	)methods	102, 187		122, 146, 186
.strip	221	)nodebug	279	~	
.strlen	179	)noshow	279	~	192
.strmax	94	)quit	279	~"	192
.strmax2	131	)restart	280	~cr	193
.subclass:	100	)show	280	~emit	193
.tan	163	)start	280	~getc	135
.tanh	163	)stubs	102	~gets	135
.throw	44, 221	)threads	280	~space	193
.time_s	242	)time	281	~spaces	193
.to_a	117, 242	)unmap"	281		
.to_duration	94, 117, 179				



## Edit History:

PCC – December 14, 2014 – Initial draft of User's Guide started.

PCC – May 14, 2015 – Completed the initial draft.

PCC – May 26, 2015 – Added revisions developed during sabbatical.

PCC – May 28, 2015 – Added Appendix C – Git

PCC – June 2, 2015 – Added more detailed descriptions of Array and Hash literals.

PCC – June 11, 2015 – V0.1.0

PCC – June 15, 2015 – V0.2.0

PCC – July 25, 2015 – V0.3.0

PCC – August 11, 2015 – V0.4.0

– Stuff stored here for use throughout. Delete someday.

[before] word [after]

Routing:

description

Code	Result

### ***Local Methods:***

[before] word [after] (h4)

Routing: Compiler Context.

description

Code	Result